Product data sheet

Specifications



Discontinued

Monolithic pre wired tower light, Harmony XVC, plastic, red orange green, 60mm, base mounting, steady or flashing, buzzer, IP54, 24V AC DC

XVC6B35SK

Discontinued on: May 31, 2026

Product availability: Stock - Normally stocked in distribution facility

Main

Range of Product	Harmony XVC6
Product or Component Type	Complete pre-wired monolithic tower light
Beacon or indicator bank unit type	3 illuminated units
Sound signalling	Buzzer
Mounting diameter	2.4 in (60 mm)
Component name	XVC
Light source	LED steady or flashing red LED steady or flashing orange LED steady or flashing green
[Us] rated supply voltage	24 V
Supply circuit type	AC/DC
Noise level	70…85 dB continuous or intermittent tone)1 m

Complementary

Material	Polycarbonate: illuminated unit ABS (acrylonitrile butadiene-styrene): base unit PBT + ABS (UL94HB): top cover
Product mounting	On base
Cable cross section	0.0005 in² (0.33 mm²)
AWG Gauge	22 AWG
Cable length	33.5 in (850 mm)
Marking	CE
[Uimp] rated impulse withstand voltage	0.8 kV
Current Consumption	115 mA
Fundamental frequency	2.23 kHz
Flashing frequency	1 Hz
Net Weight	0.7 lb(US) (0.3 kg)
Height	7.9 in (200.8 mm)

Environment

Price is “List Price” and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Standards	IEC 61000-6-4 IEC 61000-6-3 IEC 61000-6-2
Product Certifications	UL
Protective treatment	TC
Ambient Air Temperature for Storage	-31…158 °F (-35…70 °C)
Ambient Air Temperature for Operation	14…122 °F (-10…50 °C)
Electrical shock protection class	Class II conforming to IEC 61140
IP degree of protection	IP54 flat surface installation IEC 60529

Ordering and shipping details

Category	US100XV22617
Discount Schedule	00XV
GTIN	3606480032714
Returnability	Yes
Country of origin	ID

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	3.465 in (8.800 cm)
Package 1 Width	3.346 in (8.500 cm)
Package 1 Length	19.882 in (50.500 cm)
Package weight(Lbs)	18.624 oz (528.000 g)
Unit Type of Package 2	S04
Number of Units in Package 2	10
Package 2 Height	11.811 in (30.000 cm)
Package 2 Width	15.748 in (40.000 cm)
Package 2 Length	23.622 in (60.000 cm)
Package 2 Weight	14.489 lb(US) (6.572 kg)

Contractual warranty

Warranty (in months)	18

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

Environmental footprint

Total lifecycle Carbon footprint	**25 kg CO2 eq.**
Carbon footprint of the manufacturing phase [A1 to A3]	**3 kg CO2 eq.**
Carbon footprint of the distribution phase [A4]	**0.1 kg CO2 eq.**
Carbon footprint of the installation phase [A5]	**0.6 kg CO2 eq.**
Carbon footprint of the use phase [B2, B3, B4, B6]	**20 kg CO2 eq.**
Carbon footprint of the end-of-life phase [C1 to C4]	**0.5 kg CO2 eq.**

Use Better

Materials and Substances

Packaging made with recycled cardboard	**Yes**
Packaging without single use plastic	**Yes**
EU RoHS Directive	**Compliant By Exemption**
California proposition 65	**WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov**

Use Again

Repack and remanufacture


Take-back	**No**


Dimensions Drawings

Pre-assembled and Pre-wired Tower Light

Dimensions

Below drawing shows the maximum configuration of the product. Select the number of stages according to the product characteristics in order to get **b** dimension.



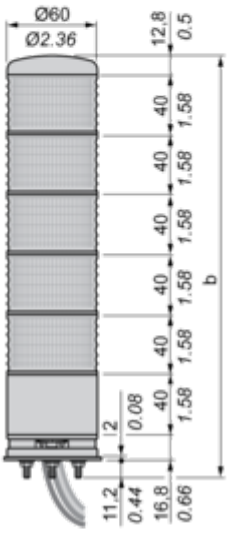

No. of illuminated units	b (mm)	b (in.)
1 stage	120.8	4.76
2 stages	160.8	6.33
3 stages	200.8	7.90
4 stages	240.8	9.48
5 stages	280.8	11.06

Mounting and Clearance

Pre-assembled and Pre-wired Tower Light

Mounting on Horizontal Support (Direct or with Fixing Plate)

Panel cut-out




Image of product / Alternate images

Alternative











