


Elegance-LS Shower Door Style B

SHOWER DOOR AND INLINE PANEL INSTALLATION INSTRUCTIONS

IMPORTANT

DreamLine® reserves the right to alter, modify or redesign products at any time without prior notice. For the latest up-to-date technical drawings, manuals, warranty information or additional details please refer to your model's web page on **DreamLine.com**

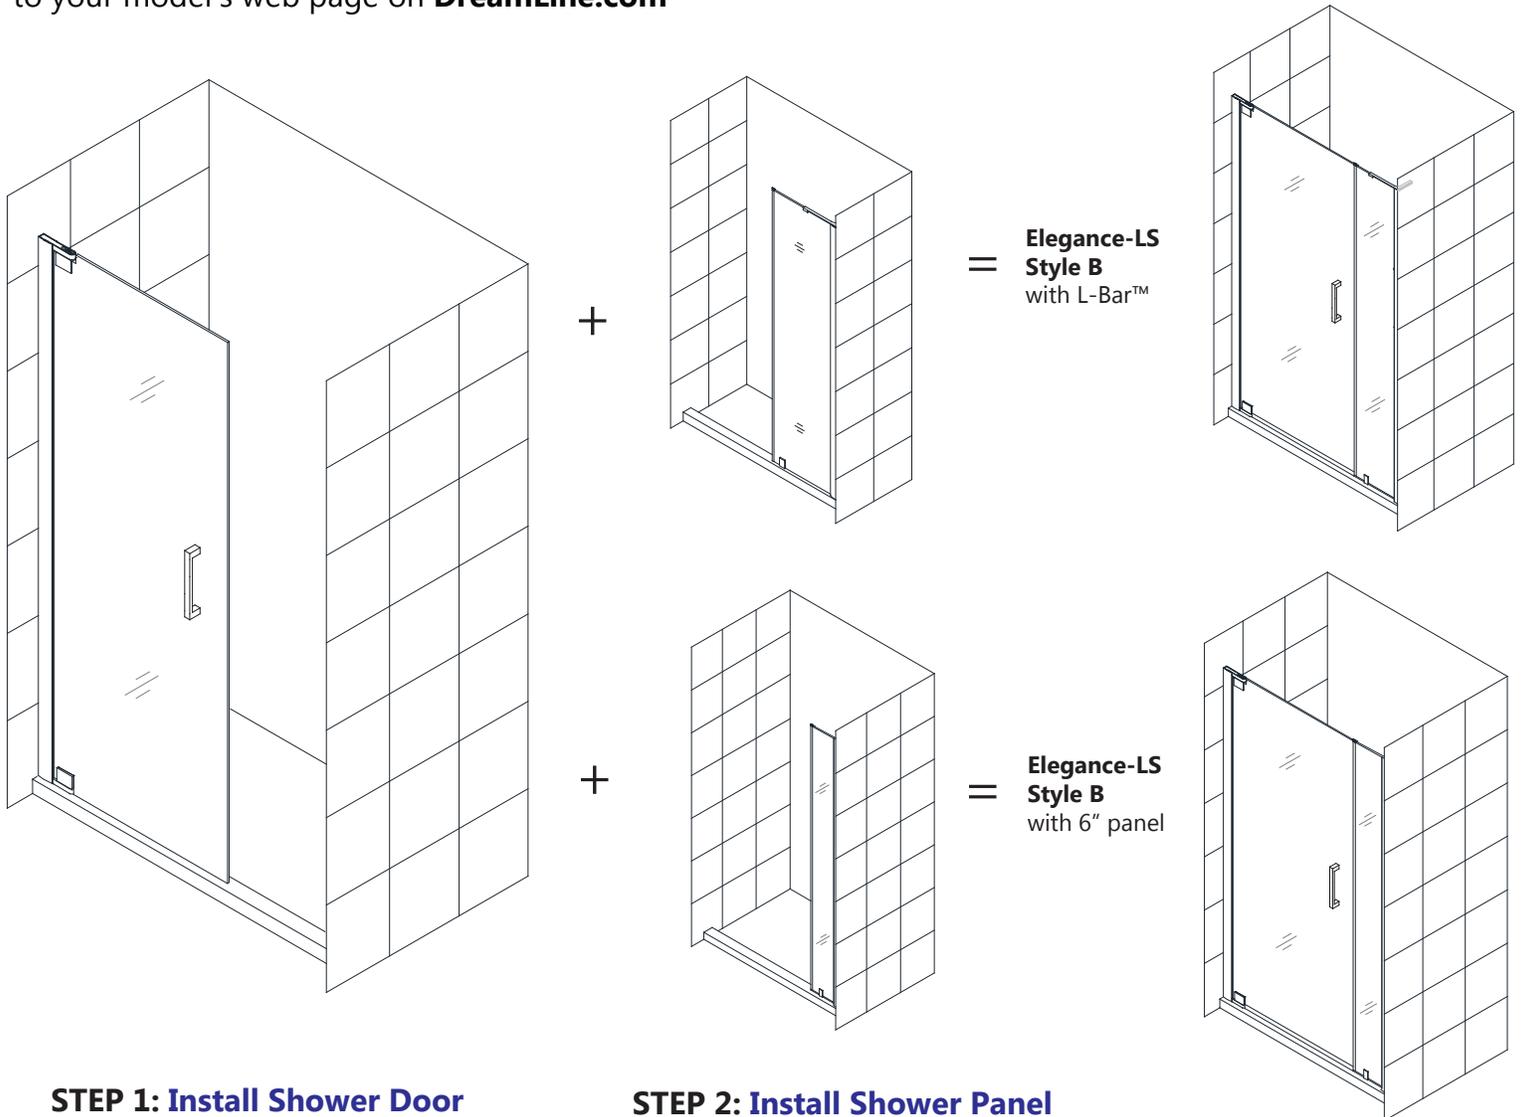

STEP 1: Install Shower Door

STEP 2: Install Shower Panel



Questions?

Please contact DreamLine Customer Support
See DreamLine.com for hours of operation


Support@DreamLine.com

1-866-731-2244



ELEGANCE/ELEGANCE-LS (STYLE A) SINGLE DOOR SHOWER DOOR *INSTALLATION INSTRUCTIONS*


PLEASE REVIEW THIS ENTIRE MANUAL PRIOR TO INSTALLATION

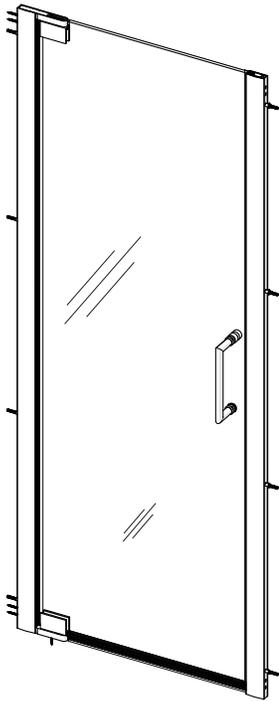

Elegance

Model #s:

SHDR-4125720-##
SHDR-4127720-##
SHDR-4128720-##
SHDR-4130720-##
SHDR-4132720-##
SHDR-4134720-##
SHDR-4135720-##

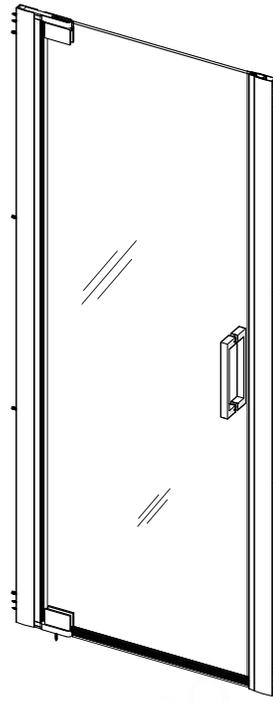

Elegance-LS

Model #s:

SHDR-4325000-##
SHDR-4327000-##
SHDR-4328000-##
SHDR-4330000-##
SHDR-4332000-##
SHDR-4334000-##
SHDR-4335000-##

= Finish:

01 = Chrome
04 = Brushed Nickel
06 = Oil-Rubbed Bronze
09 = Satin Black

*left swing door installation shown

IMPORTANT!

DreamLine[®] reserves the right to alter, modify or redesign products at any time without prior notice for the purpose of product improvement and customer experience. Please refer to the model's web page on **DreamLine.com** for the latest technical drawings, installation manuals, warranty information or additional product details.

Do Not Return Product to the Store. Contact DreamLine[®] with any questions



Questions?

Please contact DreamLine Customer Support
See DreamLine.com for hours of operation

Support@DreamLine.com

1-866-731-2244





Do not remove ClearMax stickers until glass is installed.



This model is treated with DreamLine's exclusive ClearMax™ Glass technology. This is a specially formulated coating that prevents the build up of soap and water spots.

Install the surface with the ClearMax™ label towards the inside of the shower. Please note that depending on the model, the glass may be coated on either one or both surfaces.

For best results, squeegee the glass after each use and dry with a soft cloth.

Record the following purchase information for your records or in the event you need to contact DreamLine®:

Purchase Order Number _____

Store/Vendor Purchased From _____

Installation Date _____

OD Number (optional) _____
*found on the shipping box or label if available.

Installed By: _____

SKU Number _____

Table of Contents

Section Title	Page #
ClearMax® Coating Information	—
Warnings and General Preparation	2
Model Specific Preparation	3
Tools	4
Configurations	5
Adjustable Wall Profile System	6
Detailed Diagram of Shower Door Components	7
Parts List	8-9
Installation Steps	10-26
Strike Profile Installation	20
Decorative Cover Installation	24
Bottom Sweep Vinyl Installation	25
Securing the Bottom Pivot Assembly to the Threshold (optional)	27
Product Maintenance	28
Troubleshooting	29
Factory Parts Information	30-32

Symbol Legend



TIP - for ease of installation.



CORRECT - recommended.



NOTE - take note of special feature; additional information.




INCORRECT - not recommended.



REQUIRED - requires special attention; signifies a warning.

Average Installation Time

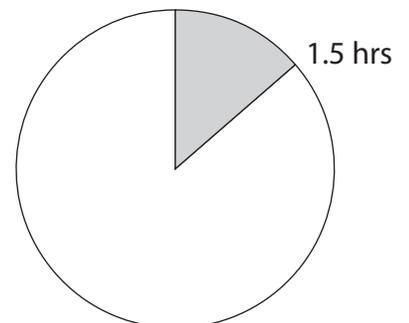



IMPORTANT

- DreamLine® reserves the right to alter, modify or redesign products any time without prior notice for product improvement and customer experience. Please refer to the model's web page on DreamLine.com for the latest technical drawings, installation manuals, warranty information or additional product details.
- This product should be installed by someone familiar with the construction requirements for this type of project and the care necessary for the safe installation and operation of the product.
- The safety of any installation is the responsibility of the installer.
- Professional installation recommended. (*All Models*)
- Professional installation required. (*Enigma Series*)
- To prevent damage or serious injury; Do Not lean against the installed panel/door/glass.
- To prevent damage or serious injury; Do Not attempt to lift or move a heavy lite of glass alone. Use an assistant and/or a professional grade glass suction cup.
- The installation of some models may require drilling down into the threshold. Contact the manufacturer of the base, tub, or threshold material with any questions regarding the drilling of holes into their product.
- All drawings in this installation manual are for illustrative purposes only and are not drawn to scale.

TEMPERED GLASS WARNING

- Your Shower Door Glass Could Shatter Without Warning if Improperly Installed or Mishandled
- Do Not install or operate a shower door if the glass has chipped corners, slivered edges or is otherwise damaged and/or has been dropped or banged into a hard surface such as tile, marble or glass.
- **The main causes of tempered glass breakage are:**
 - Improper handling, storage or installation
 - Misuse/abuse
 - Lack of maintenance
 - Failure to replace damaged glass
 - **Improper handling during storage, unpacking and installation:**
 - Corners and edges are the most susceptible area to damage on a lite of tempered glass and should be protected and handled with care during storage, unpacking, installation and operation. A concentrated point of pressure or impact with a surface harder than itself may cause the tempered glass to shatter. The tempered glass may release immediately, within several hours or even days later.
 - **Incorrect installation of door hardware, rollers, hinges, channels, stopper or glass:**
 - Improper installation may include: loose hardware and/or lack of proper gaskets between the hardware and glass. Additionally, improper alignment of guide rails, wall profiles or other hardware during installation or operation may place stress on the glass edges and cause it to break.
 - This product must be installed by a professional and experienced installer familiar with the safe handling of tempered glass.
 - **Improper use of this product:**
 - Aggressively opening or closing the door may cause trauma to the glass, which can lead to breakage. This may occur immediately or hours or even days later.
 - **The shower door hardware and glass should be inspected periodically:**
 - Instruct the homeowner how to perform a periodic inspection of the shower hardware and glass - some minor adjustments may be necessary based upon the use (or misuse) of the shower door. Ensure that the hardware remains tight and that the door alignment and operation are correct. Any adjustments should be made upon discovery to prevent damage to the product.
 - Additional considerations should be given to the installation of frameless tempered glass products in households with young children or an elderly person due to an increased chance of improper handling. In such cases, alternatives such as shower curtains or grab bars should be considered.

GENERAL PREPARATION

- After opening all boxes and packages, read this introduction carefully. Check that all the items are included in the package by marking off the components on the "**Detailed Diagram of Product Components**" page. Examine all boxes and packages for shipping damage. If the unit has been damaged, has a finishing defect, or is missing parts; please contact our Customer Support department within 3 business days of the delivery date. **Please note that DreamLine® will not replace any damaged products or missing parts free of charge after 3 business days or if the product has been installed.** Please contact DreamLine® if you have any questions.
- **Please note that you should refer to your local building codes with questions on installation compliance standards. Building and plumbing codes may vary by location, and DreamLine® is not responsible for code compliance standards for your project and will not accept any returns.**
- If this unit is going to be installed in a new construction, install all the required plumbing and drainage before installing the shower. **Use a competent and licensed (if required by local code) plumber for all plumbing installation.**
- Make sure that prior to beginning the installation, the surfaces are leveled and solid and will be able to support the total weight of the unit. Also make sure the walls are at right angles. Irregular installation surface level, radius corners or improper angle of side walls will result in serious problems for your installation. Please note that some adjustments and drilling will be necessary during the installation process.
- Protect all primary surfaces of the product during installation. Never set your glass down directly onto a tile floor. Leave corner protectors in place until it is necessary to remove them. Always use a piece of wood or cardboard to protect the bottom edge and corners of the glass prior to and during installation.
- This unit must be installed upon a finished threshold and against finished walls.
- *DreamLine® shower doors are not designed to be installed into a fiberglass surround due to the radius corners and lack of a solid surface to mount the hardware.*

WARNING: TO AVOID THE RISK OF DAMAGE OR INJURY:

- **Follow all recommendations and requirements as shown in the installation instructions.**
- Perform a thorough inspection of the glass and all parts for any damage prior to installation. Any damage to tempered glass can cause breakage. **Do Not install damaged glass!**
- Do Not install or operate a shower or tub door if the glass has chipped corners, slivered edges or is otherwise damaged. Do Not install or operate a shower or tub door that has been dropped or banged into a hard surface such as tile, marble or glass.
- **CAUTION:** Contact with any hard surface can damage tempered glass and cause it to shatter.
- This product uses tempered glass. Glass cannot be cut after it has been tempered. **Do Not attempt to cut tempered glass.**
- DreamLine® Glass Shower doors, Tub doors, Inline panels, and Return panels can shatter due to improper handling or lack of maintenance. Conduct periodic inspections of glass and all parts for possible damage, missing or loose parts.
- Always wear proper safety equipment such as: safety goggles, work gloves and appropriate footwear during the installation process.
- **WARNING. Risk of leakage and/or damage.** Follow all instructions regarding the application of silicone sealant or caulk. Allow 24 hours for the sealant to cure before the initial use of the shower or tub product. Follow the silicone manufacturer's recommendations regarding the use of their product.
- **Thoroughly read these instructions before installing or using this product.**
- **Leave this manual for the end-user of the product.**



This product should be installed by someone familiar with the construction requirements for this type of project and the care necessary for the safe installation and operation of the product.




Model Specific Preparation






REQUIRED:




1" (25.4mm) maximum out-of-plumb adjustment per side. Verify finished walls with a level.



Threshold must be level

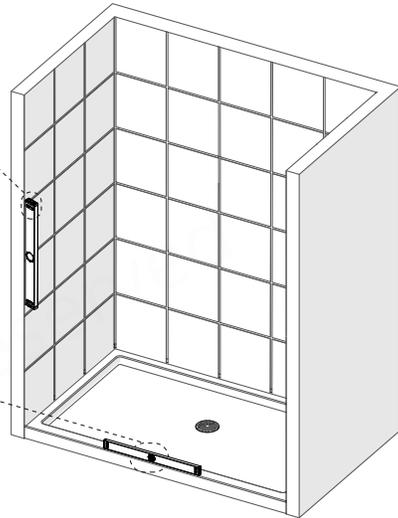

Tile


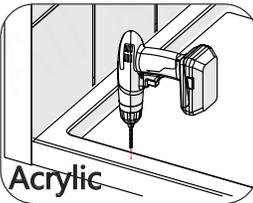


Acrylic



Contact the manufacturer of the base, tub or threshold material with any questions regarding the drilling of holes into their product.


This model has an adjustable wall profile system that allows for up to 1" (25.4mm) per side for Out-of-Plumb wall conditions and overall width within the model size. For more information, see the Adjustable Wall Profile System on page 6.

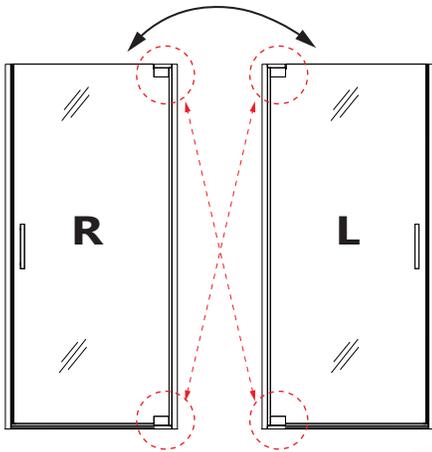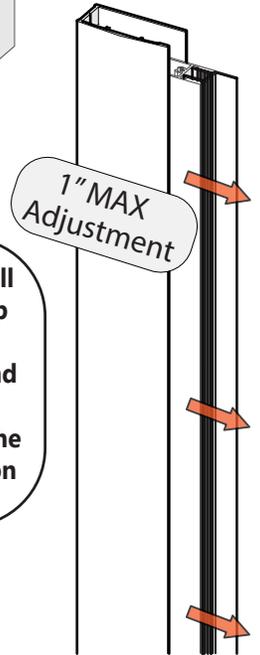

This door is reversible for right or left-swing door installation. The left-swing door installation is shown as an example throughout this manual. For the right-swing door installation, simply begin on the opposite wall and reverse the orientation of the installation steps shown.



DO NOT install the Handle onto the Door Glass until instructed. **DO NOT** attempt to lift the glass with the Handle. This could result in damage to the glass and/or serious personal injury. Always use an assistant or a professional-grade glass suction cup when handling heavy glass.

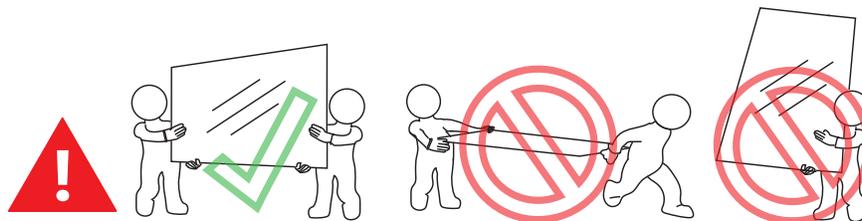


Professional installation recommended. Two installers required.

Tools




Level




Tape Measure



Pencil



Phillips
Screwdriver



Silicone



Screw Gun
or Impact Driver



Power
Drill



Drill Bit
Ø1/8"
(3mm)



Drill Bit
Ø3/16"
(4mm)



Drill Bit
Ø1/4"
(6mm)




Drill Bit
Ø5/16"
(8mm)




Soft Head
Hammer



Painter's Tape



Razor Knife



Professional-grade
Glass suction cup



Safety Glasses



Work Gloves



Verify that the correct model size has been ordered; measure the finished opening **before** proceeding with the installation.

Confirm that the finished walls are plumb and the threshold is level and pitched into the shower area.


Use a good quality waterproof, mildew-resistant 100% silicone caulk.

Cover the shower/tub drain with tape prior to installation to prevent the loss of screws or small parts.



Unpack your unit carefully and inspect it. Lay it out and identify all parts using the **Detailed Diagram** on page 7; and packing list in this manual as a reference. Before discarding the carton, check for small hardware bags that may have fallen to the bottom of the box. If any parts are damaged or missing, please contact DreamLine® for replacement. The shipping boxes may contain extra parts not used in your model configuration. Retain these installation instructions for future reference.

Configurations

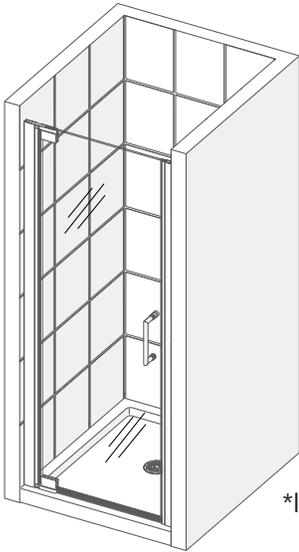

SHDR-4125720-##
SHDR-4127720-##
SHDR-4128720-##
SHDR-4130720-##
SHDR-4132720-##
SHDR-4134720-##
SHDR-4135720-##

*left-swing door installation shown

ELEGANCE
Single Door




Single-sided handle



SHDR-4325000-##
SHDR-4327000-##
SHDR-4328000-##
SHDR-4330000-##
SHDR-4332000-##
SHDR-4334000-##
SHDR-4335000-##



*left-swing door installation shown

ELEGANCE LS
Single Door



Double-sided handle

Elegance and Elegance-LS models are also available with inline panels in various widths. Panels 12" or larger include an L-Bar™. See all models at DreamLine.com

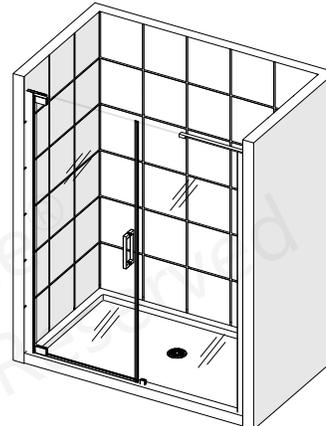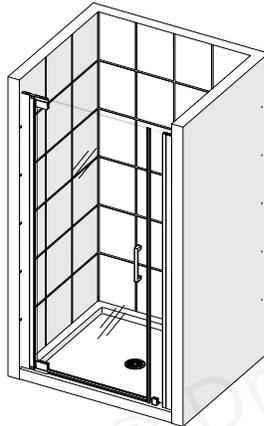

*Left-Swing door installation shown









This manual describes the single door installation of the ELEGANCE and ELEGANCE LS models.

For models with additional inline panel glass, **use this manual first to install the door**, and then use the manual packaged with the panel glass to install the panel.


Two-Part Adjustable Wall Profile System



The Glass Profiles can be adjusted up to 1" within the Wall Profiles for overall width or to correct for out-of-plumb conditions within the model size. Screw them together only after making final adjustments.

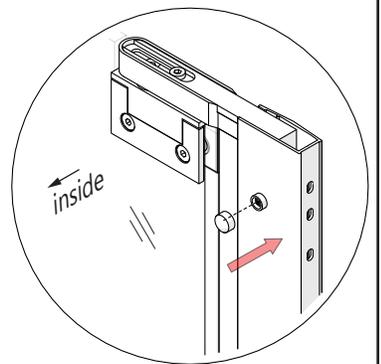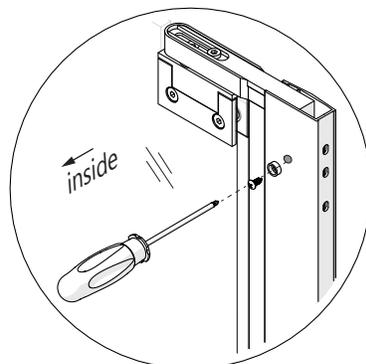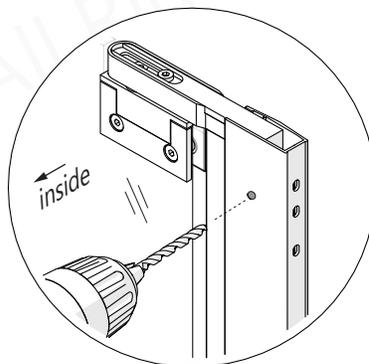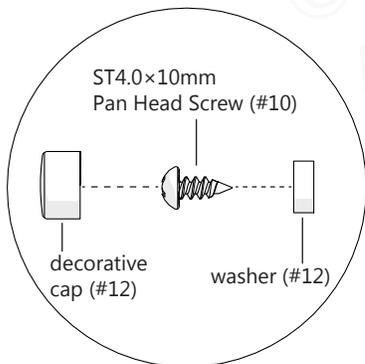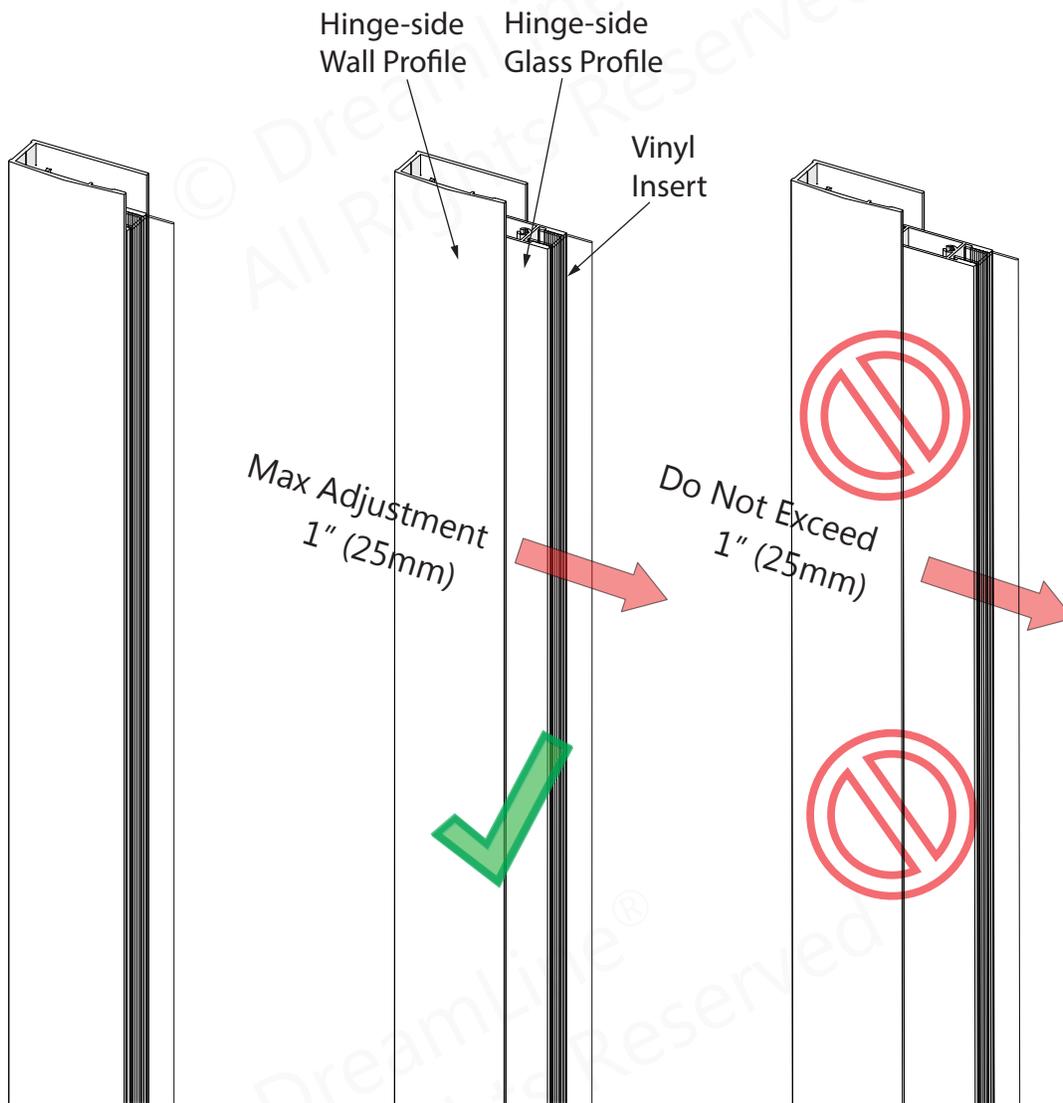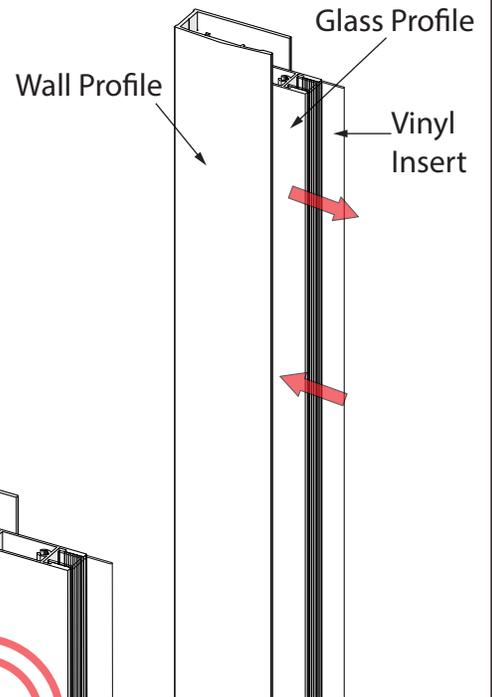


Detailed Diagram of Elegance Shower Door Components

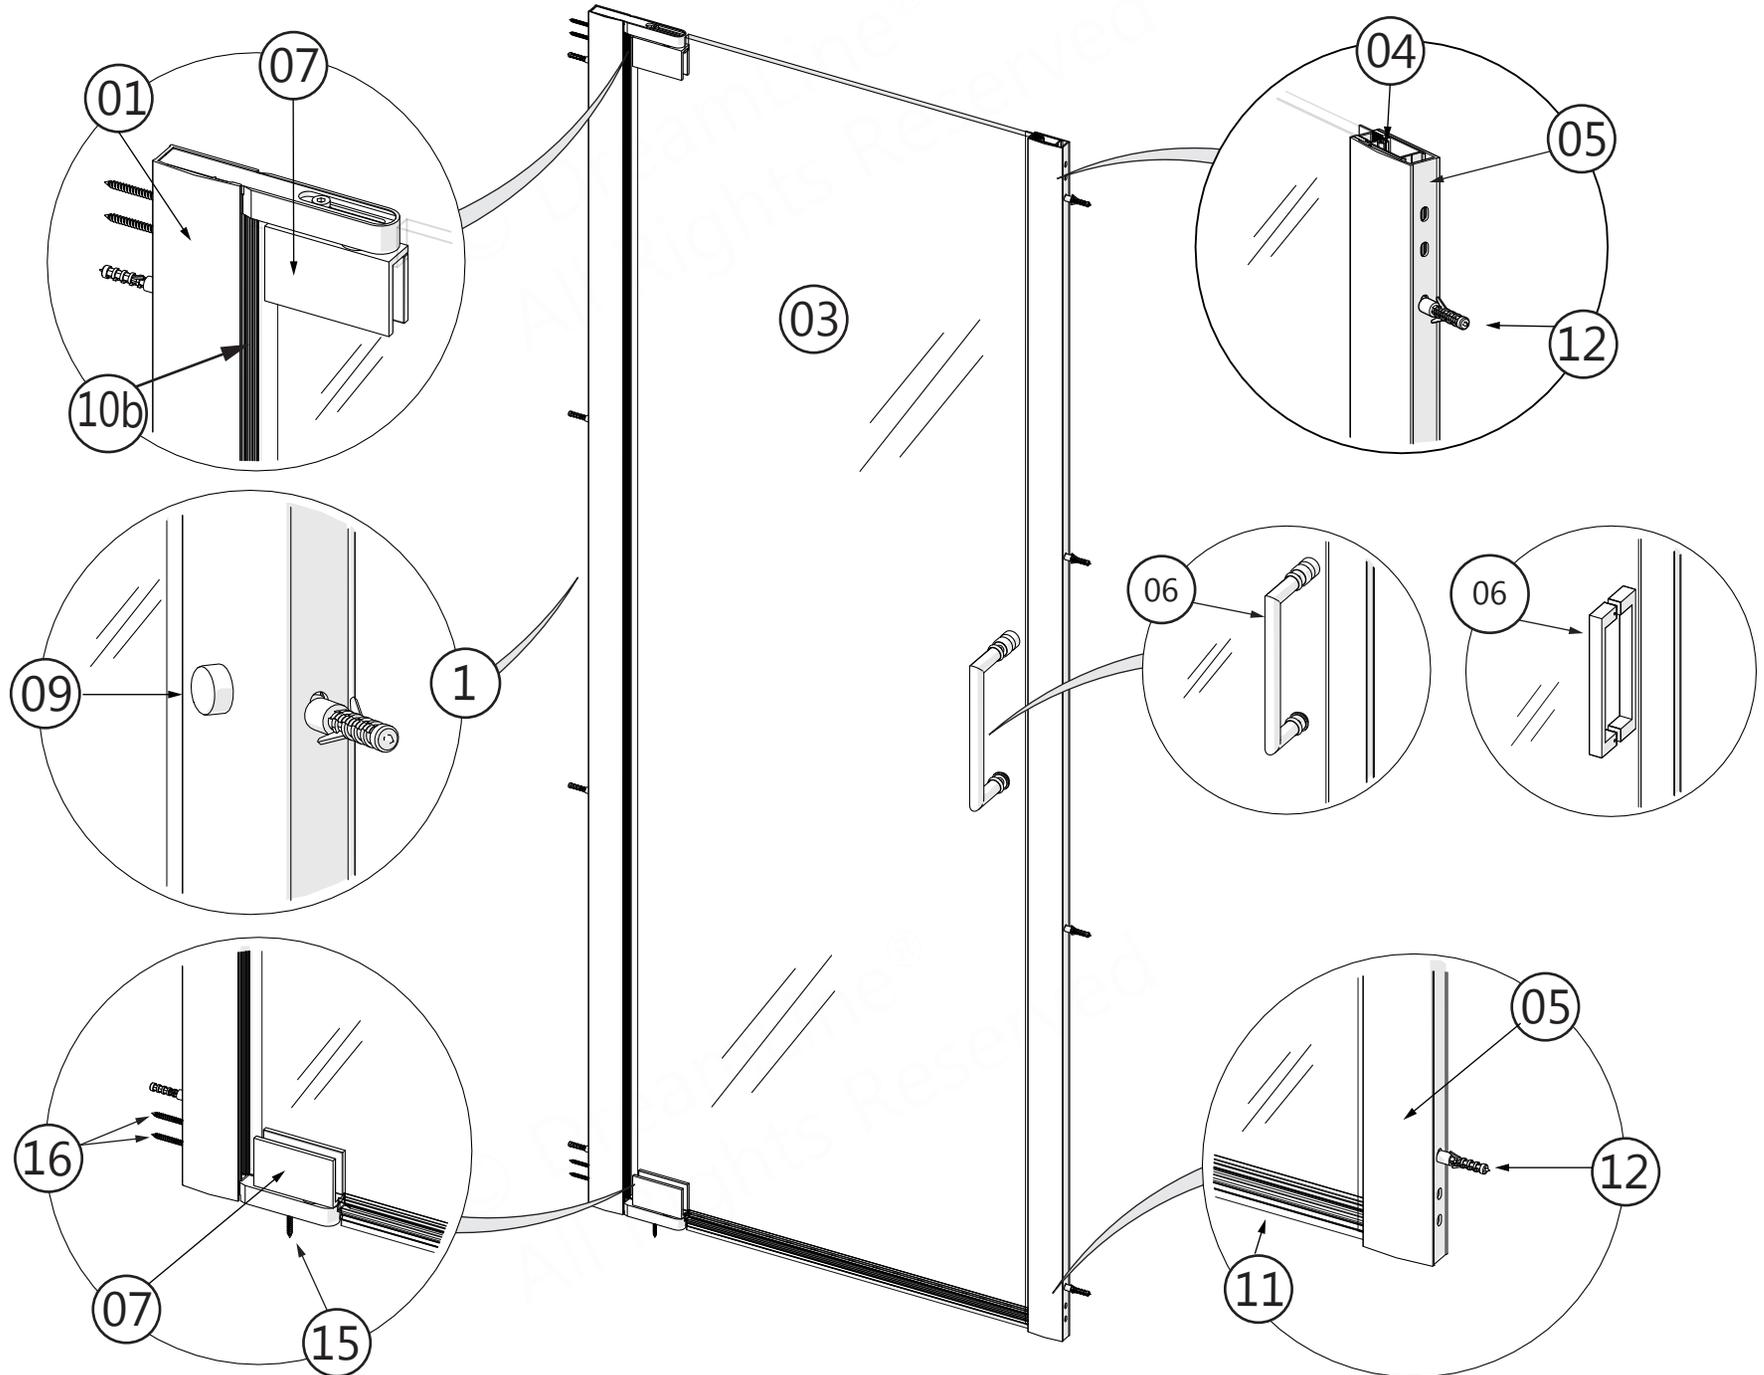


Parts List

01

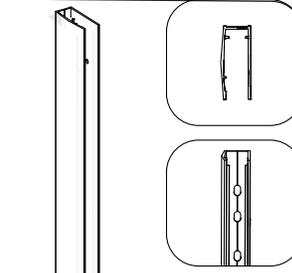


Wall Profile
Hinge Side (Shorter) **x1**

02

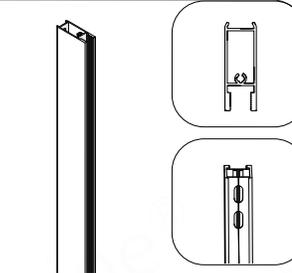


Glass Profile
Hinge side (Shorter) **x1**

03

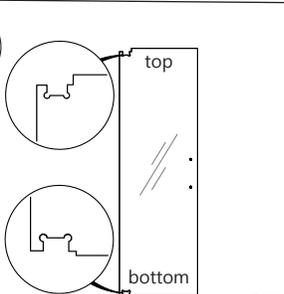


Door Glass **x1**

04

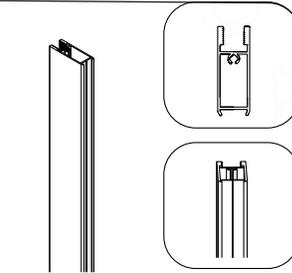


Glass Profile
Strike side (Longer) **x1**

05

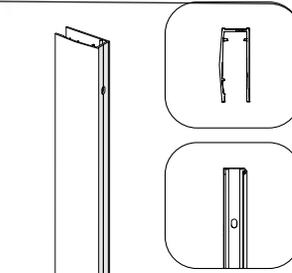

Wall Profile
Strike Side (Longer) **x1**

06 *handle styles may vary by model

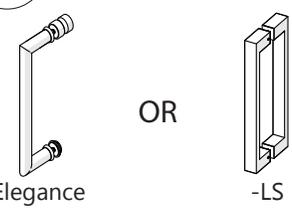


OR

Elegance -LS


Handle **x1**

07

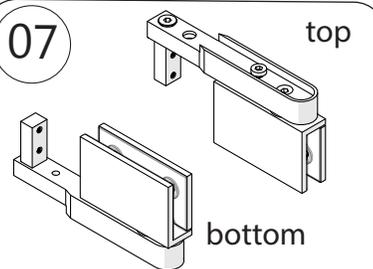


Pivot Assembly-
Top and Bottom **x2**

08

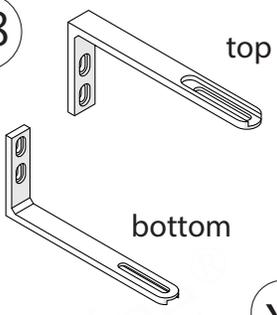


Pivot Retainer **x2**

09



Decorative Cover
and washer **x2**

10

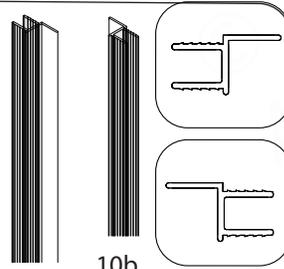


10a
72'''

10b
70-5/8'''


Bumper Seals **x2**

11

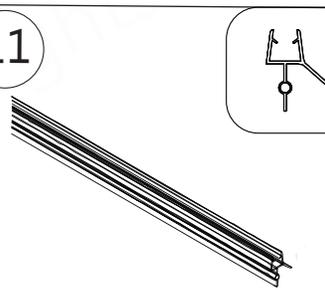

Bottom Sweep **x1**


12



Wall Anchor **x12**

Parts List

13

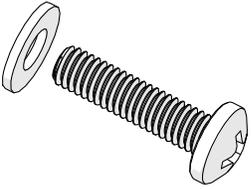

M4 x 16 Bolt with Washer **x4**

14




ST4.2x10 Pan Head Screw **x8**

15




ST4.2x25 Flat Head Screw **x2**

16




ST4.2 x 40mm Truss Head Screw **x13**

17



M6x12mm Round Head Socket Bolt **x1**

18




M6x12mm Countersunk Hex Head Screw **x1**

! It is not necessary to fully disassemble the Pivot Assemblies for installation.


! The Pivot Assemblies are paired and either one can be used as the top or bottom pivot depending on the handing of the door installation. See note* below.

Parts per Pivot Assembly-A

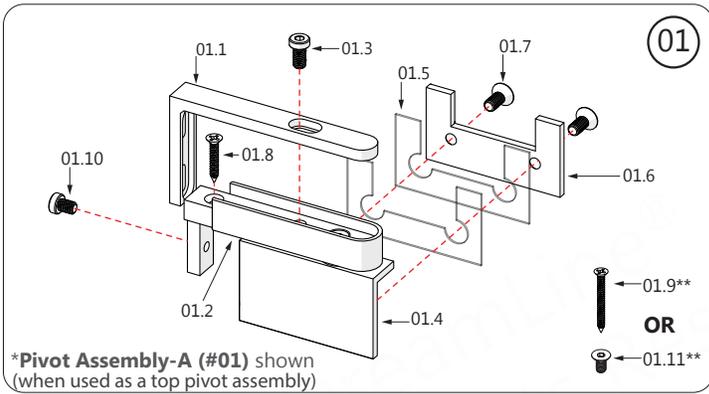

Pivot Assembly A		
ITEM #	ITEM DESCRIPTION	QTY
01.1	Pivot Retainer	1 pc
01.2	Pivot Bracket	1 pc
01.3*	M6 x 12 Socket Head Hex Screw	1 pc
01.4	Pivot Body	1 set
01.5	Clear Gasket	2 pcs
01.6	Back Plate	1 pc
01.7	M6 x 14 Countersunk Hex Screw	2 pcs
01.8	ST4.2x25mm Countersunk Screw	1pc
01.9	ST4.2 x 40 Countersunk Screw	1 pc
01.10**	M6x12 Hex Socket Head Cap Screw	1 pc
01.11**	M6x12 Countersunk Hex Head Screw	1 pc

Parts per Pivot Assembly-B

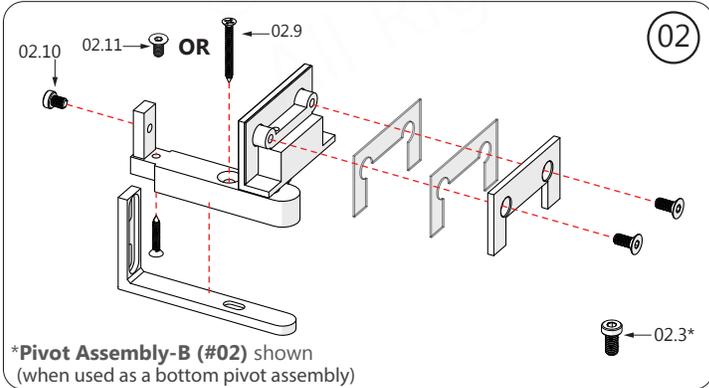

NOTE

- *When used as a top pivot assembly: use screw / item #01.3/02.3
- **When used as a bottom pivot assembly: use either screw / item #01.10/02.10 or #01.11/02.11

Pivot Assembly B		
ITEM #	ITEM DESCRIPTION	QTY
02.1	Pivot Retainer	1 pc
02.2	Pivot Bracket	1 pc
02.3*	M6 x 12 Socket Head Hex Screw	1 pc
02.4	Pivot Body	1 set
02.5	Clear Gasket	2 pcs
02.6	Back Plate	1 pc
02.7	M6 x 14 Countersunk Hex Screw	2 pcs
02.8	ST4.2x25mm Countersunk Screw	1pc
02.9	ST4.2 x 40 Countersunk Screw	1 pc
02.10**	M6x12 Hex Socket Head Cap Screw	1 pc
02.11**	M6x12 Countersunk Hex Head Screw	1 pc



Installation Steps

1


Glass Profile Height Difference

Wall Profile Glass Profile

Glass Profile Wall Profile








Hinge Side
(Shorter Glass Profile)



02

04

Strike-Side
(Longer Glass Profile)

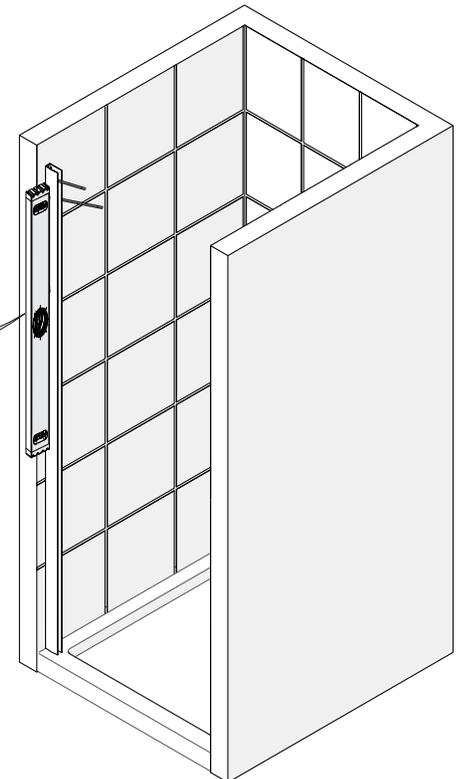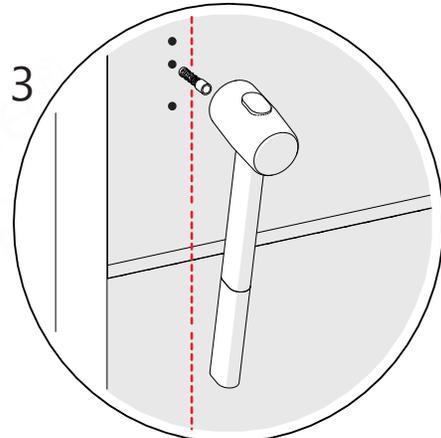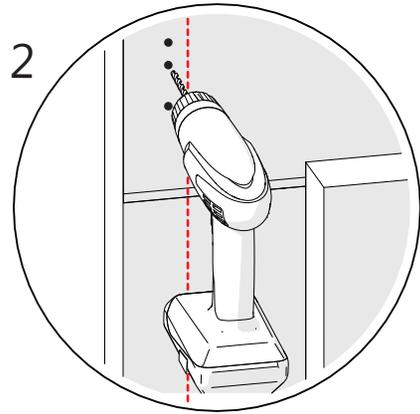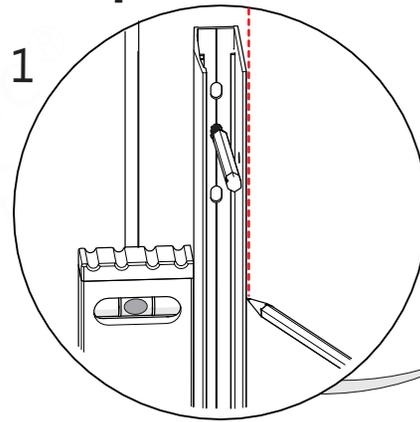


Left-handed installation shown

NOTE

- **If a stud is present behind the wall:** drill a $\text{Ø}3/16''$ (4mm) hole up to the stud, drill an $\text{Ø}1/8''$ (3mm) pilot hole and use the **Large Truss Head Screw ST4.2 x 40 (#16)**
- OR
- **If no stud is present behind the wall:** drill a $\text{Ø}5/16''$ (7mm) hole and insert the **Wall Anchors (#12)** and use the **Large Truss Head Screw ST4.2 x 40 (#16)**

Parts Needed

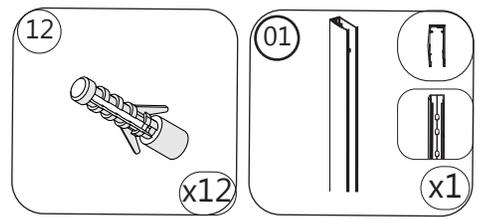

Tools Needed





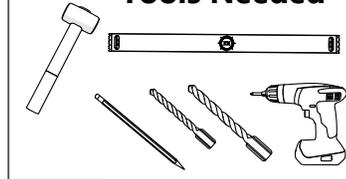


Fig 1

2

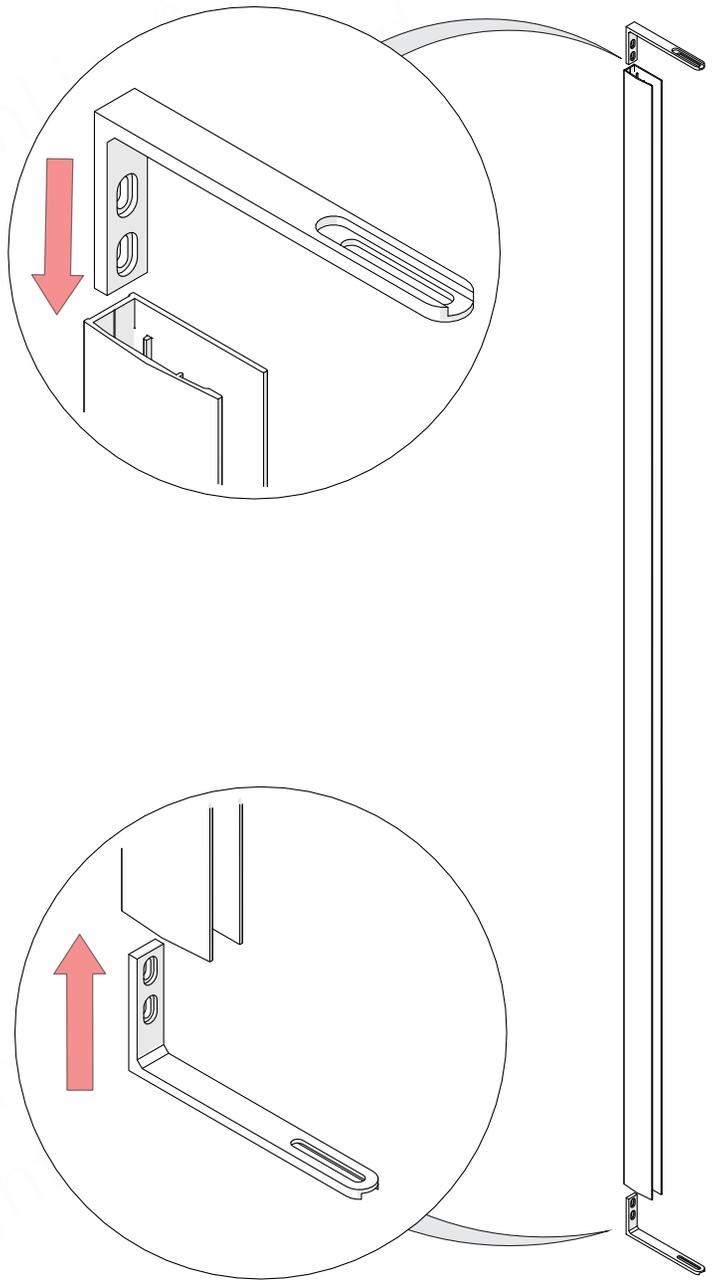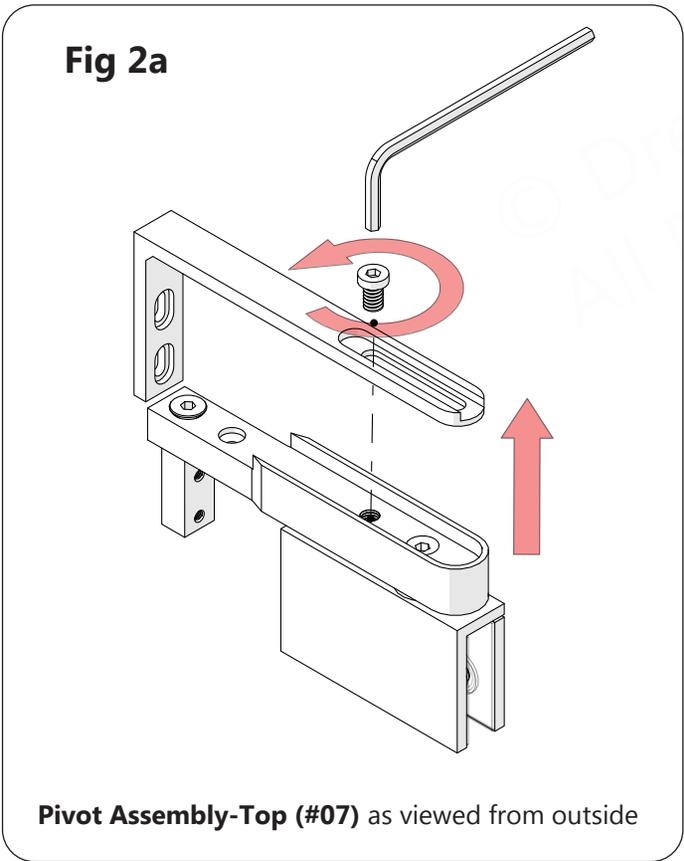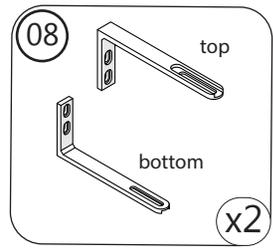


Parts Needed

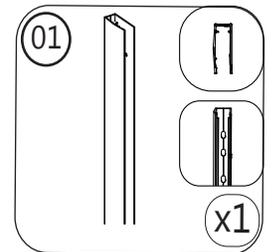




Tools Needed



3

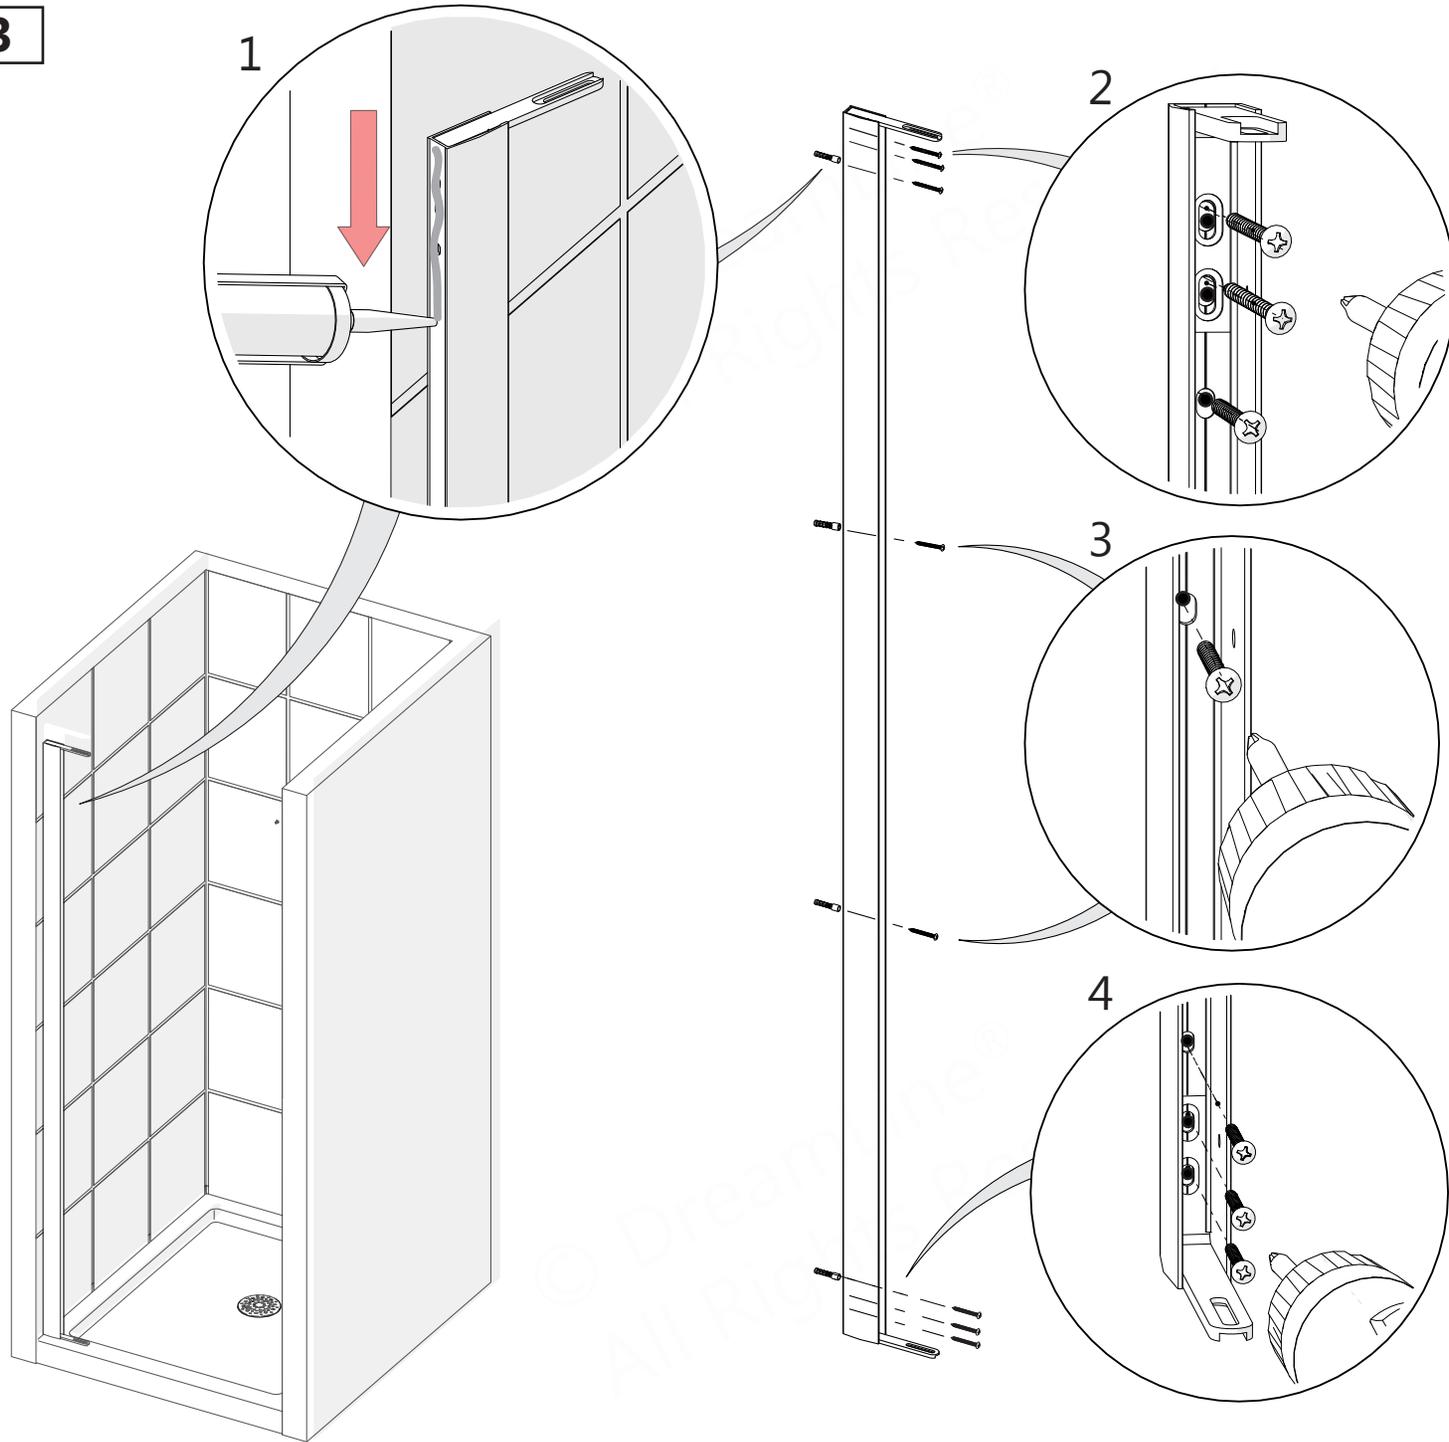

Parts Needed

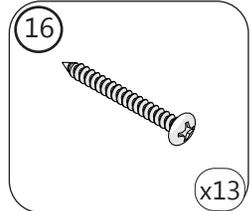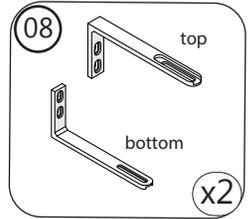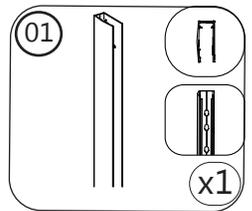


Tools Needed



Fig 3

4

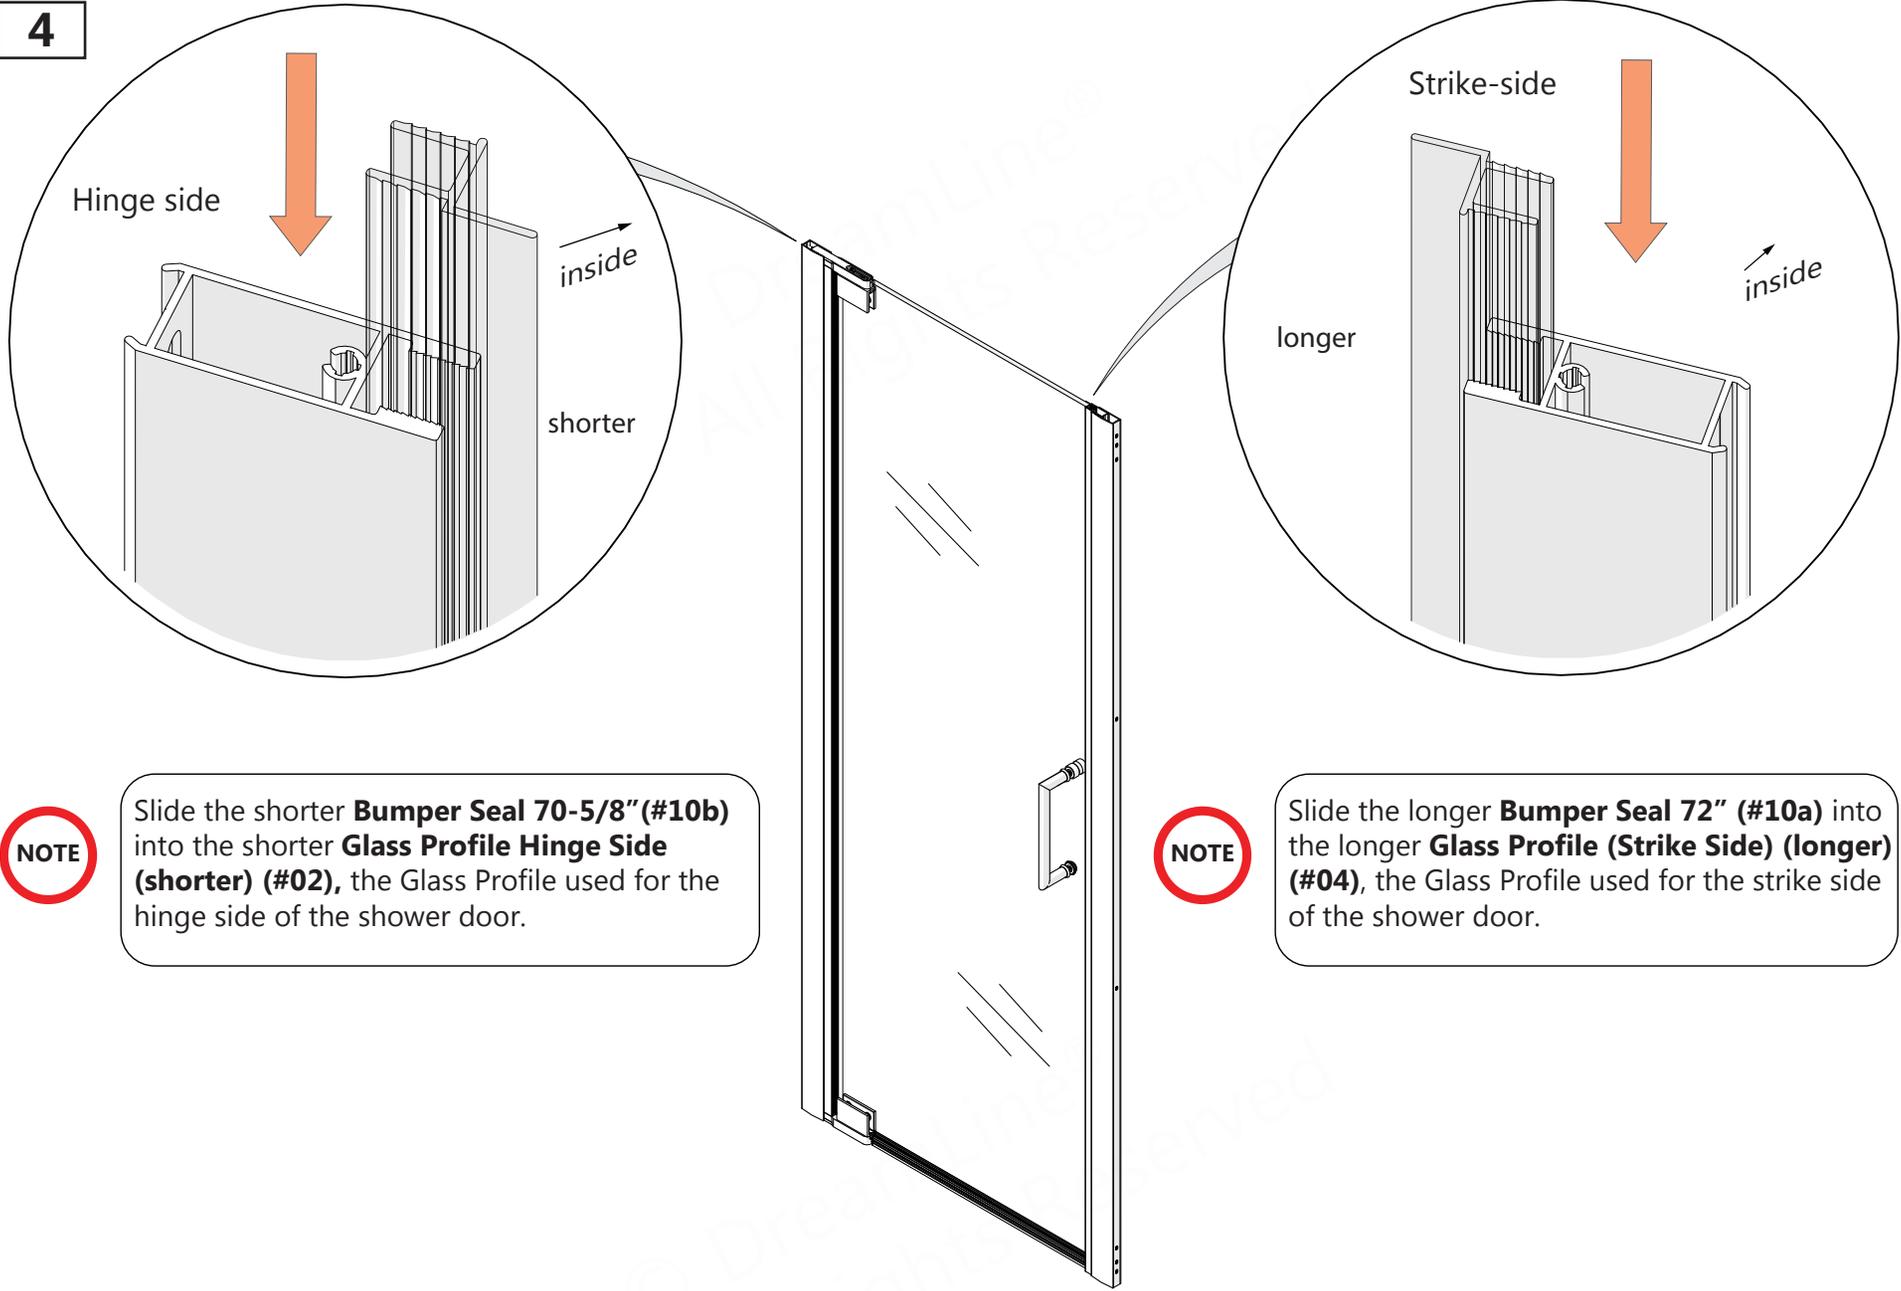

NOTE

Slide the shorter **Bumper Seal 70-5/8" (#10b)** into the shorter **Glass Profile Hinge Side (shorter) (#02)**, the Glass Profile used for the hinge side of the shower door.


NOTE

Slide the longer **Bumper Seal 72" (#10a)** into the longer **Glass Profile (Strike Side) (longer) (#04)**, the Glass Profile used for the strike side of the shower door.

Fig 4

left-swing door installation shown

5

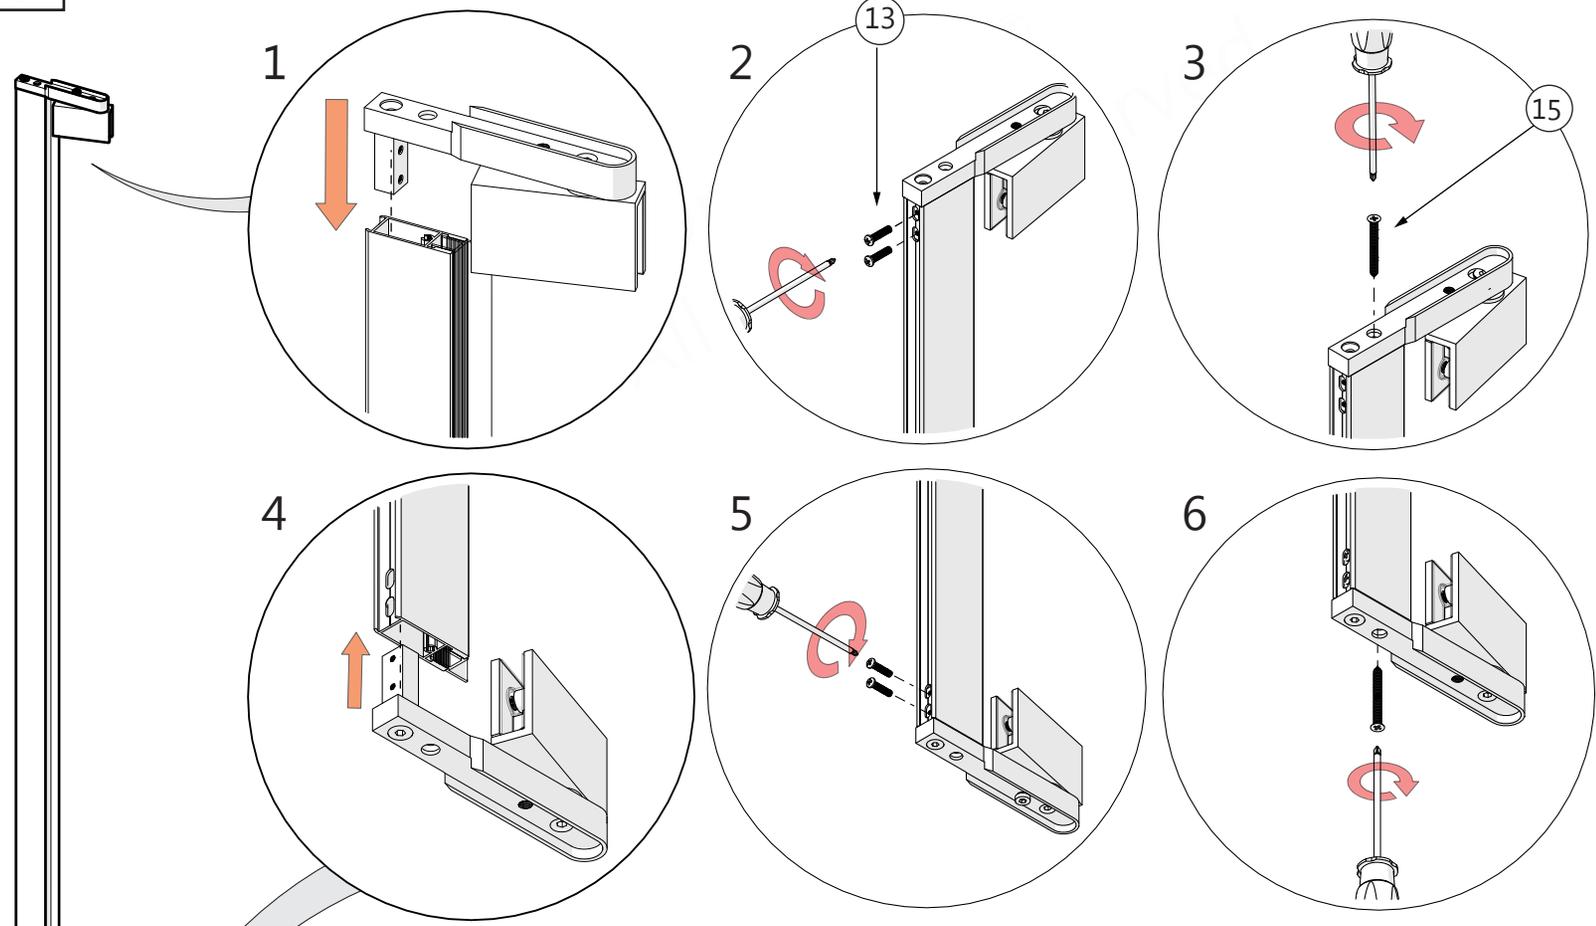

*left-swing door installation shown





NOTE

Fig 5
Attach the Pivot Assemblies (#07) to the **Glass Profile Hinge Side (Shorter) (#02)** as shown in **Fig 5**. The back of the **Pivot Assembly** and the bolts **face the inside** of the shower.


NOTE

The **Glass Profile Hinge Side (#02)** is the shorter of the two Glass Profiles.

Parts Needed

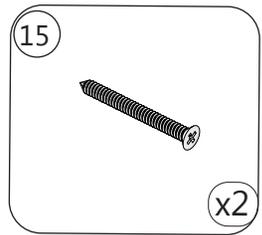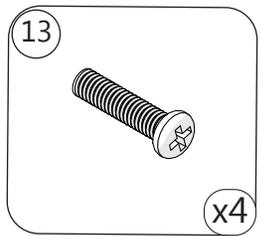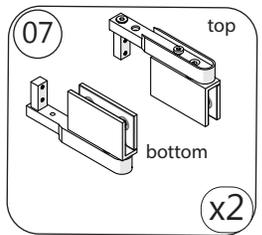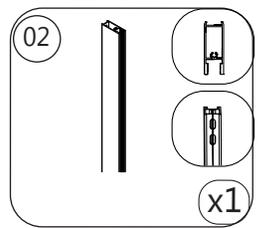


Tools Needed

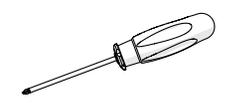

6




Protect the edges of the door glass from making contact with the walls and threshold during installation and adjustment.


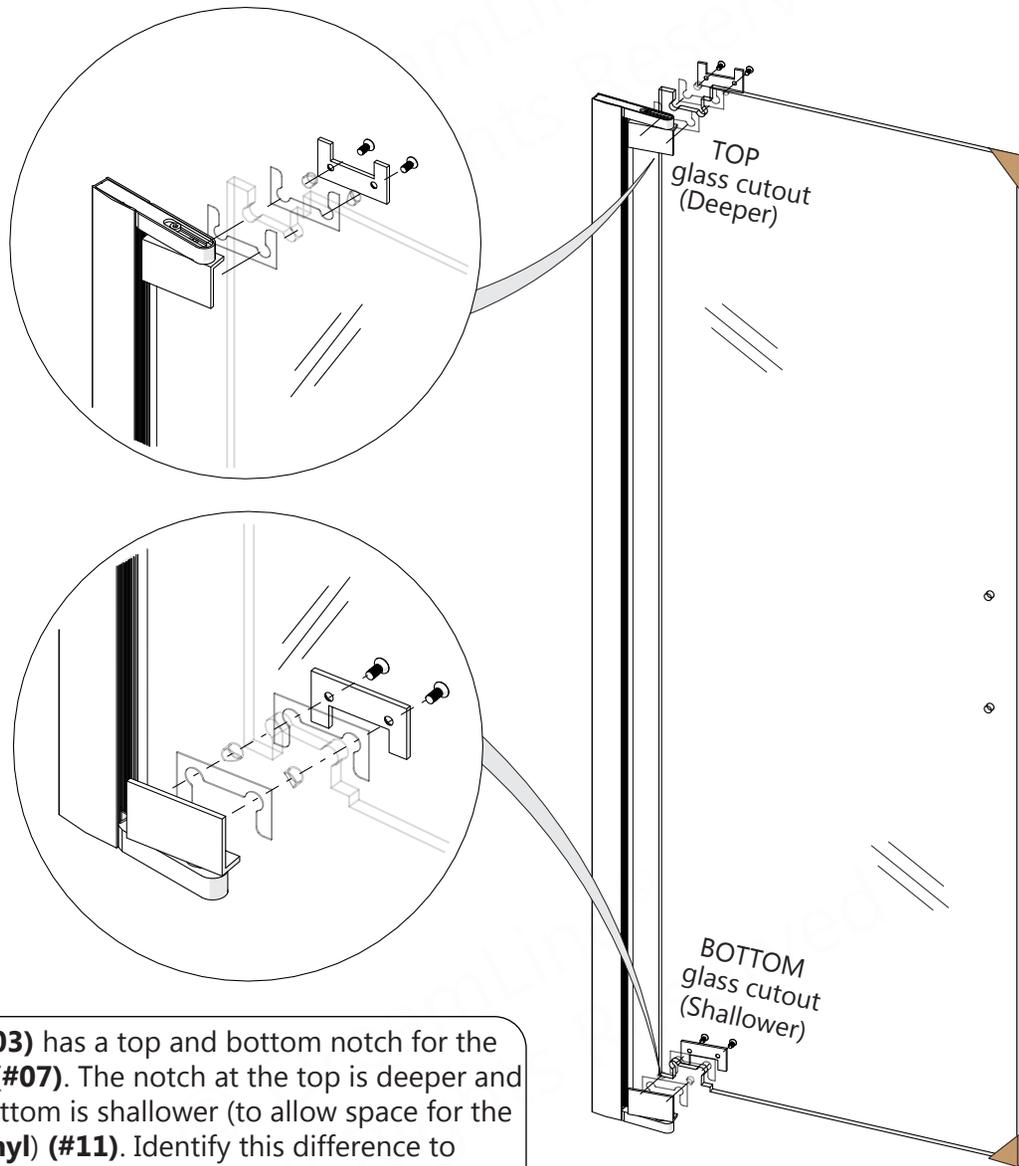


Leave the corner protectors on the glass until it is necessary to remove them.

Do Not install the handle yet.



Parts Needed



Tools Needed



The **Door Glass (#03)** has a top and bottom notch for the **Pivot Assemblies (#07)**. The notch at the top is deeper and the notch at the bottom is shallower (to allow space for the **Bottom Sweep Vinyl (#11)**). Identify this difference to prevent installing the Door Glass upside-down.




Use caution when handling the **Door Glass (#03)**. **DO NOT** lift the Door Glass with the **Handle (#06)**.



Fig 6

left-swing door installation shown

7

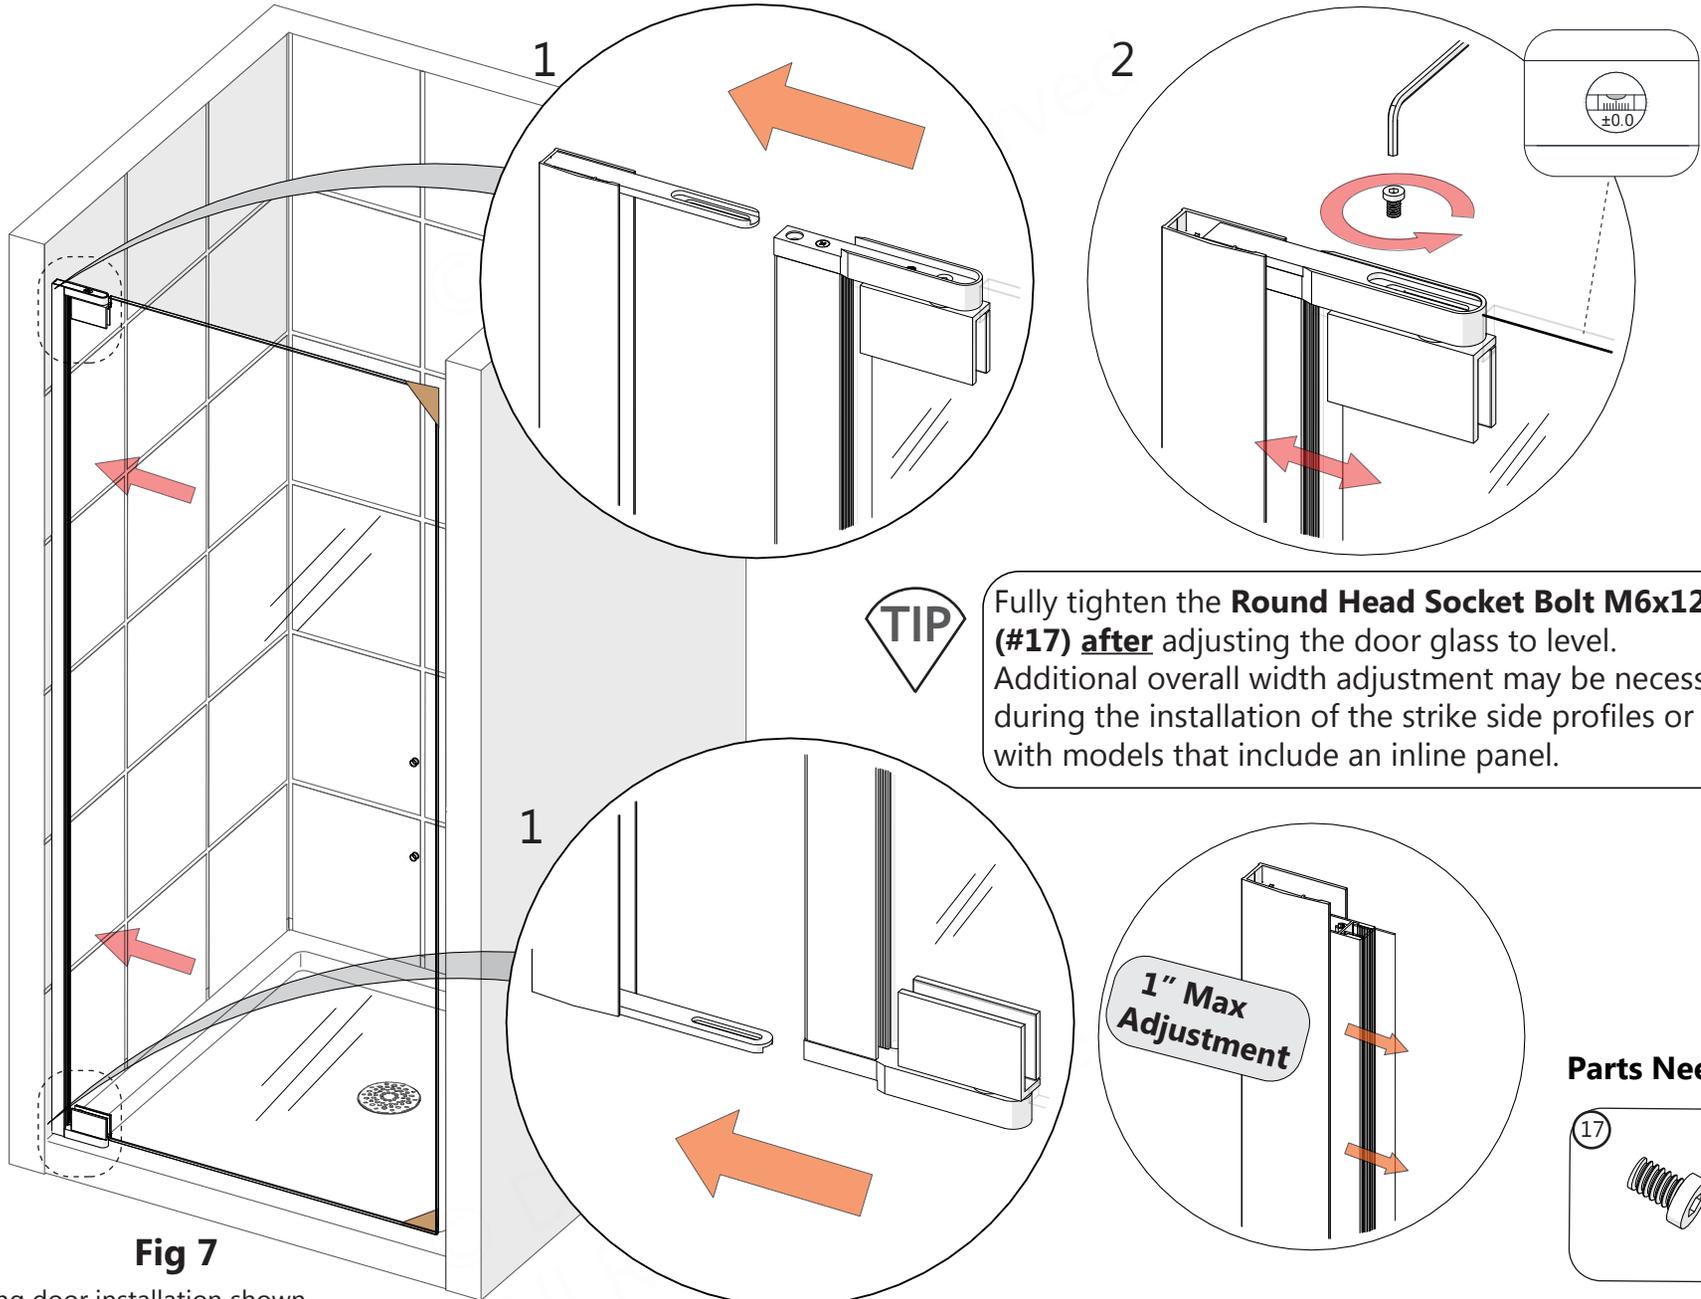

TIP

Fully tighten the **Round Head Socket Bolt M6x12 (#17)** after adjusting the door glass to level. Additional overall width adjustment may be necessary during the installation of the strike side profiles or with models that include an inline panel.


Fig 7

left-swing door installation shown



Each two-piece wall profile system (consisting of the **Glass Profiles (#02/04)** and **Wall Profiles (#01/05)**) will allow for 1" of adjustment for overall width or an out-of-plumb condition within the model size.

Parts Needed



Tools Needed



8

Handle Assembly Installation: Elegance


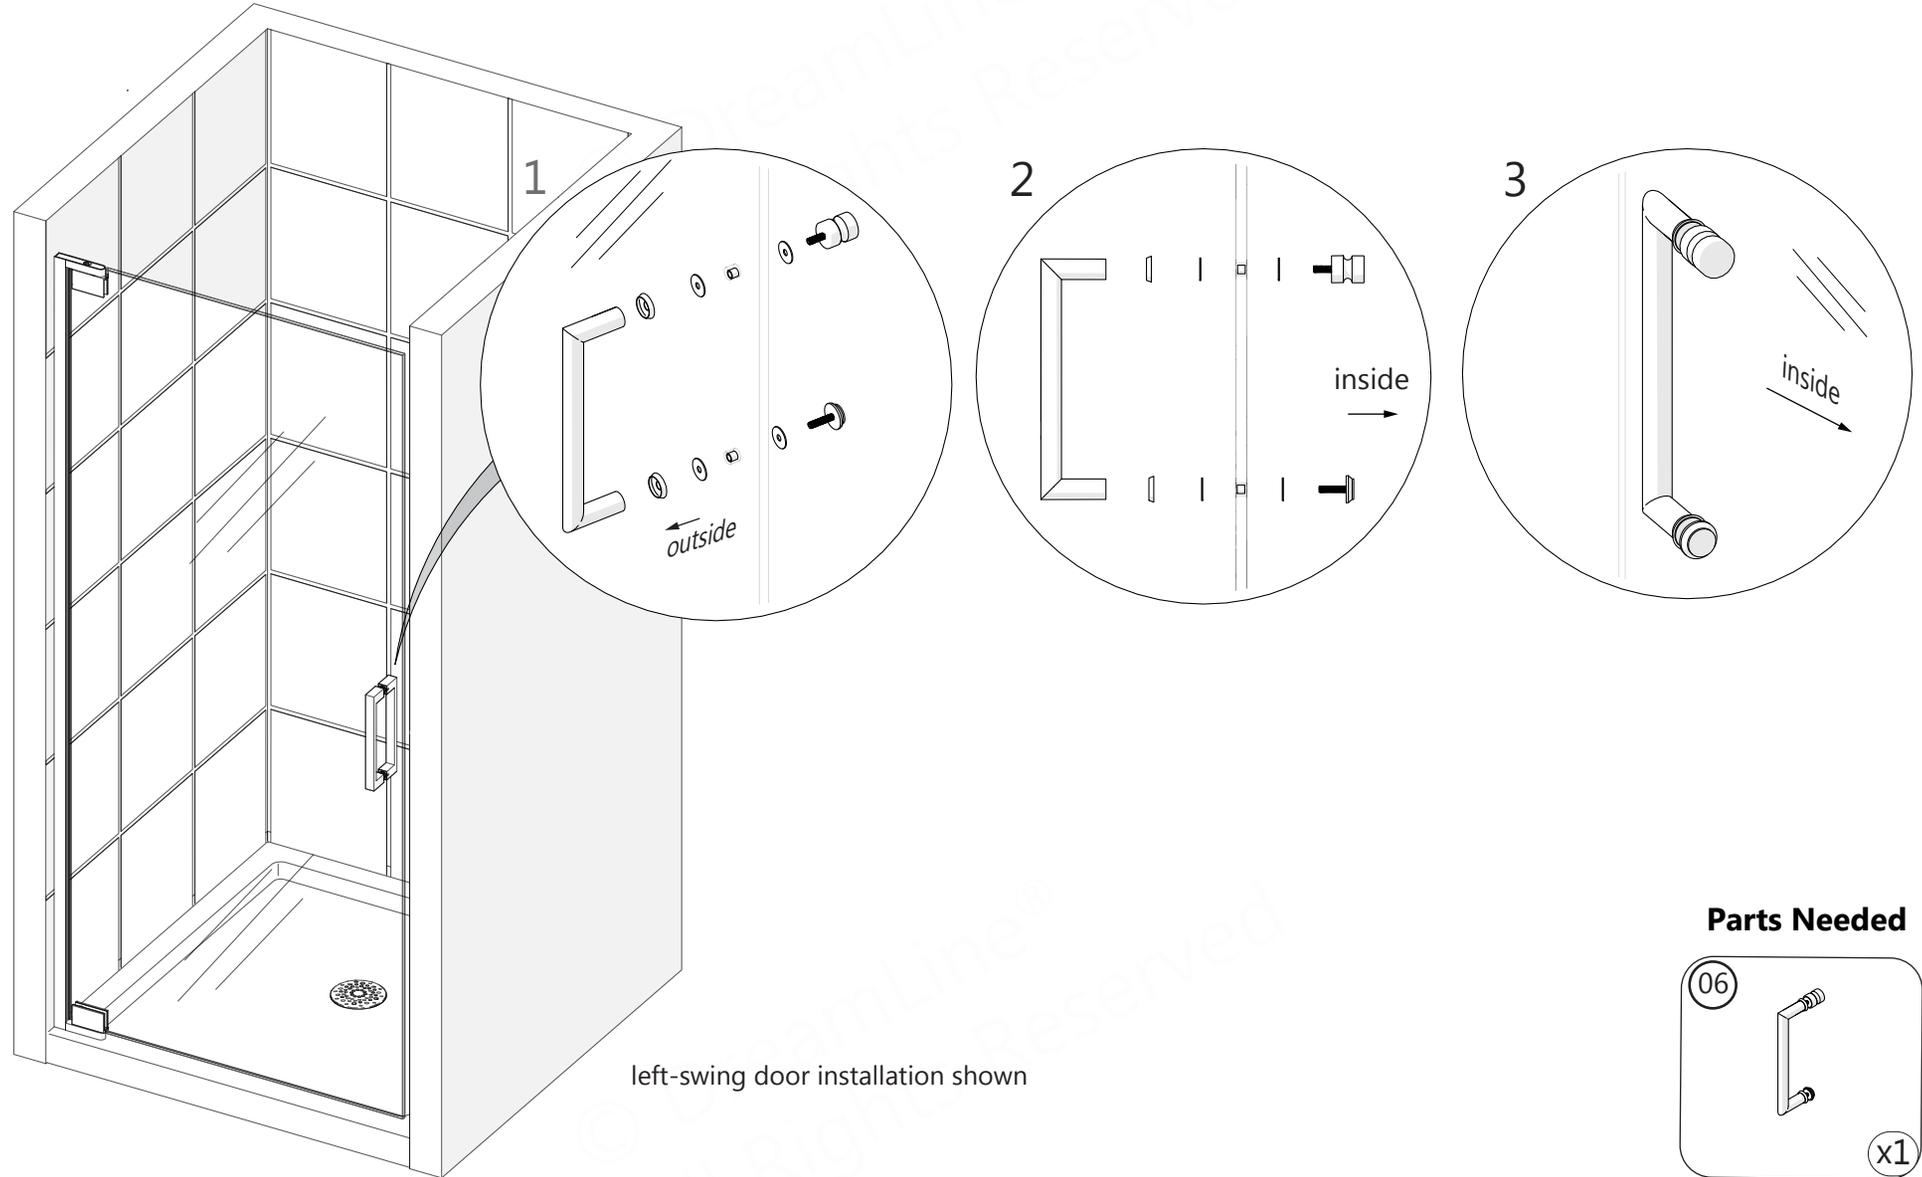


Fig 8



Tighten both knobs to the **Handle (#06)** to ensure the handle is secured to the **Door Glass (#03)**. (see Fig 7.3)

Parts Needed

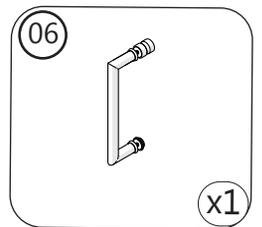

Tools Needed



8a

Handle Assembly Installation: Elegance-LS


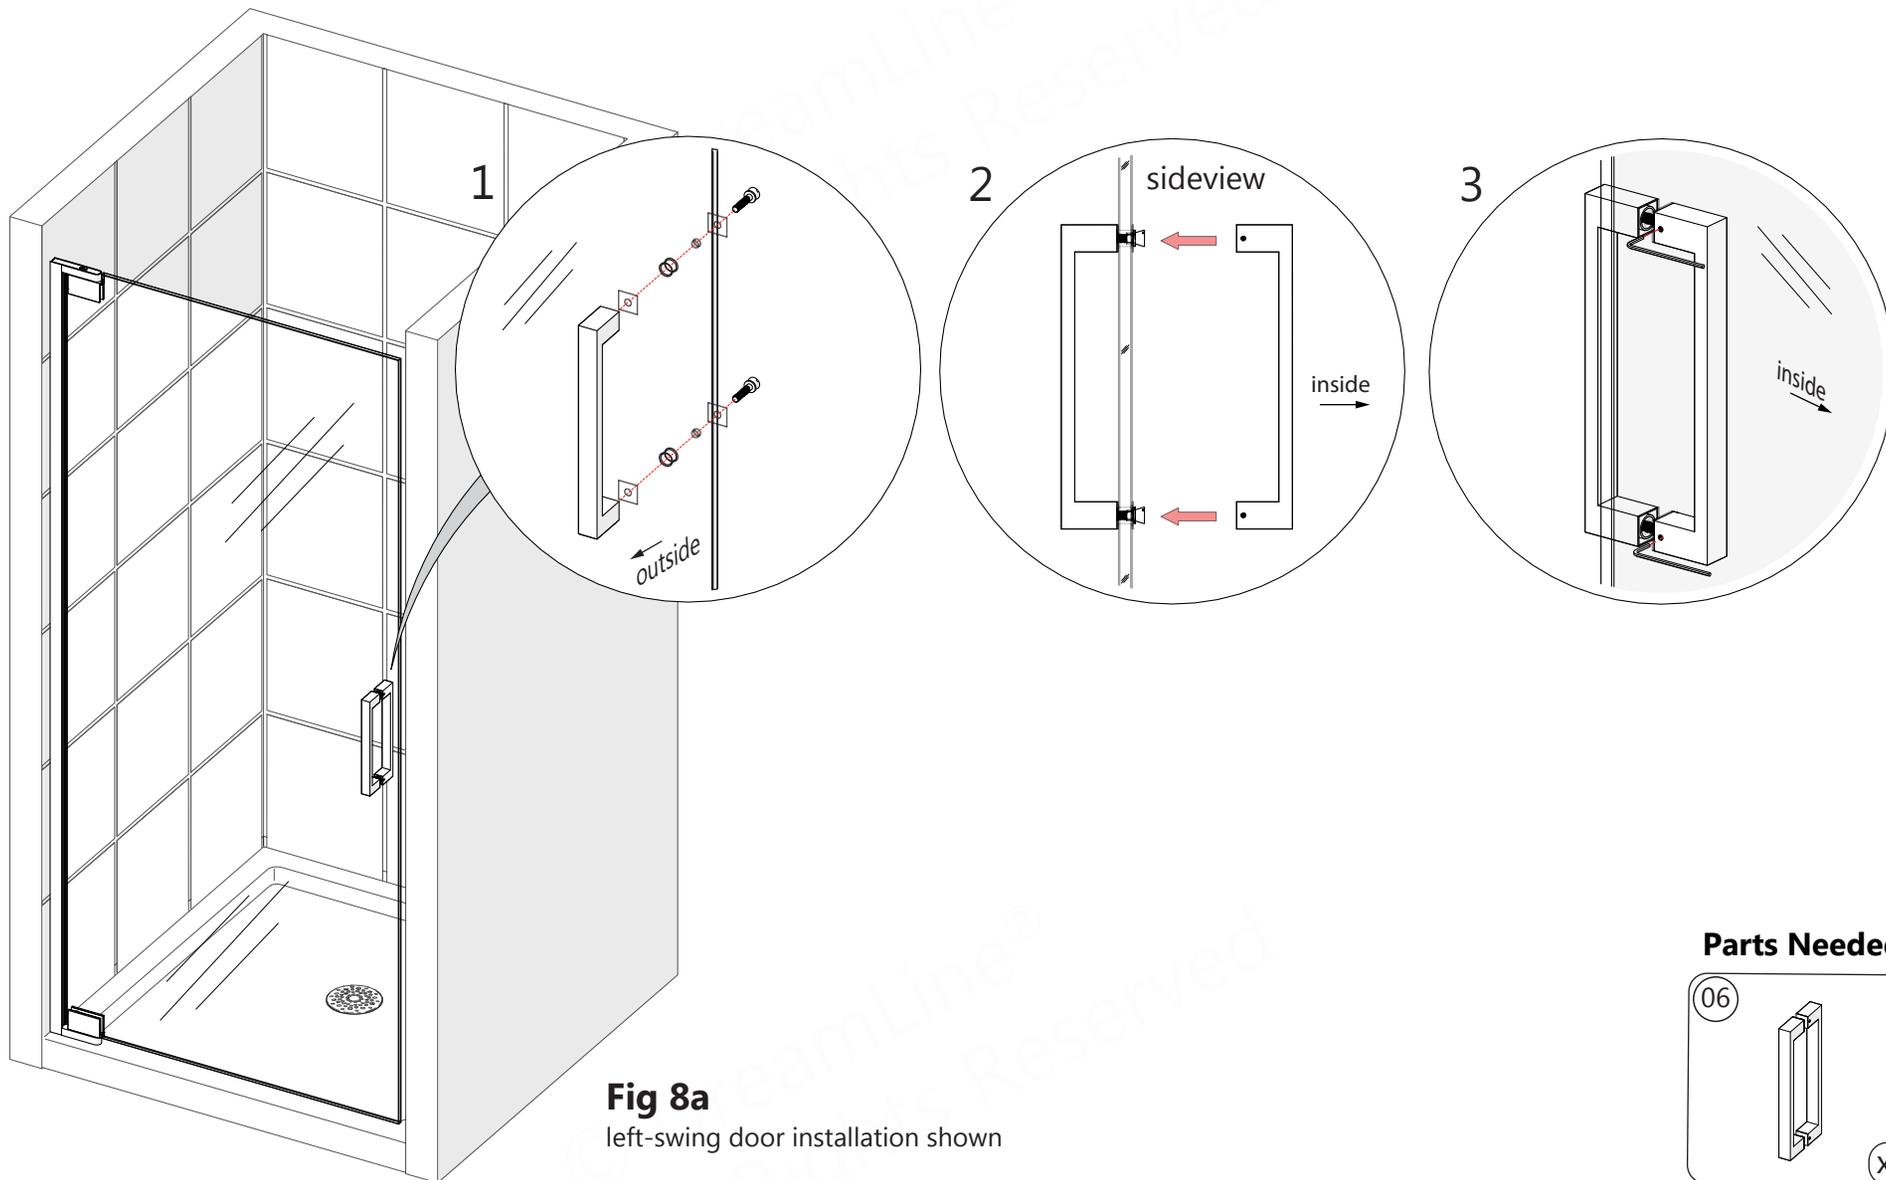


Fig 8a
left-swing door installation shown



Tighten all four **Handle (#06 LS)** set screws to ensure the handle is secured to the **Door Glass (#03)**. (see Fig 7.3)

Parts Needed



Tools Needed



9

NOTE

Sealing the hole in the bottom **Pivot Assembly (#7)** is important to prevent water leakage. Screwing the bottom **Pivot Assembly (#7)** to the threshold is optional. (See page 27 for details)





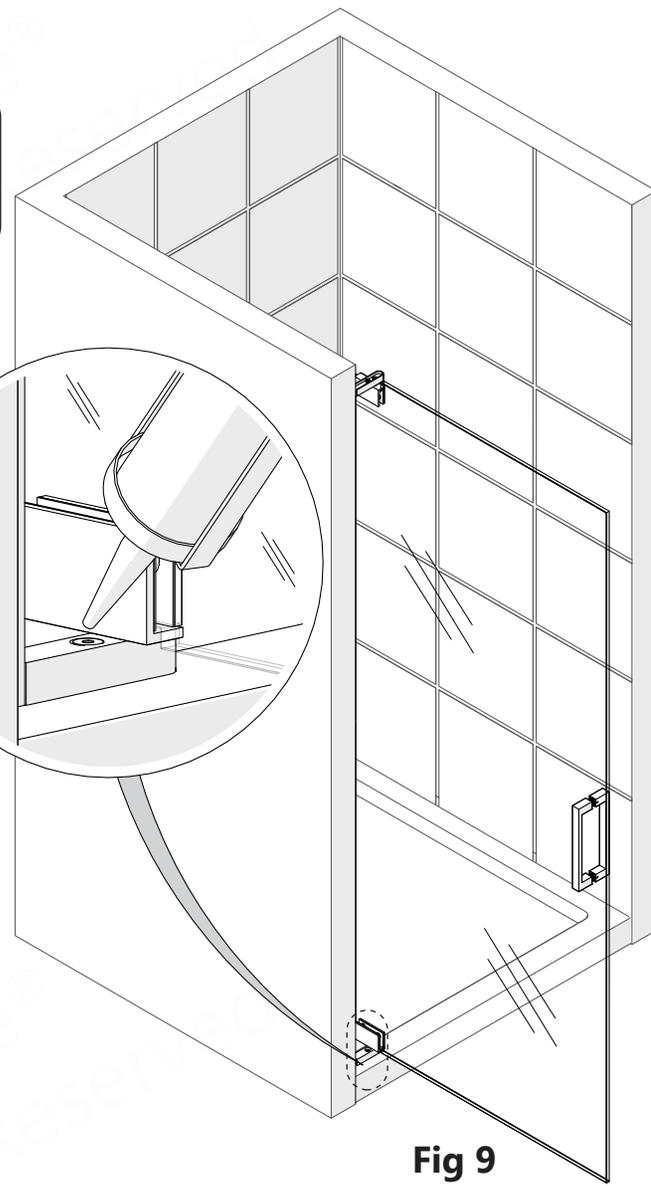



Fig 9

left-swing door installation shown

Parts Needed

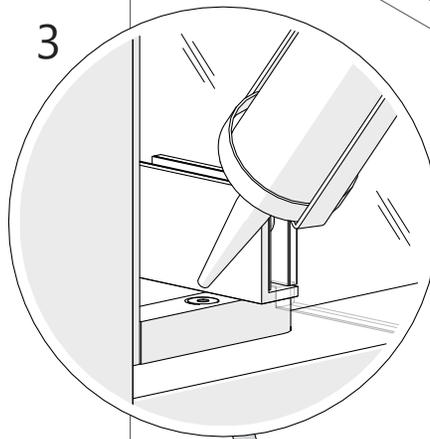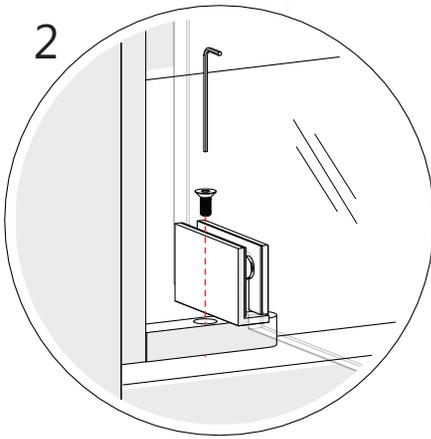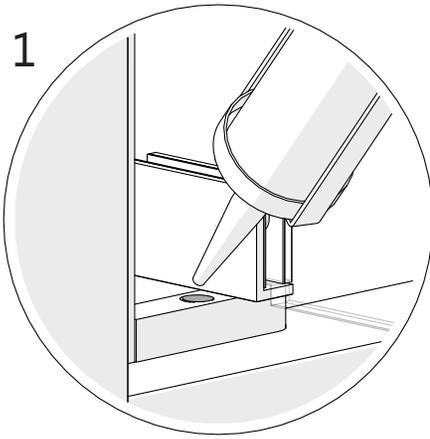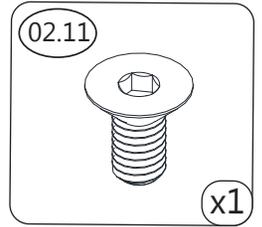

Tools Needed



***Any width and/or out-of-plumb adjustments using the adjustable wall profile system must be made prior to screwing the Pivot Assembly (#07) down into the threshold. See Page 27 for specific instructions.**



When installing the door along with an inline panel model, postpone this step until after aligning the panel glass.

10

Strike Profile Installation



If installing this door along with an inline panel, stop here and refer to the manual that came with the panel glass for further installation instructions. Otherwise, for a single door, continue with Step 10 below.

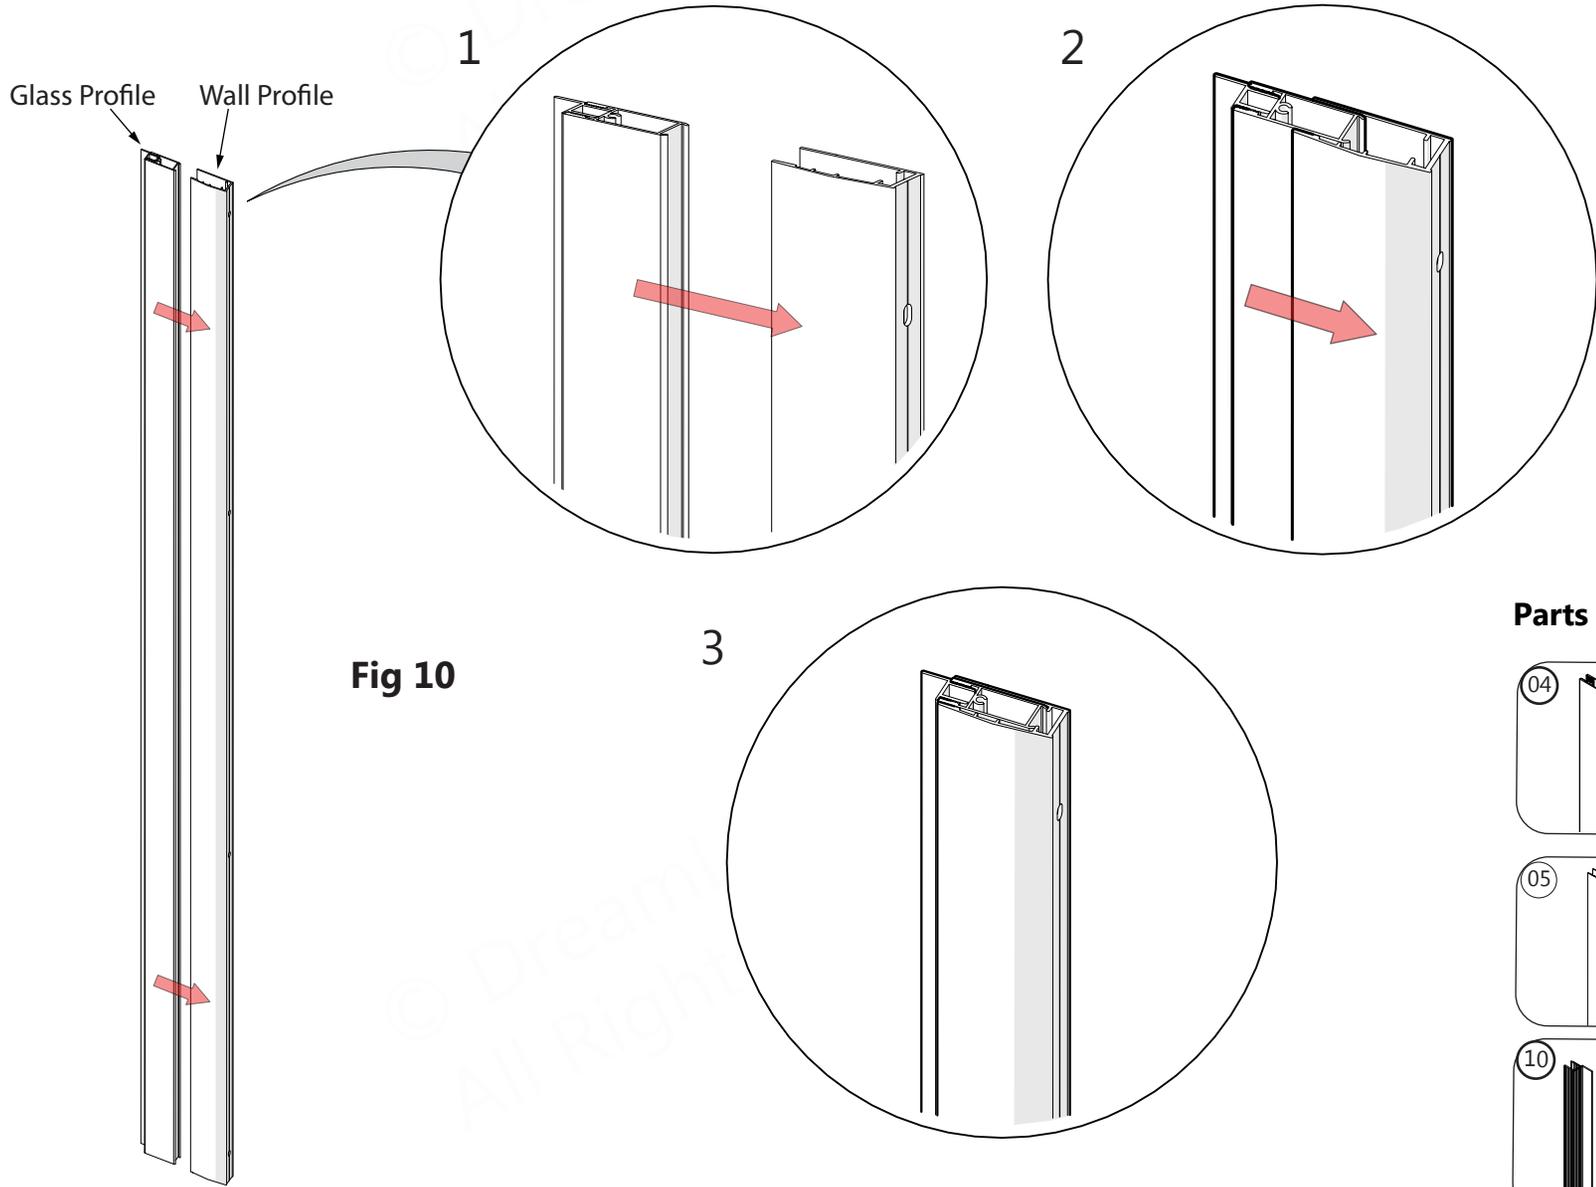


Fig 10

Parts Needed

- 04 x1
- 05 x1
- 10 x2

11

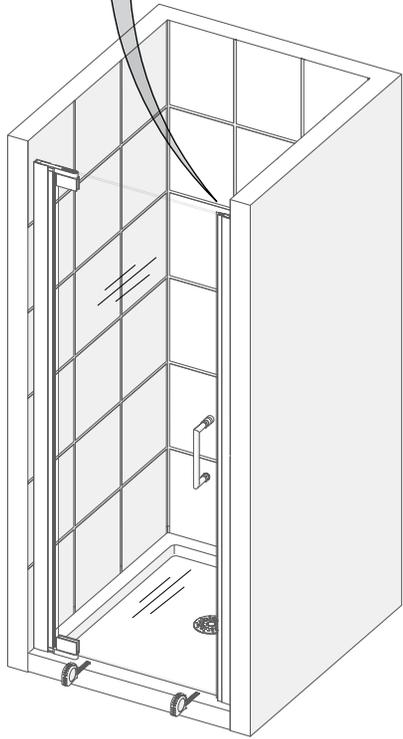
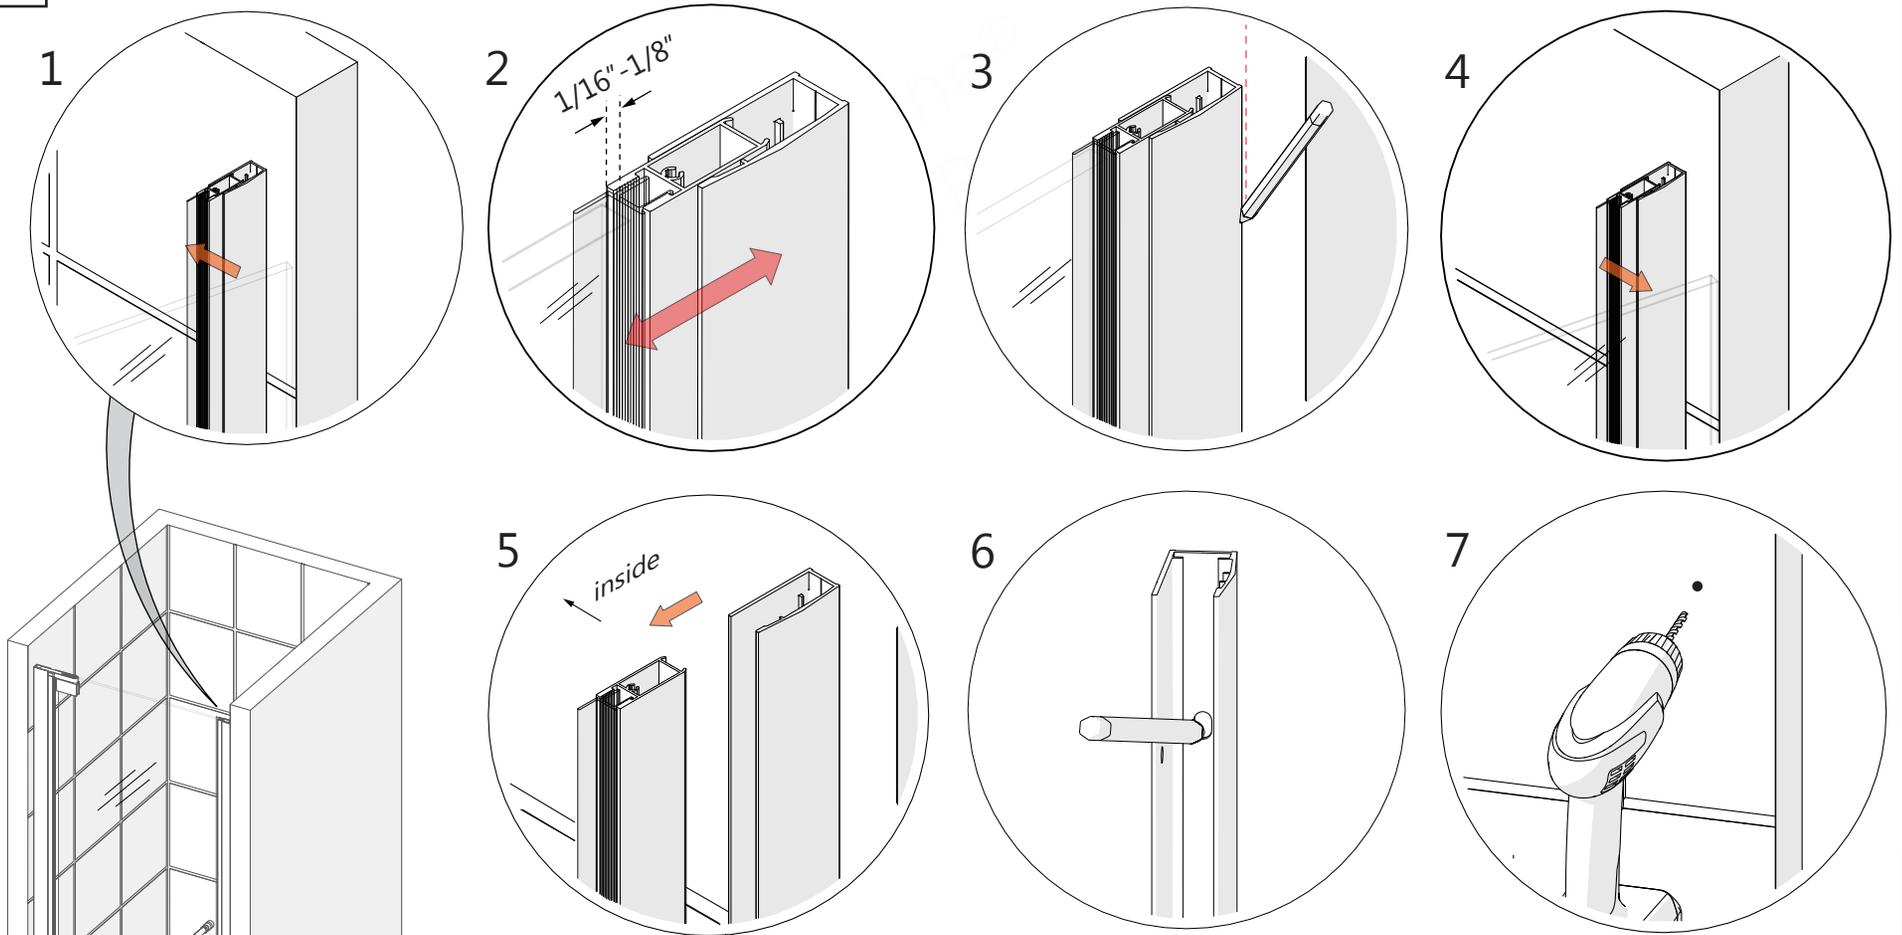


Fig 11

left-swing door installation shown

NOTE

Align the **Strike Profile (#05)** to the **Door Glass (#03)**. Create 1/16" to 1/8" space between the edge of the door glass and the strike vinyl by adjusting the glass profiles. Make sure the door glass makes full contact with the strike vinyl when the door is fully closed. (**Fig 11.1**)

NOTE

- **If a stud is present behind the wall:** drill a $\text{Ø}3/16"$ (4mm) hole up to the stud, drill an $\text{Ø}1/8"$ (3mm) pilot hole and use the **ST4.0 x 40mm Pan Head Screws (#08)**
- OR**
- **If no stud is present behind the wall:** drill a $\text{Ø}5/16"$ (7mm) hole and insert the **Wall Anchors (#10)** and use the **ST4.0 x 40mm Pan Head Screws (#08)**.

Tools Needed



12





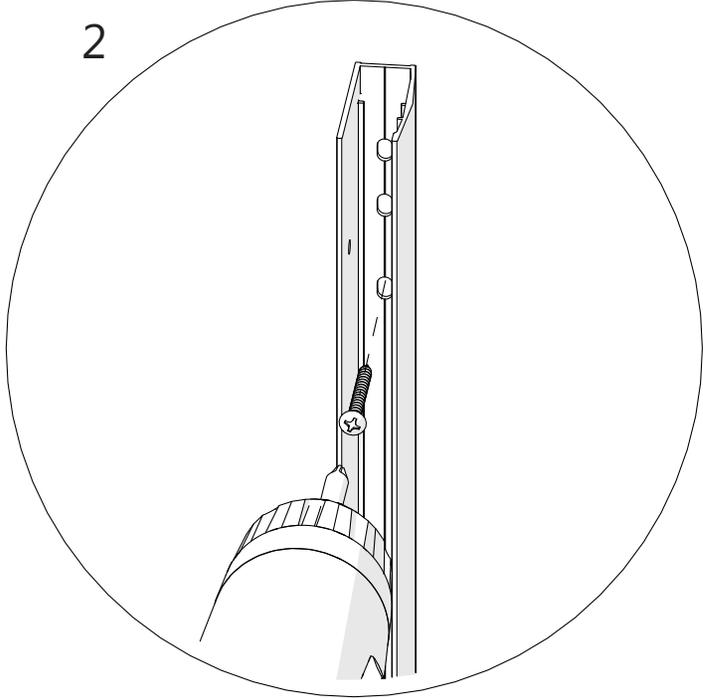


Fig 12





Parts Needed

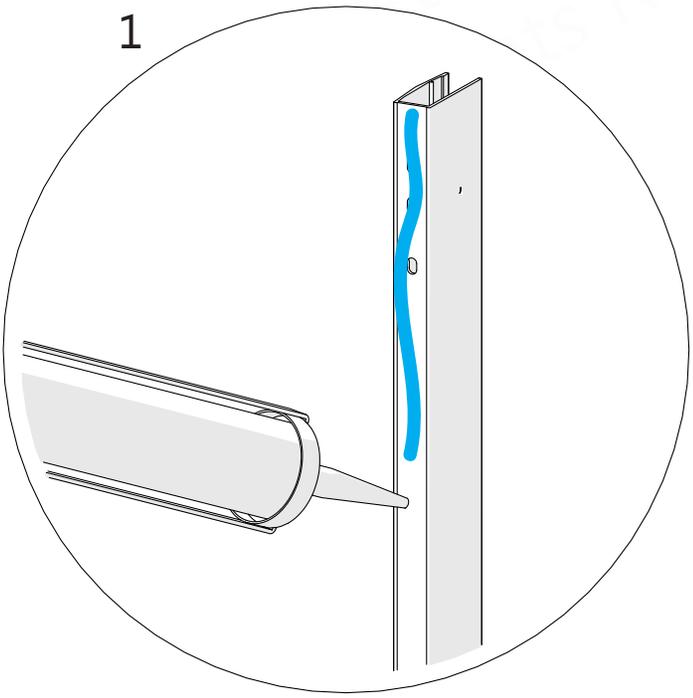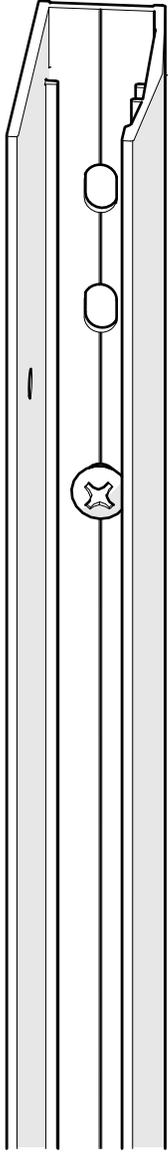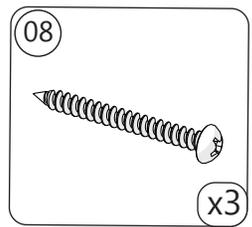

Tools Needed



13

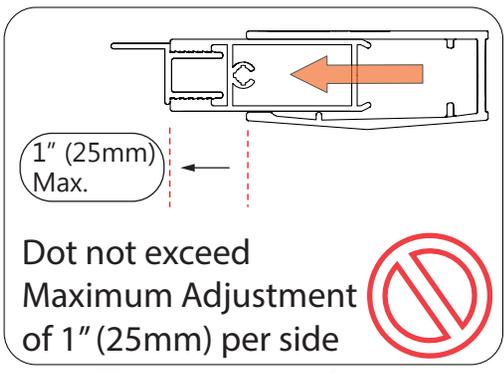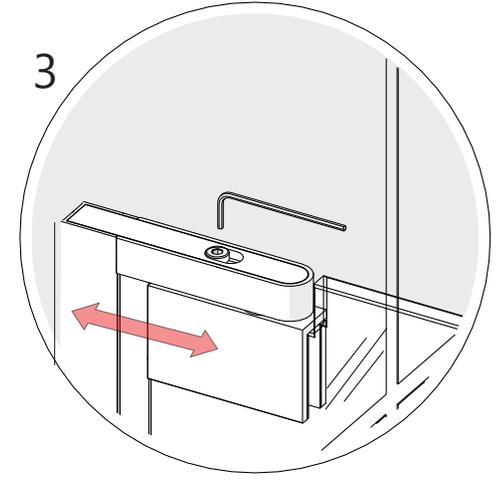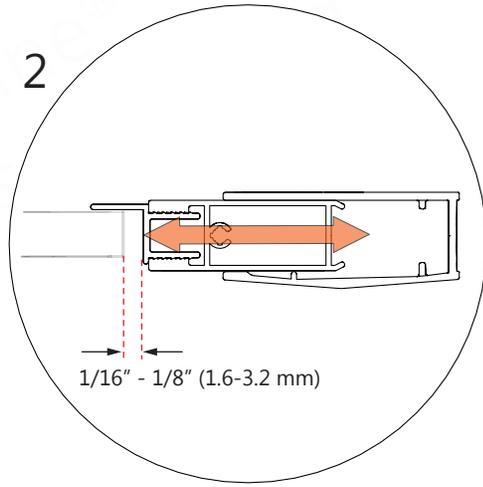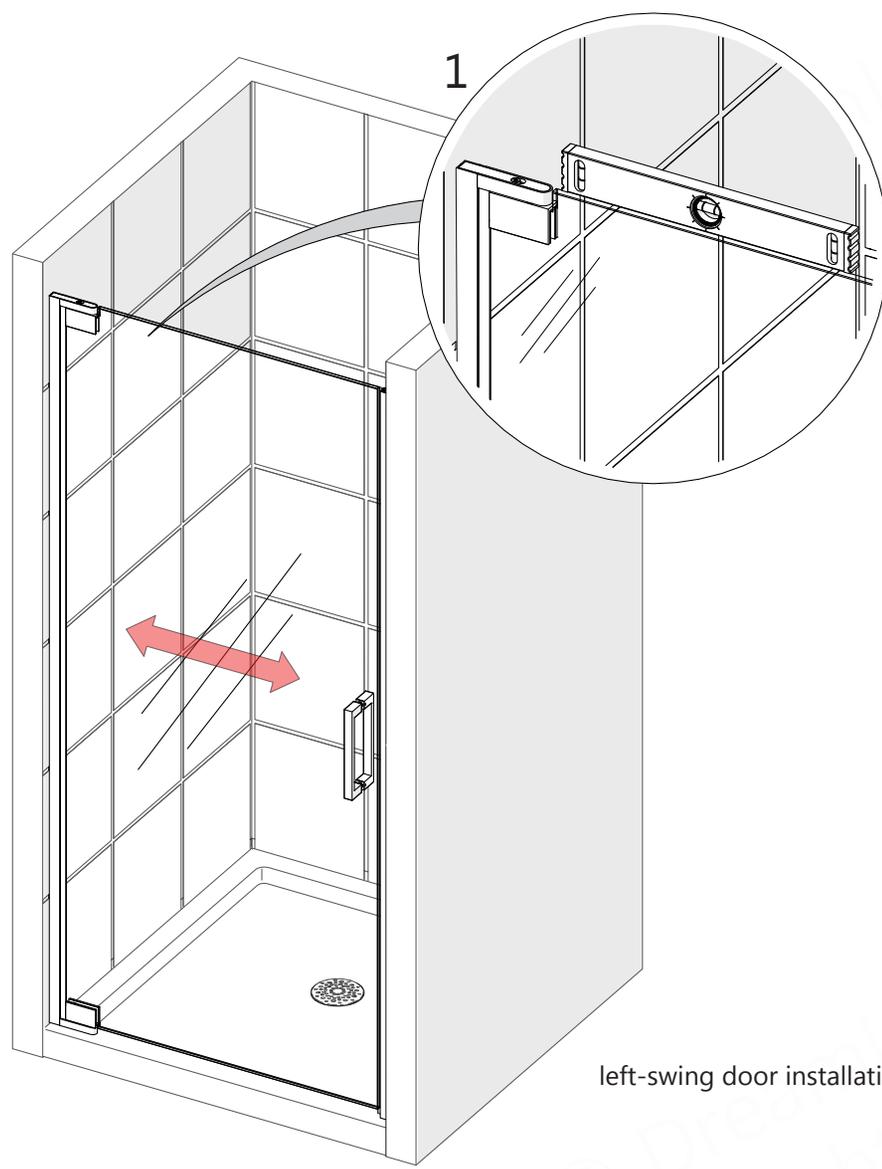


left-swing door installation shown

Fig 13




Use caution not to damage the edges of the door glass during adjustments.

Parts Needed

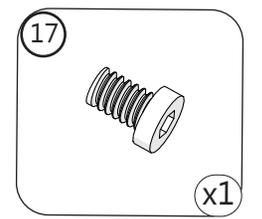

Tools Needed

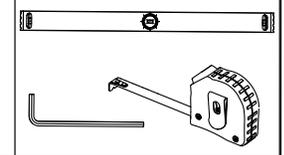

14

Decorative Cover Installation

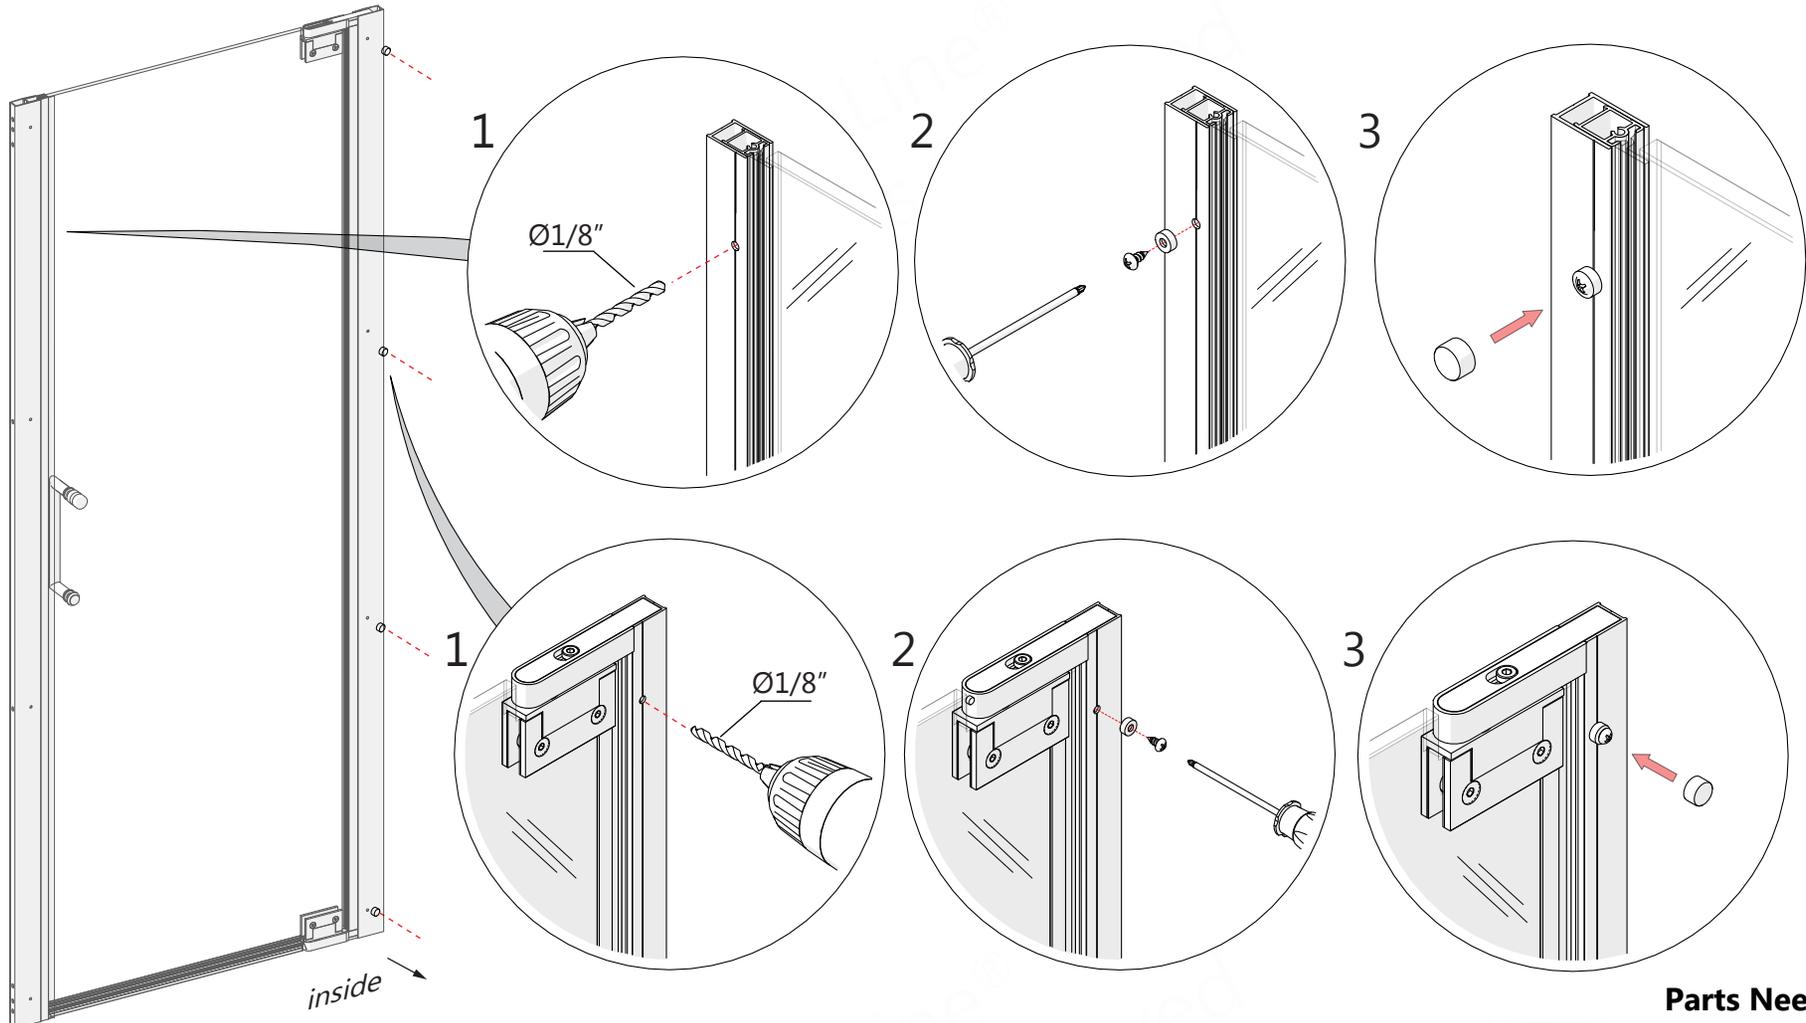


Fig 14



When installing this door along with an inline panel, postpone this step until overall width adjustments have been made.




Only drill through the first layer of the **Glass Profiles (#02/04)** using an **Ø1/8"** drill bit.




Turn to **Page 27** for instructions to screw the bottom **Pivot Assembly (#7)** to the threshold if desired. Otherwise, continue on to the next step.

Parts Needed

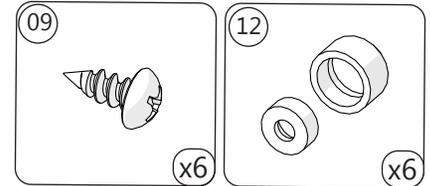

Tools Needed



left-swing door installation shown from the inside

15

Bottom Sweep Vinyl Installation

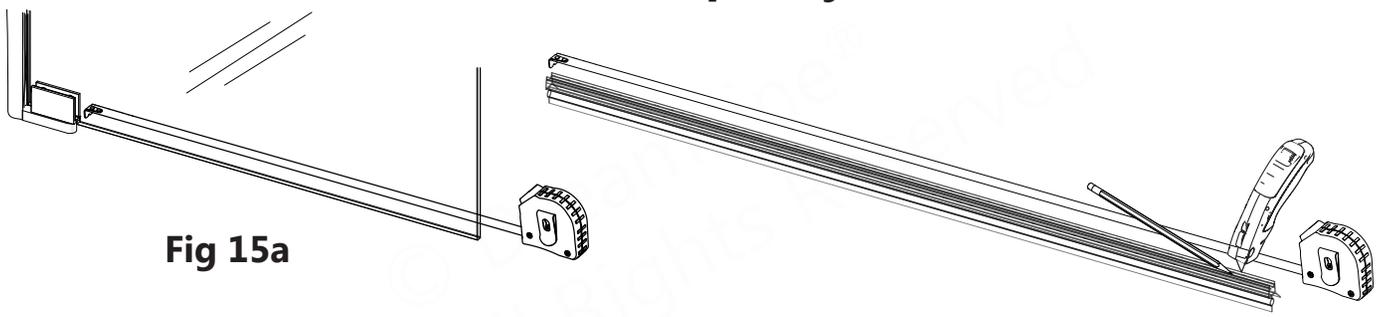


Fig 15a


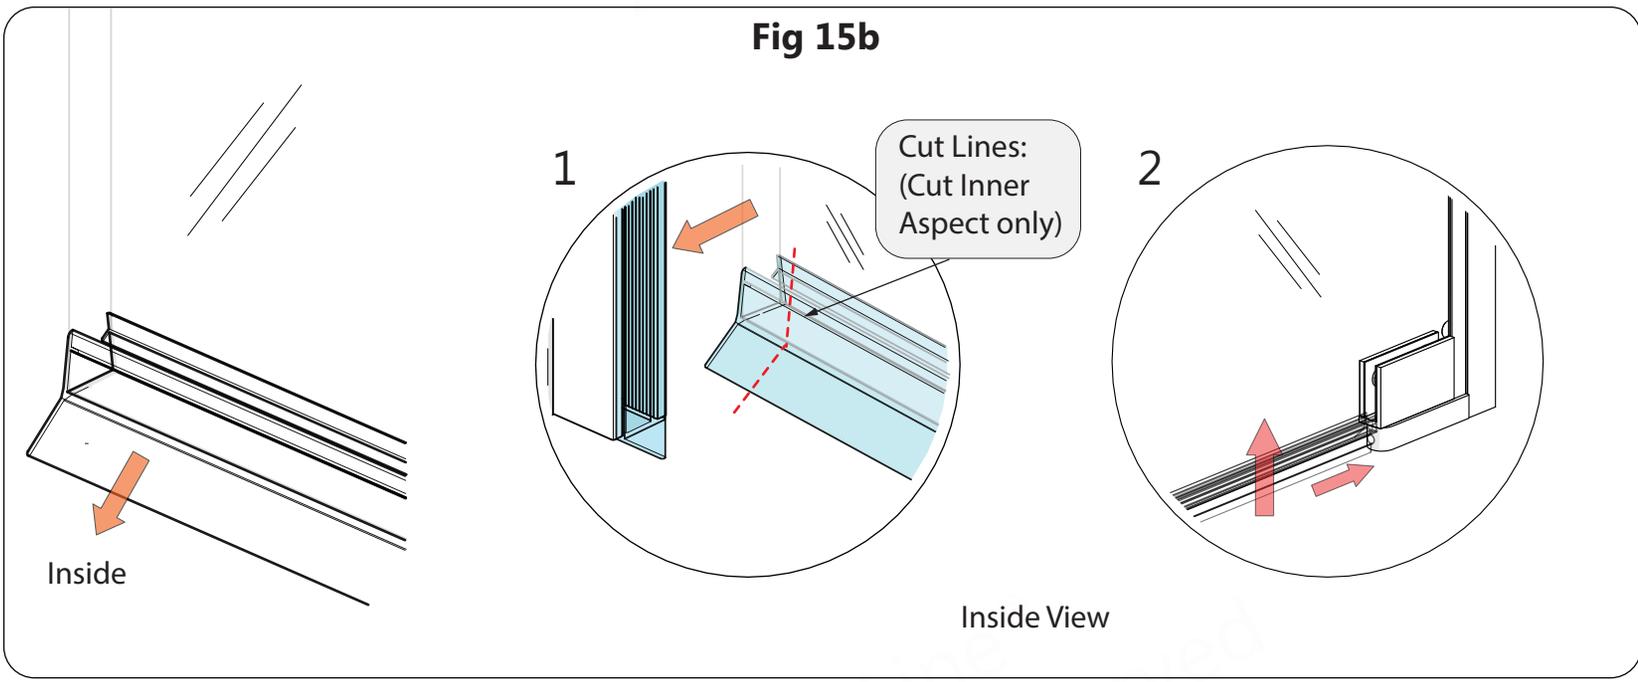


Fig 15b




Close the door, mark and notch the inner aspect only of the inner-side of the **Bottom Sweep (#11)** where it overlaps the **Snap-in Anti-Water Strip (#10)** when the door is in the closed position. **(Fig 15b.1)**

Parts Needed



Tools Needed



NOTE

The surfaces need to be clean and free of debris before applying silicone.

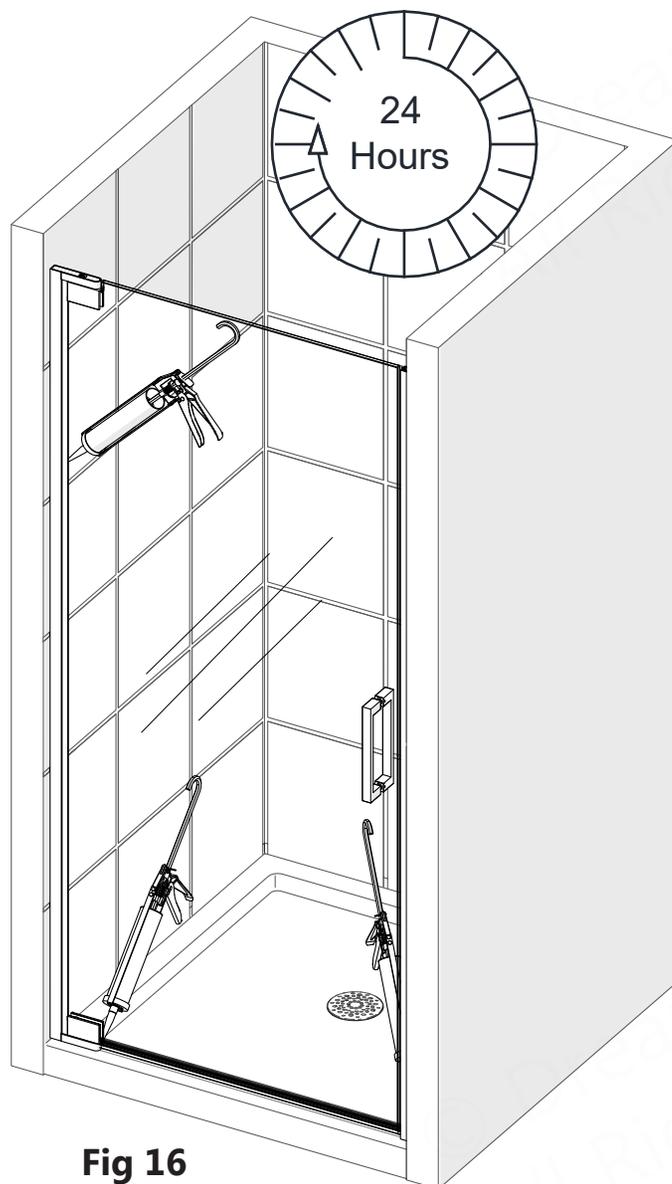


Fig 16



This completes the single door installation.

For the installation of a model that includes inline panel glass:


-Complete the installation steps using the manual that is packaged with the inline panel glass.

Note that the strike side **Glass Profile (longer) (#04)** and **Wall Profile Strike Side (longer) (#05)** will not be used with the inline panel installation.




Allow 24 hours for the silicone caulk to cure before using the shower.

Tools Needed



17

Securing the Bottom Pivot Assembly To The Threshold

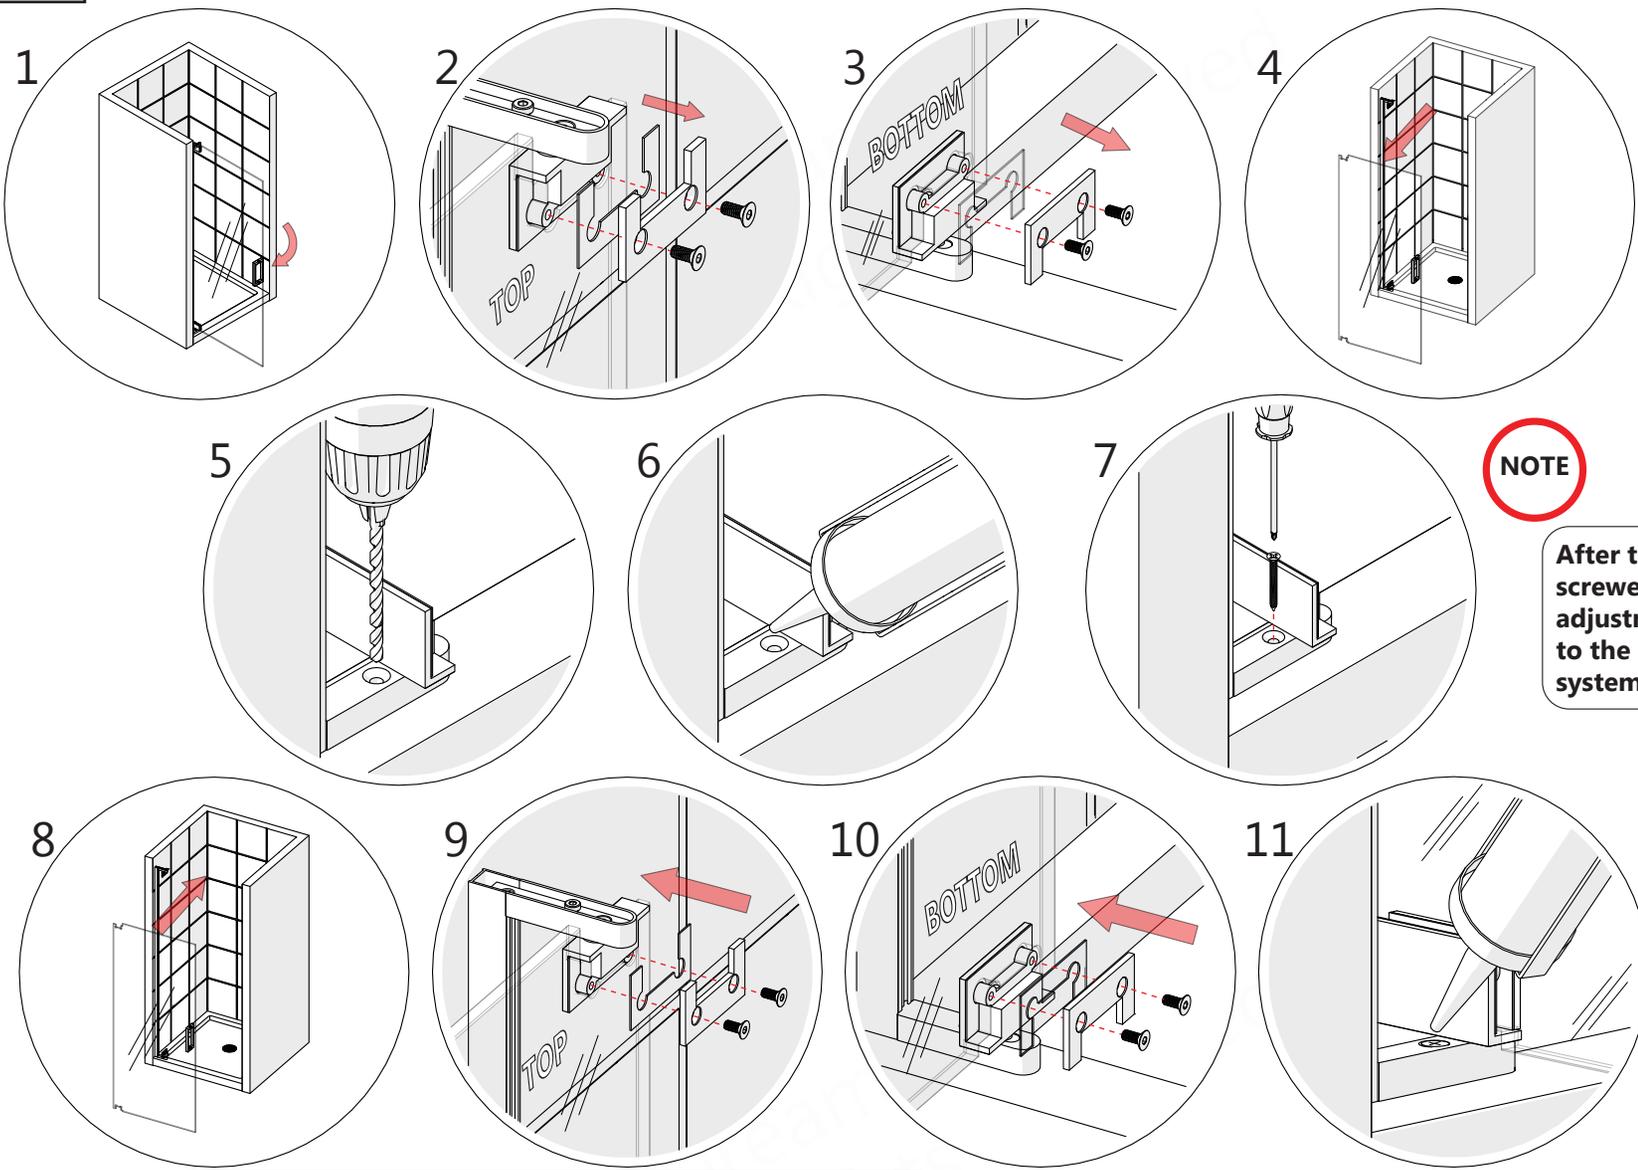

NOTE
 After the bottom pivot is screwed to the threshold, adjustment will be limited to the strike side wall profile system.

NOTE

▪ For installation into an **Acrylic Threshold**:
 drill a **Ø1/8" (3mm)** hole and use the **ST4.2×40mm Countersunk Screw (#01.9 / 02.9)**
OR
 ▪ For installation into a **Tile Threshold**:
 drill a **Ø3/16" (4mm)** hole up to the stud, drill an **Ø1/8" (3mm)** pilot hole and use the **ST4.2×40mm Countersunk Screw (#01.9 / 02.9)**.




Use a longer drill bit to drill through the hole in the Pivot Assembly. see Fig 5


NOTE

Use caution not to scratch the hinge surface.

Parts Needed

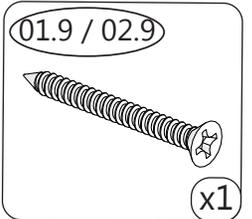

Tools Needed

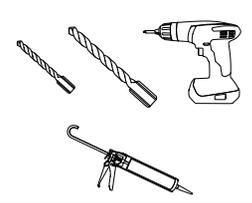

Product Maintenance

BASES and BACKWALLS: To ensure long lasting life for your acrylic back walls: wipe them off after each use with a soft cloth. To clean the acrylic back walls use non-abrasive sprays or cream based cleaners. Avoid the use of aerosol spray cleaners. Never use abrasive cleansers, metal brushes or scrapers that could permanently scratch or dull the surface.

GLASS: To ensure long lasting life for your glass shower products: wipe them off after each use with a soft cloth. Rinse and wipe off the glass using either a soft cloth or a squeegee to prevent soap buildup and water spots (Hard water can etch the surface of the glass over time if left to dry). To prevent scratching the surface: never use abrasive cleaners or cleaning products that contain scouring agents. Never use bristle brushes or abrasive sponges that may scratch the surface of the glass.

HARDWARE: To ensure a long lasting finish: wipe off all metal parts after each use with a soft cloth. Do not use abrasive cleaners or cleaning products containing ammonia, bleach or acid. If accidentally used, rinse the surface as soon as possible to prevent damage to the finish (peeling or corrosion). After cleaning the polished finishes, rinse thoroughly and wipe dry with a soft, clean cloth. Clean stainless steel surfaces at least once a week. When applying stainless steel cleaner or polish to stainless steel hardware, work with the grain (not across the grain). Never use an abrasive sponge or cloth, steel wool or wired brush as these may permanently scratch the surfaces.



To maximize the life of your door, it is important to regularly inspect the glass and other hardware for misalignment, proper attachment, and/or damage. Contact DreamLine® with any questions or concerns.

ELEGANCE / ELEGANCE-LS Single Door Maintenance Checklist

- Check that the unit is stable, operates smoothly and that the installation is secure
- Confirm that all screws are tight
- Confirm that all vinyl seals are intact (replace if missing or damaged to prevent water leakage)
- Inspect exposed and concealed glass edges for damage
 - Damaged Glass Must be Replaced**

Troubleshooting

Problem/Symptom	Suggested Solution	Page(s)
Missing Parts	<ul style="list-style-type: none"> •Check all shipping/packaging material for missing parts/components. •If not found, contact DreamLine Customer Support [1-866-731-2244] to order factory part replacement. 	—
Door Glass (#03) does not close flush with the Strike Profile	<ul style="list-style-type: none"> • Inspect the Bottom Sweep Vinyl (#11) and ensure the orientation of the vinyl is installed correctly. •Check that the Strike Profile is installed correctly so the Door Glass closes flush with the Strike Vinyl Seal (#15) •Check that the reveal between the door and strike vinyl is consistent /even. Use a level and adjust the assembly as necessary 	20-23; 25
During operation the shower assembly shifts within the wall profile	<ul style="list-style-type: none"> •Check that the screws connecting the pivot-side Glass Profiles and Wall Profiles are installed correctly attaching the two extrusions together. •Install all ST4.0×10mm Pan Head Screws (#09) and Decorative Covers (#12) are securing the Glass Profiles to the Wall Profiles •Open the Door Glass (#03) and ensure the bottom Pivot Assembly-B (#02) is screwed down to the threshold. To create a tight seal, it may be necessary to screw down into the threshold 	24; 27
Water Leakage: beneath the bottom Pivot Assembly-B (#02)	<ul style="list-style-type: none"> •Inspect the silicone caulk application; Remove and replace if necessary •Check that the Bottom Sweep Vinyl (#11) makes contact with the Pivot Assembly-B (#02) when the door is in the closed position •Direct the water flow away from the area 	—
Water Leakage: beneath the Bottom Sweep Vinyl (#11)	<ul style="list-style-type: none"> •Inspect and ensure the threshold is pitched correctly into the shower •Check that the Bottom Sweep Vinyl (#11) is installed correctly onto bottom of the Door Glass (#03) •Direct the water flow away from the area 	25
Pivot Assemblies are binding on hinge-side Vinyl Insert	<ul style="list-style-type: none"> •Using a utility razor knife, notch the vinyl around the pivot. 	—



Prior to contacting DreamLine® Customer Service, please have the following information readily available:

- Purchase Order Information
 - Name, PO Number, Dealer/Vendor Name, etc.
- SKU/Model Number (see Pages 30-32)
- Factory Part Information (see Pages 30-32)

Factory Parts Information

ELEGANCE AND ELEGANCE-LS HARDWARE		FACTORY PARTS INFORMATION	
ITEM #	FACTORY PART NUMBER	ITEM DESCRIPTION	QTY
01	040370 11 -1830 / 040370 41 -1830 / 040370 61 -1830 / 040370 91 -1830	Wall Profile Pivot Side	1
02	040380 11 -1795 / 040380 41 -1795 / 040380 61 -1795 / 040380 91 -1795	Glass Profile Hinge Side (shorter)	1
03	(See Pages 30 and 31)	Door Glass	1
04	040380 11 -1830 / 040380 41 -1830 / 040380 61 -1830 / 040380 91 -1830	Glass Profile Strike Side (longer)	1
05	040370 11 -1830 / 040370 41 -1830 / 040370 61 -1830 / 040370 91 -1830	Wall Profile Strike Side	1
06	0722 10 41 / 0722 40 41 / 0722 60 41 / 0722 90 41	Handle	1
07	0701 10 53 / 0701 40 53 / 0701 60 53 / 0701 90 53	Pivot Bracket - Top (reversible)	1
08	0701 10 54 / 0701 40 54 / 0701 60 54 / 0701 90 54	Pivot Bracket - Bottom (reversible)	1
09	0755 10 11 / 0755 40 11 / 0755 60 11 / 0755 90 11	Decorative Cover and Washer	11
10a	063008000-1795 (72")	Bumper Seal	1
10b	063008000-1829 (70 5/8")	Bumper Seal	1
11	063015100-0753 / 063015100-0854 / 063015100-1000	Bottom Sweep (30", 34", 40")	1
12	07552148	Anchor	12
13	091202	Bolt M4 x 16 with washer	4
14	091101	Pan Head screw ST4.0 x 10	8
15	092105	Flat Head Screw ST4.2 x 25	2
16	090108	Large Truss Head Screw ST4.2 x 40	16
17	095202	Round Head Socket Bolt M6 x 12	1
18	094201	M6x12 Countersunk Hex Head Screw	1

BOLD digit indicates finish color:

1 = Chrome

4 = Brushed Nickel

6 = Oil-Rubbed Bronze

9 = Matte Black

Contact Support@DreamLine.com for Part replacement, installation assistance or additional information.

Complete **Warranty** information is available on DreamLine.com.

Factory Parts Information - Elegance Door Glass

25-1/4" - 27-1/4" ELEGANCE {SHDR-4125720-##}		FACTORY PARTS INFORMATION	
ITEM #	FACTORY PART NUMBER	ITEM DESCRIPTION	QTY
03	010071003	Door Glass	1 pc
27" - 29" ELEGANCE {SHDR-4127720-##}		FACTORY PARTS INFORMATION	
ITEM #	FACTORY PART NUMBER	ITEM DESCRIPTION	QTY
03	010071008	Door Glass	1 pc
28-3/4" - 30-3/4" ELEGANCE {SHDR-4128720-##}		FACTORY PARTS INFORMATION	
ITEM #	FACTORY PART NUMBER	ITEM DESCRIPTION	QTY
03	010071008	Door Glass	1 pc
30-1/2" - 32-1/2" ELEGANCE {SHDR-4130720-##}		FACTORY PARTS INFORMATION	
ITEM #	FACTORY PART NUMBER	ITEM DESCRIPTION	QTY
03	010071008	Door Glass	1 pc
32-1/4" - 34-1/2" ELEGANCE {SHDR-4132720-##}		FACTORY PARTS INFORMATION	
ITEM #	FACTORY PART NUMBER	ITEM DESCRIPTION	QTY
03	010071008	Door Glass	1 pc
34" - 36" ELEGANCE {SHDR-4134720-##}		FACTORY PARTS INFORMATION	
ITEM #	FACTORY PART NUMBER	ITEM DESCRIPTION	QTY
03	010071008	Door Glass	1 pc
35-3/4" - 37-3/4" ELEGANCE {SHDR-4135720-##}		FACTORY PARTS INFORMATION	
ITEM #	FACTORY PART NUMBER	ITEM DESCRIPTION	QTY
03	010071008	Door Glass	1 pc

Contact Support@DreamLine.com for Part replacement, installation assistance or additional information.
Complete **Warranty** information is available on DreamLine.com.

Factory Parts Information - Elegance-LS Door Glass

25-1/4" - 27-1/4" ELEGANCE-LS {SHDR-4325000-##}		FACTORY PARTS INFORMATION	
ITEM #	FACTORY PART NUMBER	ITEM DESCRIPTION	QTY
03	010071002	Door Glass	1 pc
27" - 29" ELEGANCE-LS {SHDR-4327000-##}		FACTORY PARTS INFORMATION	
ITEM #	FACTORY PART NUMBER	ITEM DESCRIPTION	QTY
03	010071003	Door Glass	1 pc
28-3/4" - 30-3/4" ELEGANCE-LS {SHDR-4328000-##}		FACTORY PARTS INFORMATION	
ITEM #	FACTORY PART NUMBER	ITEM DESCRIPTION	QTY
03	010071004	Door Glass	1 pc
29-1/4" - 34-1/4" ELEGANCE-LS {SHDR-4325060-##}		FACTORY PARTS INFORMATION	
ITEM #	FACTORY PART NUMBER	ITEM DESCRIPTION	QTY
03	010071005	Door Glass	1 pc
30-1/2" - 32-1/2" ELEGANCE {SHDR-4330000-##}		FACTORY PARTS INFORMATION	
ITEM #	FACTORY PART NUMBER	ITEM DESCRIPTION	QTY
03	10071006	Door Glass	1 pc
31" - 33" ELEGANCE {SHDR-4327060-##}		FACTORY PARTS INFORMATION	
ITEM #	FACTORY PART NUMBER	ITEM DESCRIPTION	QTY
03	010071007	Door Glass	1 pc
32-1/4" - 34-1/4" ELEGANCE {SHDR-4332000-##}		FACTORY PARTS INFORMATION	
ITEM #	FACTORY PART NUMBER	ITEM DESCRIPTION	QTY
03	010071008	Door Glass	1 pc

Contact Support@DreamLine.com for Part replacement, installation assistance or additional information.
Complete **Warranty** information is available on DreamLine.com.

NOTES

© DreamLine
All Rights Reserved

© DreamLine
All Rights Reserved



TEL: 866-731-2244
FAX: 866-857-3638
DREAMLINE.COM



For more information on DreamLine® Shower Doors and Enclosures please visit **DreamLine.com**



INLINE PANEL - STYLE B

INLINE PANEL INSTALLATION INSTRUCTIONS


IMPORTANT

DreamLine® reserves the right to alter, modify or redesign products at any time without prior notice. For the latest up-to-date technical drawings, manuals, warranty information or additional details please refer to your model's web page on DreamLine.com


This inline panel is used with the following models:

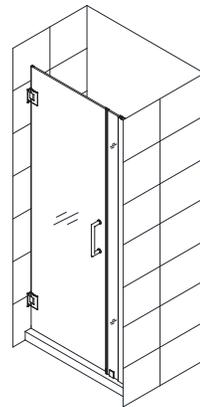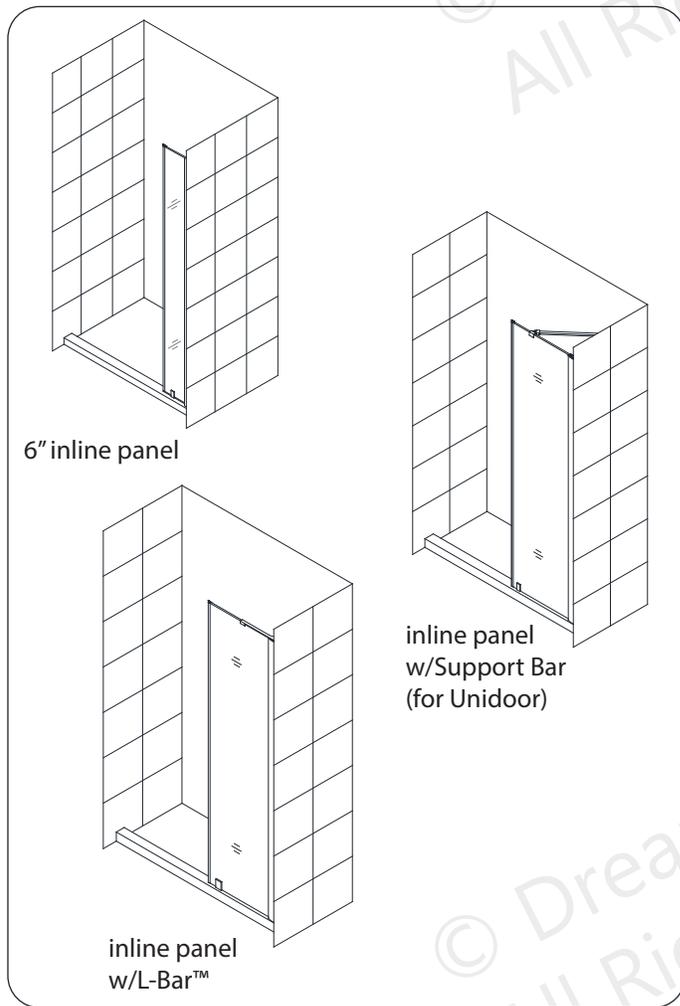


UNIDOOR Style B w/6" panel

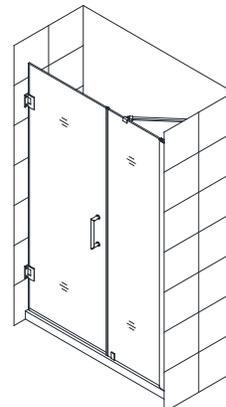

UNIDOOR Style B w/Support Bar

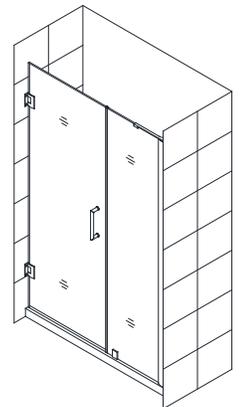


UNIDOOR -LS Style B w/L-Bar™

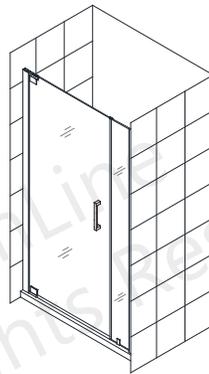

ELEGANCE-LS / ATLAS Style B w/6" panel



ELEGANCE-LS / ATLAS Style B w/L-Bar™

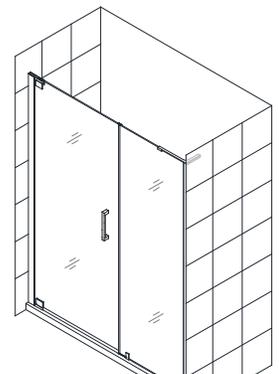

Right-side inline panel installation shown

PLEASE REVIEW THIS ENTIRE MANUAL PRIOR TO INSTALLATION



Questions?

Please Call **DreamLine Customer Support: 1-855-831-2126**
Hours of Operation M-F 8AM - 7PM EST and Saturday 9AM - 5PM EST

Support@DreamLine.com



For more information about DreamLine® Shower Doors, Tub Doors & Enclosures, please visit DreamLine.com

Model #s

UNIDOOR - Style B w/ 6" inline

MODEL #s

SHDR-20297210-##
SHDR-20307210-##
SHDR-20317210-##
SHDR-20327210-##
SHDR-20337210-##
SHDR-20347210-##
SHDR-20357210-##
SHDR-20367210-##

UNIDOOR - Style B inline w/ Support Bar

MODEL #s

SHDR-20417210C-##
SHDR-20427210C-##
SHDR-20437210-##
SHDR-20447210-##
SHDR-20457210-##
SHDR-20467210-##
SHDR-20477210-##
SHDR-20487210-##
SHDR-20477210C-##
SHDR-20487210C-##
SHDR-20497210-##
SHDR-20507210-##
SHDR-20517210-##
SHDR-20527210-##
SHDR-20537210-##
SHDR-20547210-##
SHDR-20537210C-##
SHDR-20547210C-##
SHDR-20557210-##
SHDR-20567210-##
SHDR-20577210-##
SHDR-20587210-##
SHDR-20597210-##
SHDR-20607210-##

UNIDOOR - Style B inline w/L-Bar™

MODEL #s

SHDR-2035723-##
SHDR-2036723-##
SHDR-2037722-##
SHDR-2038722-##
SHDR-2039722-##
SHDR-2040722-##
SHDR-2041722-##
SHDR-2042722-##
SHDR-2041723-##
SHDR-2042723-##
SHDR-2043722-##
SHDR-2044722-##
SHDR-2045722-##
SHDR-2046722-##
SHDR-2047722-##
SHDR-2048722-##
SHDR-2047723-##
SHDR-2048723-##
SHDR-2049722-##
SHDR-2050722-##
SHDR-2051722-##
SHDR-2052722-##
SHDR-2053722-##
SHDR-2054722-##
SHDR-2053723-##
SHDR-2054723-##
SHDR-2055722-##
SHDR-2056722-##
SHDR-2057722-##
SHDR-2058722-##
SHDR-2059722-##
SHDR-2060722-##

ELEGANCE-LS / ATLAS - Style B w/ 6" inline

MODEL #s

SHDR-4325060-##
SHDR-4327060-##
SHDR-4328060-##
SHDR-4330060-##
SHDR-4332060-##
SHDR-4334060-##
SHDR-4335060-##

ELEGANCE-LS / ATLAS - Style B inline w/L-Bar™

MODEL #s

SHDR-4325120-##
SHDR-4327120-##
SHDR-4328120-##
SHDR-4330120-##
SHDR-4332120-##
SHDR-4334120-##
SHDR-4335120-##
SHDR-4325180-##
SHDR-4327180-##
SHDR-4328180-##
SHDR-4330180-##
SHDR-4332180-##
SHDR-4334180-##
SHDR-4335180-##
SHDR-4325240-##
SHDR-4327240-##
SHDR-4328240-##
SHDR-4330240-##
SHDR-4332240-##
SHDR-4334240-##
SHDR-4335240-##
SHDR-4325300-##
SHDR-4327300-##
SHDR-4328300-##
SHDR-4330300-##
SHDR-4332300-##
SHDR-4334300-##
SHDR-4335300-##

= Finish

01- Chrome
04- Brushed Nickel
06- Oil Rubbed Bronze
09- Satin Black



This model is treated with DreamLine's exclusive ClearMax™ Glass technology. This is a specially formulated coating that prevents the buildup of soap and water spots.

Install the surface with the ClearMax™ label towards the inside of the shower. Please note that depending on the model, the glass may be coated on either one or both surfaces.

For best results, squeegee the glass after each use and dry with a soft cloth.


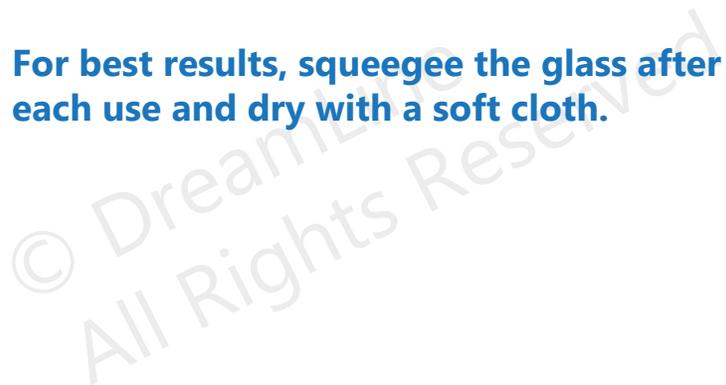


Table of Contents

Section title	Page #
Preparation	2
Tools	3
Detailed Diagram of Shower Panel Components	4
Parts List	5
Adjustable Wall Profile System	6
Installation Steps	7-16
Vinyl Seals	9
Support Bar Installation	13
L-Bar Assembly	14
Product maintenance	17

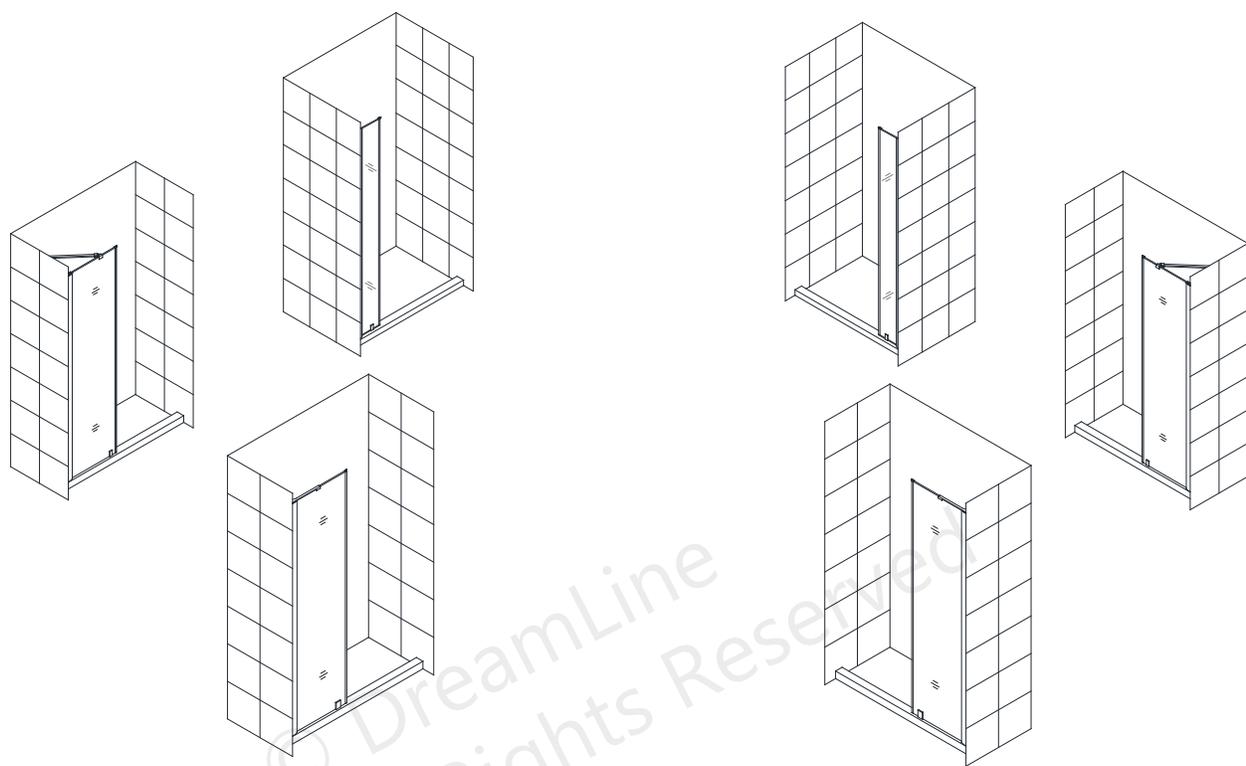

Left-side inline panel installation

Right-side inline panel installation



NOTE: This model is reversible for right or left-side panel installation. The right-side panel installation is shown as an example throughout this manual. For the left-side panel installation, simply begin on the opposite wall and reverse the orientation of the steps shown.

Preparation

1. Prior to installation, examine all boxes and packages for shipping damage and compare the piece count with the packing slip. After opening all boxes and packages read this introduction carefully. Check that all of the necessary parts are included in the package by checking off the components on the "Detailed Diagram of Shower Panel Components". If the unit has been damaged, has a finishing defect, or has missing parts, please contact our customer support department within **3 business days** of the delivery date. **Please note that DreamLine® will not replace any damaged products or missing parts free of charge after 3 business days or if the product has been installed.** Contact DreamLine® if you have any questions, and please provide an order number, job name or other proof of purchase to help identify the original order.

2. **Please note that you should consult your local building codes with questions on installation compliance standards. Building and plumbing codes may vary by location, and DreamLine® is not responsible for code compliance standards for your project and will not accept any returns.**

3. If this unit is going to be installed in a new construction, please install all of the required plumbing and drainage before installing the shower. Use a competent and licensed (if required by local code) plumber for all plumbing installation

4. Make sure that prior to beginning the installation, the surfaces are leveled and solid and will be able to support the total weight of the unit. Also make sure the walls are at right angles. Irregular installation surface level, radius corners or improper angle of side walls will result in serious problems for your installation. Note that some adjustments and drilling will be necessary during the installation process.

5. Protect all primary surfaces of the product during installation. Never set the glass down directly onto a tile floor. Leave corner protectors in place until necessary to remove them. Always use a piece of wood or cardboard to protect the bottom edge and corners of the glass prior to and during installation.

6. **This unit must be installed upon a finished threshold and against finished walls.**

7. **This model requires that you drill into the threshold for proper installation. Contact the manufacturer of the base or threshold material with any questions regarding the drilling of holes into their product.**


8. This model requires a minimum of **1-1/2"** of flat level threshold space for installation.

9. **Professional installation recommended.**




NOTE: DO NOT attach the handle to the door glass until instructed.
DO NOT use the handle or towel bar to lift the glass during installation. This may result in damage to the glass and/or serious injury. Always use an assistant or a professional grade glass suction cup when handling heavy glass.

Tools



Level



Tape Measure



Pencil



Drill bit (Ø5/16") (8mm)




Drill bit (Ø1/8") (3mm)



Power Drill




Phillips Screwdriver




Silicone



Soft Head Hammer



Mallet



Knife





Professional-grade Glass suction cup

Tip: Measure the finished opening before proceeding with the installation to be sure that the correct model size has been ordered.

Tip: Prior to installation, cover the shower/tub drain with tape to prevent losing screws or small parts.

Tip: Set screw gun clutch to low setting when installing screws and bolts to prevent stripping the heads.

Threshold must be level

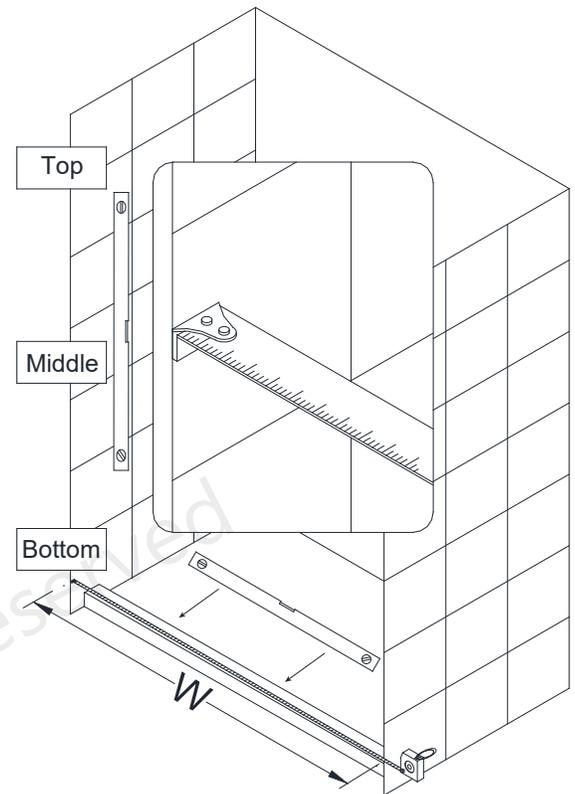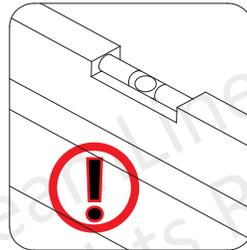


NOTE: Unpack your unit carefully and inspect it. Lay it out and identify all parts using the detailed diagram and packing list in this manual as a reference. Before discarding the carton, check for small hardware bags that may have fallen to the bottom of the box. If any parts are damaged or missing, please contact DreamLine® for replacement. The shipping boxes may contain extra parts not used in your model configuration.

NOTE: Retain these installation instructions for future reference.


Detailed Diagram of Shower Panel components

Diagram A

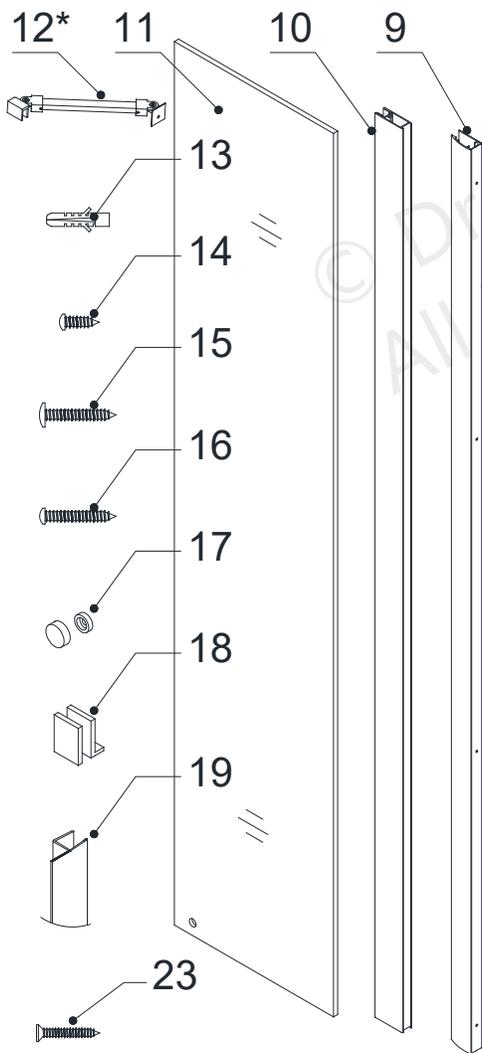

*part#12 (Support Bar) not included with 6" inline panel

Diagram B

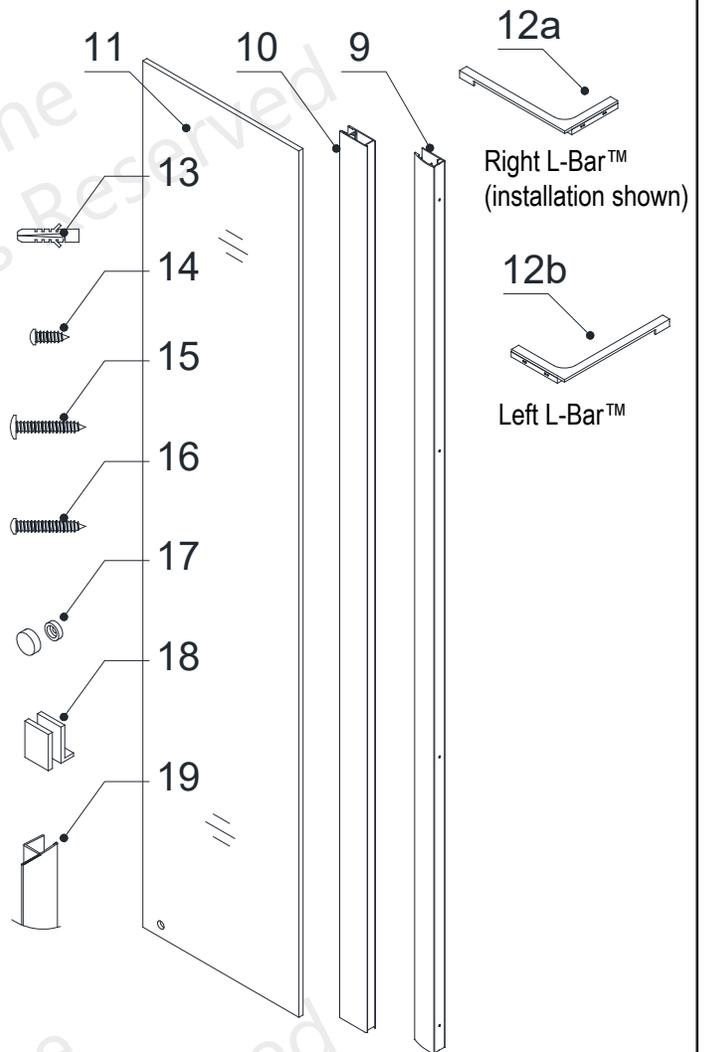

Right side panel installation shown (using Right L-Bar™)



The glass surface with the ClearMax™ label must be installed to face inside of the shower

Parts List

Diagram A


PART#	DESCRIPTION	QTY	PART#	DESCRIPTION	QTY
09	Wall profile	1pc	15	Truss head screw ST4.2x40	4pcs
10	Glass profile	1pc	16	Pan head screw ST4.2x35	1pc
11	Panel glass	1pc	17	Decorative screw cover and washer	4pcs
12*	Support bar *	1pc	18	Bottom bracket	1pc
13	Wall Anchor	4pcs	19	Anti-Water strip (inline)	1pc
14	Pan head screw ST4.2x10	3pcs	23	Countersunk screw ST4.2x40 *	1pc

*part#12 support bar is not included with models that use the 6" inline panel





Diagram B

PART#	DESCRIPTION	QTY	PART#	DESCRIPTION	QTY
09	Wall profile	1pc	15	Truss Head screw ST4.2x40	4pcs
10	Glass profile	1pc	16	Round head screw ST4.2x35	1pc
11	Panel Glass	1pc	17	Decorative screw cover amd washer	4pcs
12a/12b	L-Bar™ (Right and Left)	1set	18	Bottom bracket	1pc
13	Wall Anchor	4pcs	19	Anti-Water strip (inline)	1pc
14	Pan head screw ST4.2x10	3pcs			

Adjustable Wall Profile System

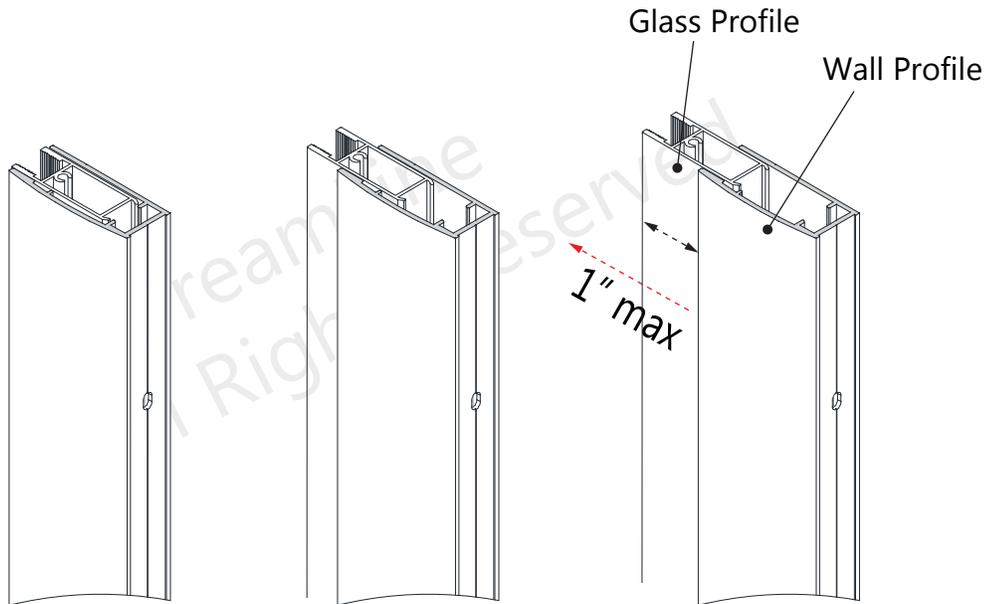

The Glass Profiles can be adjusted within the Wall Profiles for overall width or to correct for out-of-plumb conditions within the model size. Screw them together after making final adjustments.

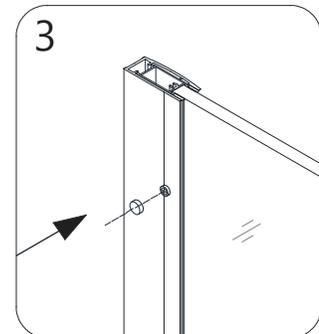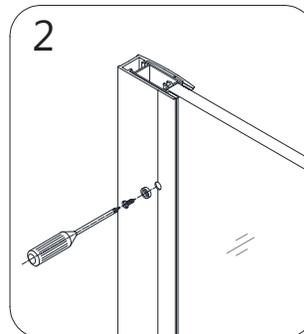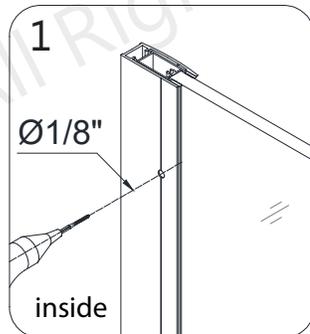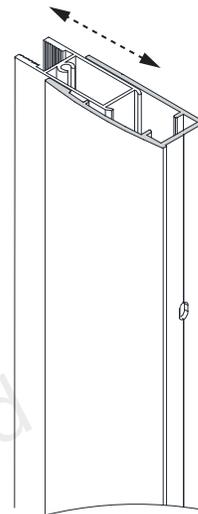


Installation steps

! **NOTE:** The UNIDOOR or ELEGANCE shower door needs to be installed prior to proceeding with the following Inline Panel Glass installation. Please see the Single Shower Door installation manual included in the door packaging for complete shower door installation instructions. Before beginning the installation, recheck the finished opening size. Specific model size information can be found on DreamLine.com.

! **NOTE:** The Unidoor and Elegance hinges are factory set to over close 8°. The following procedure is recommended to ensure proper alignment of the panel glass and door glass.

! **NOTE:** The left-swing Unidoor door installation is shown as an example throughout this manual. Use the same method for aligning the door and panel for the Elegance door and inline panel installation.

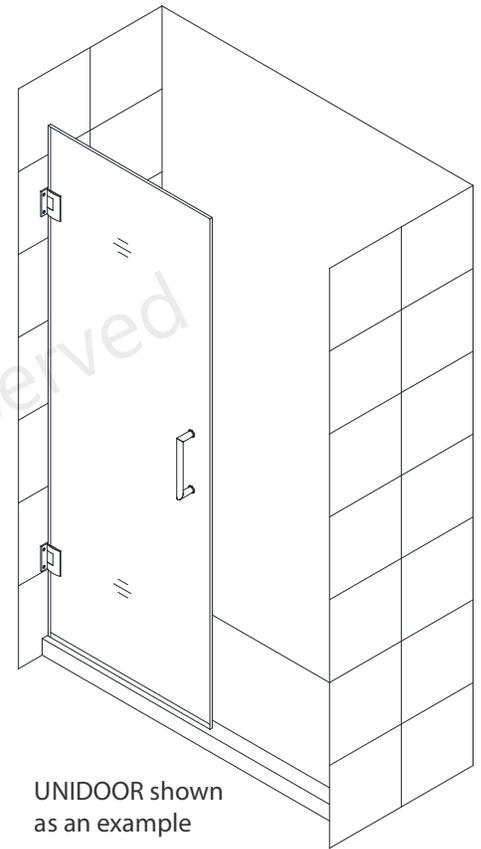

1. Align the **Door** so that it is perpendicular to the wall and parallel with the outside of the threshold. Mark a line on the threshold for reference. Open the door to allow space for the panel installation. **(Fig 1)**

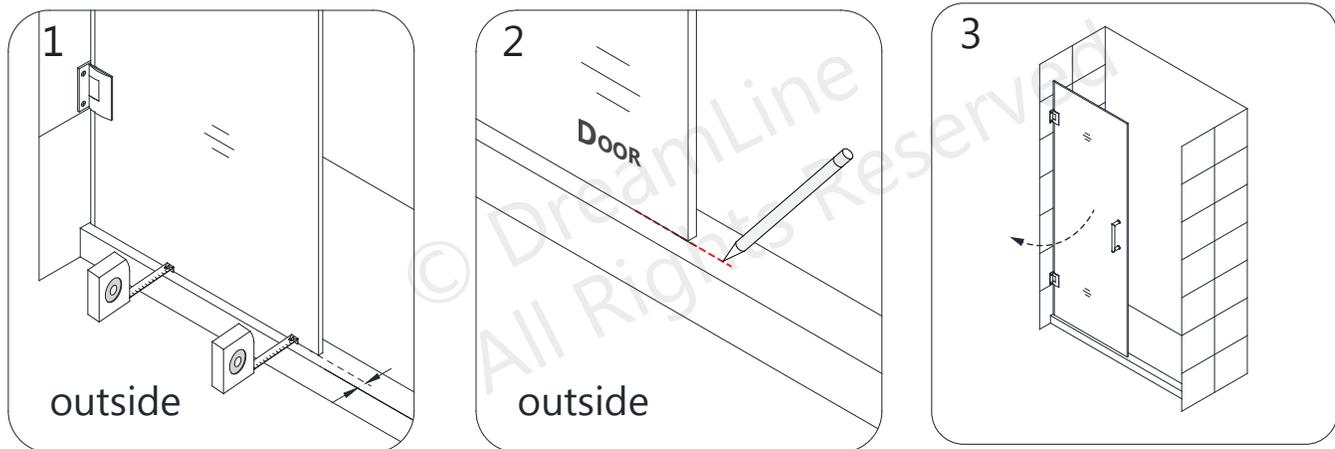


Fig 1

2. Apply clear silicone into the entire length of the channel of the **Glass Profile (#10)** and attach it to the edge of the **Panel Glass (#11)**. Make sure the **Glass Profile (#10)** is flush with the top and bottom of the **Panel Glass (#11)**.

Insert the **Panel Glass (#11)** with the attached **Glass Profile (#10)** into the **Wall Profile (#09)**. (Fig 2)




ATTENTION: Please note that the bottom hole in the corner of the Panel Glass must be opposite from the Glass Profile.



NOTE: If the Glass Profile fit is too tight over the Panel Glass, use a rubber mallet and a piece of wood to gently tap on the glass profile. Never use a metal hammer or hit the profile without a wood bumper.




If possible, allow the silicone to cure before handling the assembled panel.

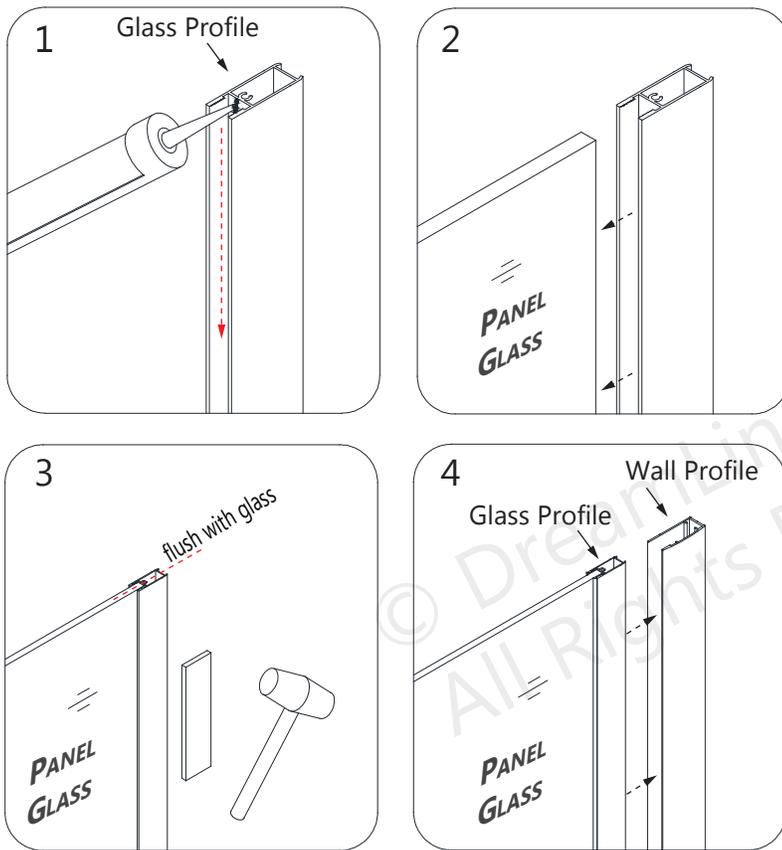

If necessary, use a rubber mallet to tap on the glass profile

Fig 2

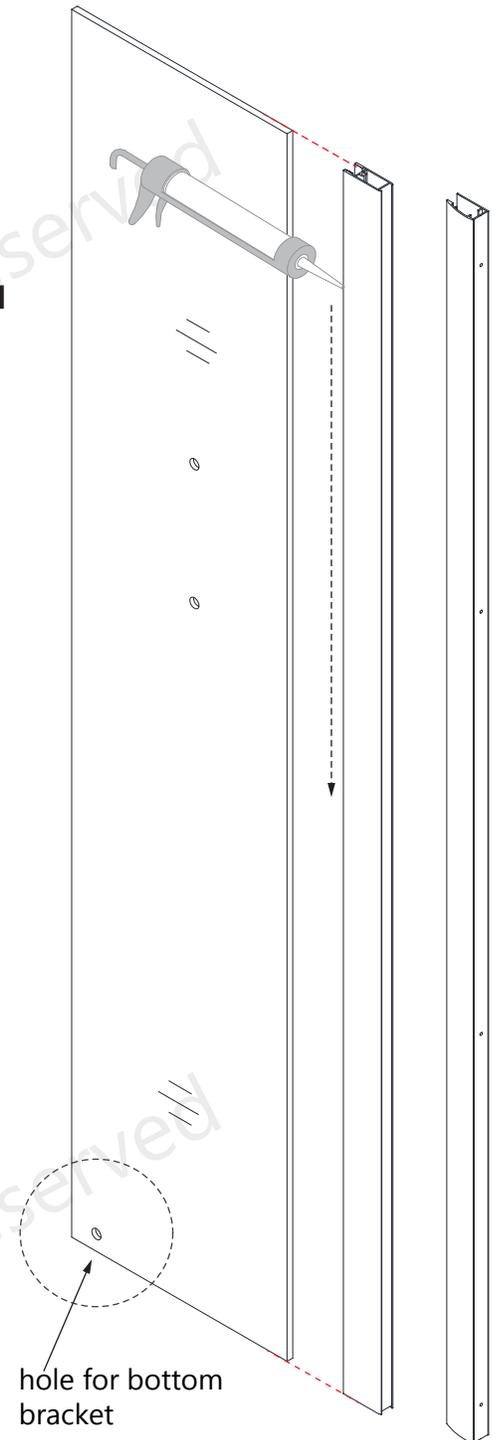

3. Press the **Anti-Water Strip (inline) (#19)** onto the vertical edge of the **Panel Glass (#11)**. (This will protect the edge of the panel glass and allow for proper spacing with the door glass). Attach the **Bottom Bracket (#18)** through the bottom hole of the **Panel Glass (#11)**. **(Fig 3)**

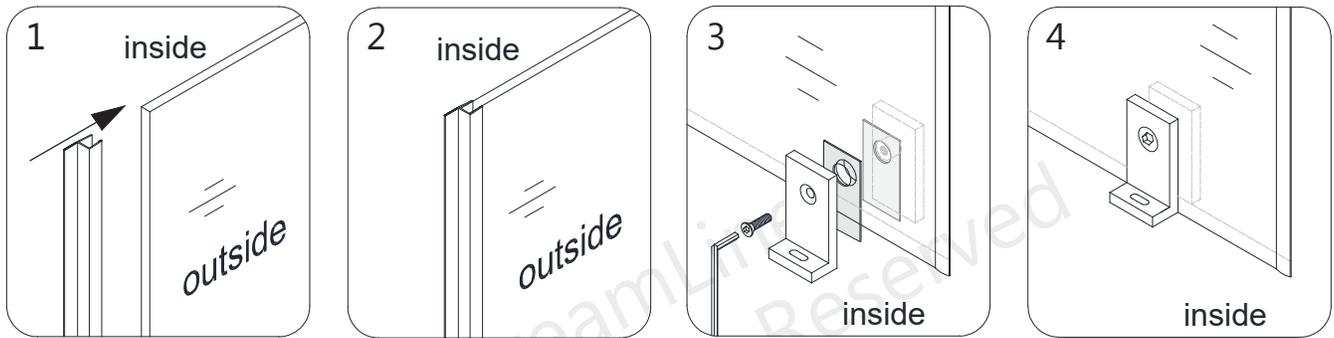


Fig 3

4. Carefully position the **assembled panel** onto the threshold and against the wall. Push the **Wall Profile (#09)** tight to the wall while holding the panel tight to the threshold. **(Fig 4)**



Use Caution not to bang the glass onto the threshold.

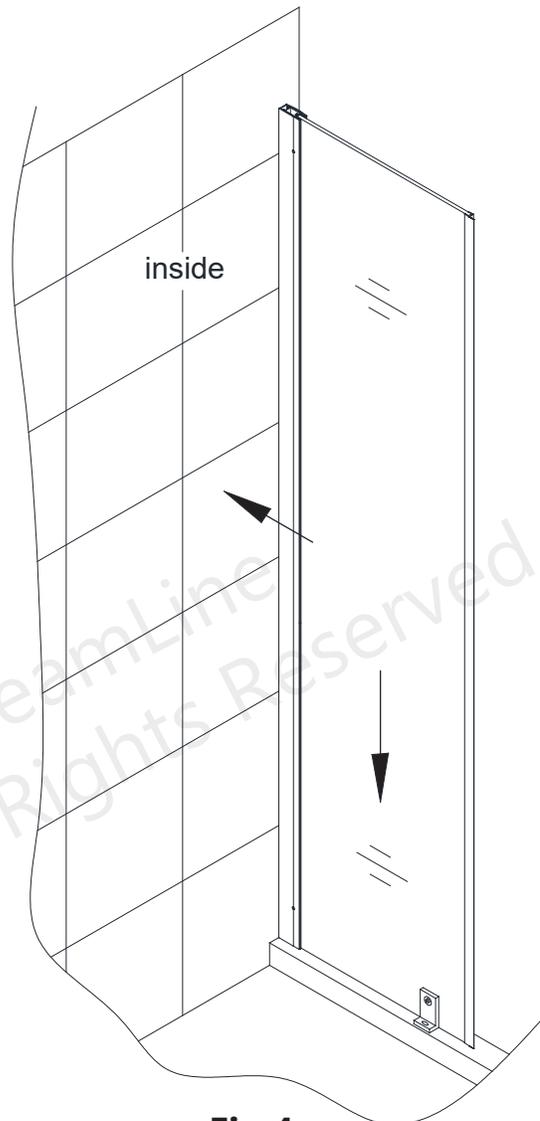


Fig 4

5. Close the **Door** and align the **Panel Glass (#11)** with the **Door**. Use the reference mark on the threshold (from **Step #1**) to confirm that the **Door** is perpendicular to the wall.

If necessary, adjust the position of the **Panel Glass (#11)** so that the **Anti-Water Strip (inline) (#19)** makes contact with the **Door Glass** from top to bottom and creates a seal.

- Mark the wall along the inner edge of the **Wall Profile (#09)**.
- Mark the drilling hole onto the threshold through the hole in the **Bottom Bracket (#18)**. (**Fig 5**)



The two-piece wall profile system (consisting of the glass profiles and wall profiles) will allow for overall width and/or out-of-plumb adjustment within the model size. See page 6 for details.

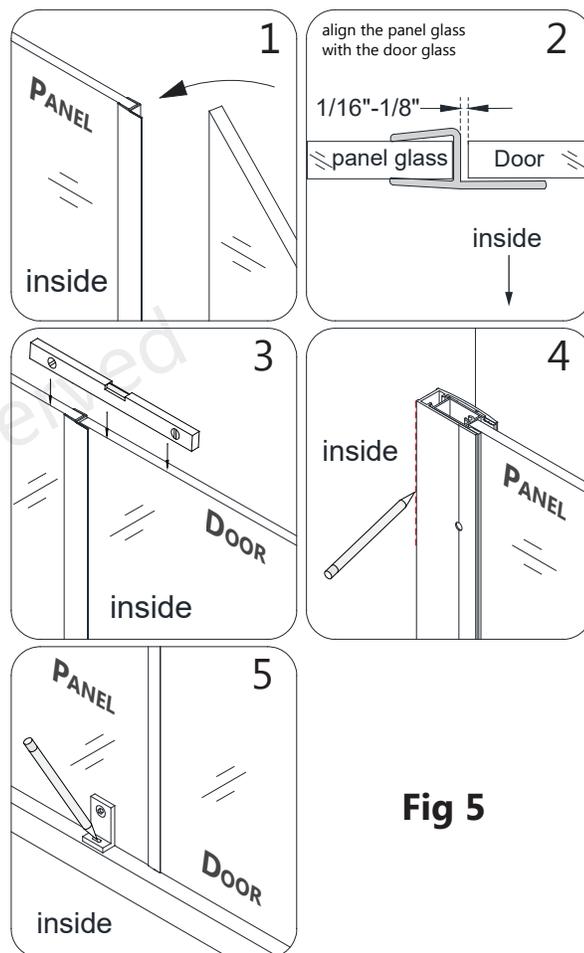
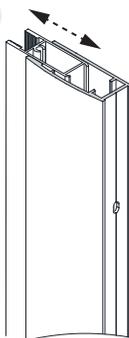


Fig 5

6. Remove the **Wall Profile (#09)** from the **Panel Glass (#11)** and **Glass Profile (#10)** assembly. Place the **Wall Profile (#09)** back onto the outlined position on the wall and mark the holes for drilling through the predrilled holes in the **Wall Profile (#09)**.

Drill the holes in the wall using a **Ø5/16"** drill bit and insert the **Wall Anchors (#13)**.

Apply silicone along the back of the **Wall Profile (#09)** and around the holes on the wall.

Fasten the **Wall Profile (#09)** to the wall with the **Truss Head Screw ST4.2×40 (#15)**. (**Fig 6**)



Use Caution not to pull the Glass Profile (#10) off of the Panel Glass (#11).

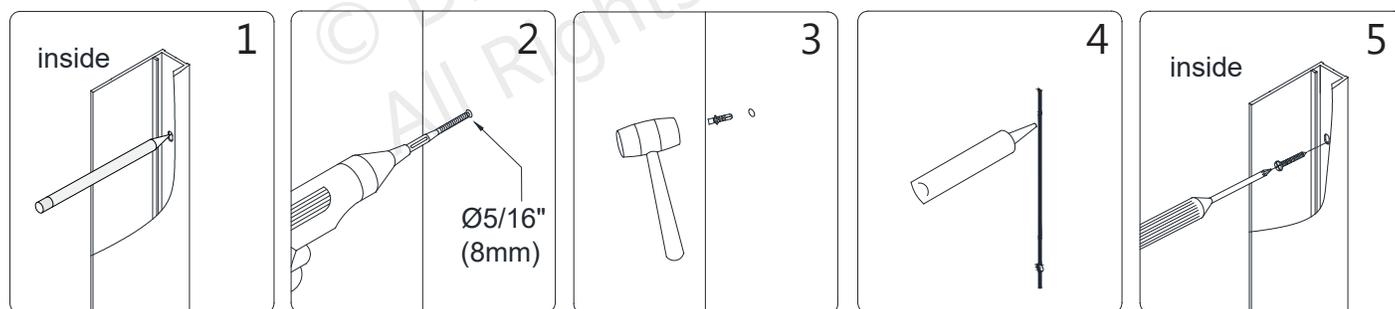


Fig 6



Double check the alignment and spacing of the panel glass with the door glass before drilling into the threshold for the bottom bracket.

7. Drill a hole for the **Bottom Bracket (#18)** into the threshold at the mark that was made in Step #5.
 ** Use an **Ø1/8"** drill bit for installation into an acrylic base OR use a **Ø5/16"** drill bit and an anchor for installation into a tile threshold. Use the **Pan Head Screw ST4.2x35 (#16)** along with a raised white washer to attach the **Bottom Bracket (#18)** to the threshold and snap on the **Decorative Screw Cover (#17)**. (**Fig 7a and Fig 7b**)

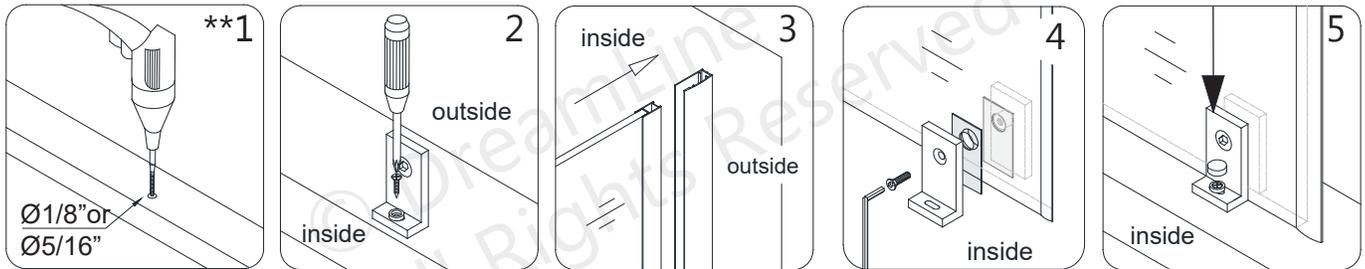


Fig 7a



! *NOTE:

▪ For installation into an **Acrylic Threshold:**
 drill a **Ø1/8" (3mm)** hole and use the **Pan Head Screw ST4.2 x 35mm (#16)**

OR

▪ For installation into a **Tile Threshold:**
 drill a **Ø5/16" (8mm)** hole, install a **Wall Anchor 5/16" (#13)** and use the **Pan Head Screw ST4.2 x 35mm (#16)**

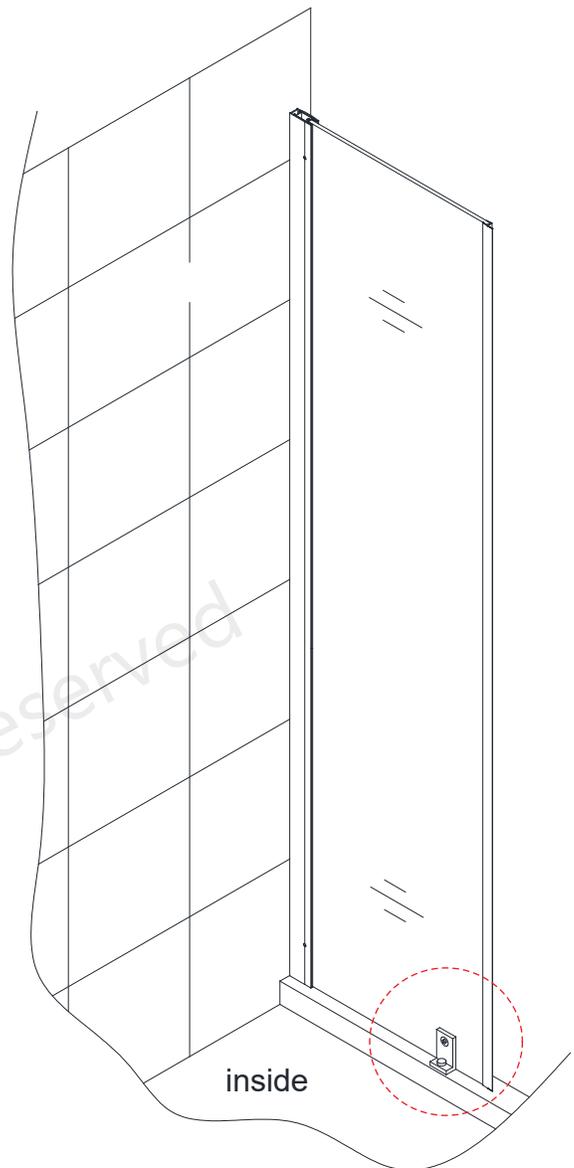


Fig 7b

8. Recheck the alignment and spacing of the **Door Glass** and **Panel Glass (#11)** and test the operation of the Door. After final adjustments of the **Panel Glass (#11)** drill holes into the **Glass Profile (#10)** through the predrilled holes in the **Wall Profile (#09)** using an $\text{Ø}1/8''$ drill bit. Use the **Pan Head Screws ST4.2×10 (#14)** and **Washers (#17)** to attach the **Wall Profile (#09)** to the **Glass Profile (#10)**. Cover the exposed screw heads with **Decorative Screw Cover (#17)**. (**Fig 8**)

! **NOTE:** Only drill through the first layer of the Glass Profile.

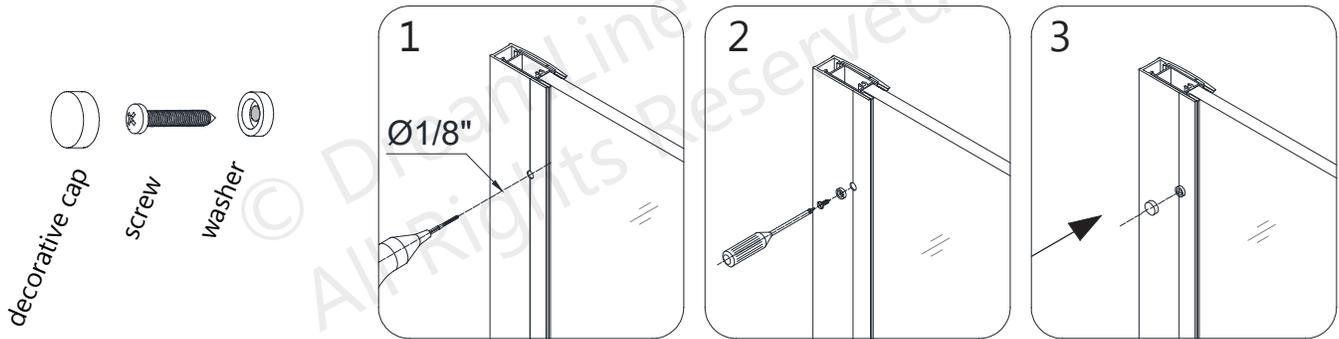


Fig 8

9. Apply a good quality mildew-resistant silicone along the connection of the **Wall Profile (#09)** to the wall and the panel glass to the threshold. (**Fig 9a**)

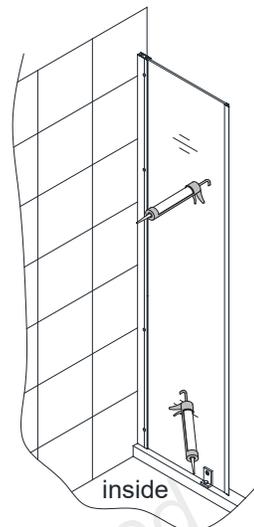


Fig 9a

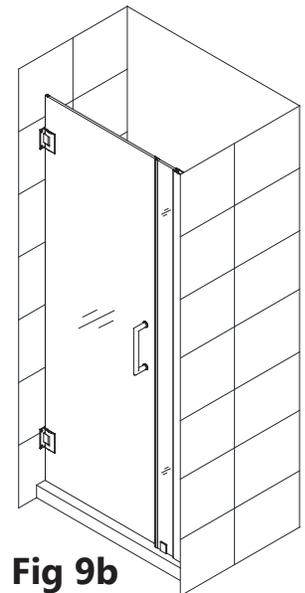


Fig 9b

Unidoor Style B w/6" panel shown

! If installing a model with a 6" stationary panel, no additional support is required and the installation is complete. (**Fig 9b**)

! If the Stationary Panel width is larger than 6" proceed to:
 •Step#11 for the Support Bar installation
 or
 •Step#12 for the L-Bar™ installation.

The installation is not complete until the required Support Bar or L-Bar™ has been installed

Support Bar Assembly and Installation

10. Attach the **Support Bar (#12)** to the Panel Glass as shown.

- Adjust the **Support Bar (#12)** to a proper position on the glass and the wall (ideally at a 45° angle) and level it.
- Outline the Wall Bracket's position on the wall [Fig 10.2](#).
- Remove the Wall Bracket from the **Support Bar (#12)**.
- Place the Wall Bracket against its outlined position on the wall and mark the hole for drilling.
- Drill the hole using a **Ø5/16"** drill bit, insert the **Wall Anchor (#13)** and fasten the Wall Bracket to the wall with the **Countersunk Screw ST4.2×40 (#23)**.
- Attach the **Support Bar (#12)** to the Wall Bracket as shown on [Fig 10.7](#) and tighten the set screws and the glass holding screw to secure the glass. **(Fig 10)**


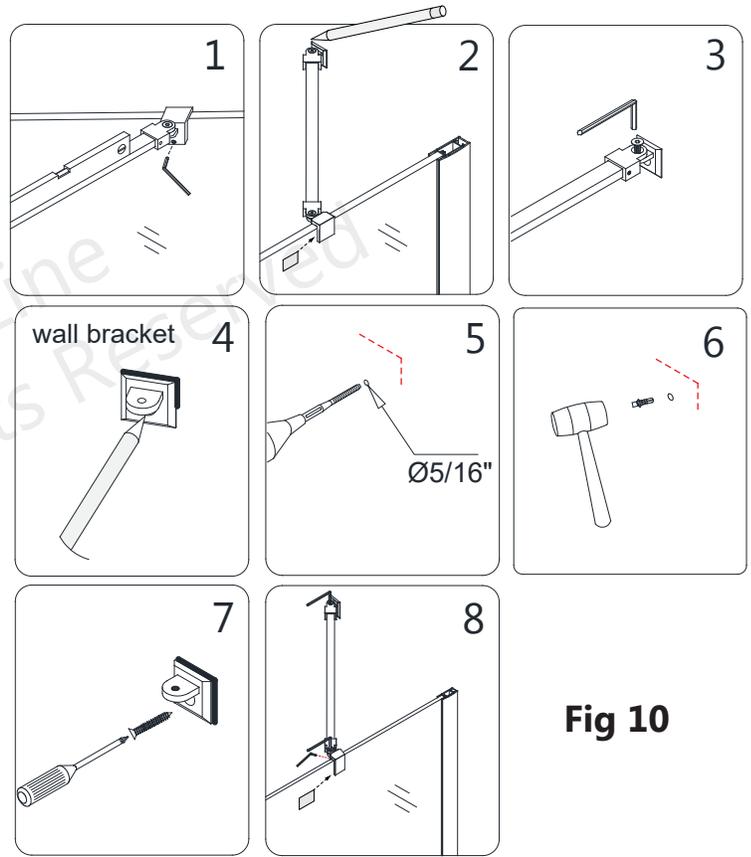


Fig 10




NOTE: Make sure that the rubber gasket and/or the rubber tipped set screw are in place when securing the Support Bar to the glass to prevent glass to metal contact.

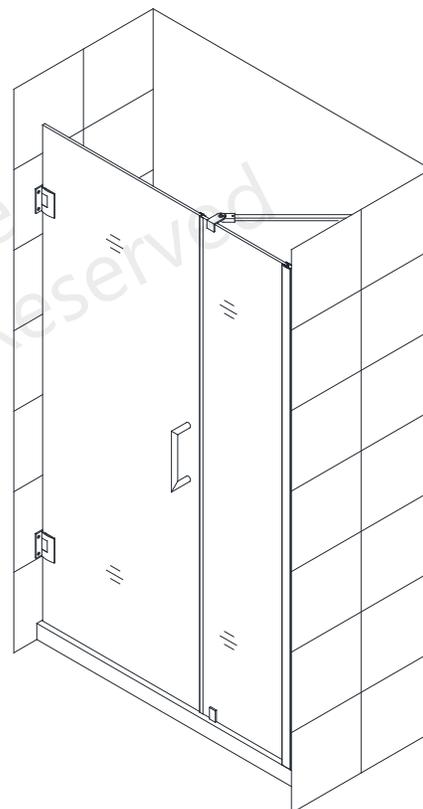


**Unidoor Style B
with Support Bar**

L-Bar™ Parts List Assembly

(Right L-Bar™ shown)

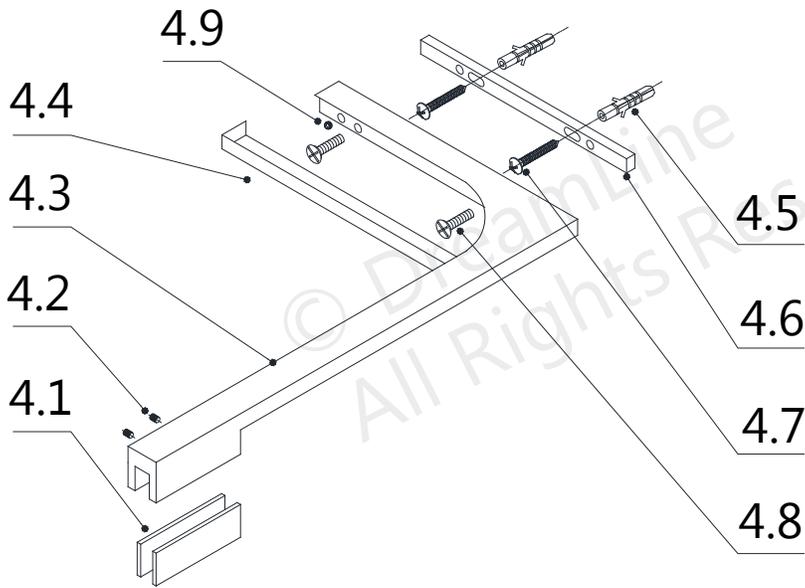

Right L-Bar™ installation shown as an example

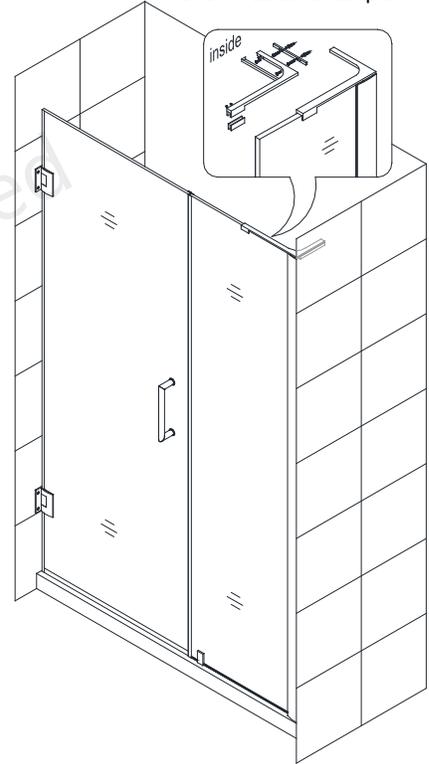

Unidoor-LS -Style B

PART#	DESCRIPTION	QTY	PART#	DESCRIPTION	QTY
4.1	PVC spacer	2pcs	4.6	Wall Plate	1pc
4.2	M5 rubber tip set screw	2pcs	4.7	Truss Head Screw ST4.2x40	2pcs
4.3	L-Bar™(Right-hand shown)	1pc	4.8	Flat Head Screw M5x14	2pcs
4.4	Decorative cover	1set	4.9	Wall Plate adjustment set screw	2pcs
4.5	Ø5/16" Wall Anchor	2pcs			

11. Position the **L-Bar™ assembly (#4.3)** onto the **Panel Glass** as shown (**Fig 11.1**). Be sure the gaskets are in place to protect the glass. Make it level and mark the position on the wall. Remove the **Decorative Cover (#4.4)** and **Wall Plate (#4.6)** from the **L-Bar™**. Position the **Wall Plate (#4.6)** on the marks on the wall and adjust for level. Mark the holes for drilling through the wider, untapped holes (**Fig 11.3**). Drill two **Ø5/16" (8mm)** holes and insert the **Ø5/16" Wall Anchors (#4.5)**. (**Fig 11**)



NOTE: When marking the **L-Bar™** location on the wall, leave the **Decorative Cover** attached to allow space to re-attach the **Decorative Cover** after installation.

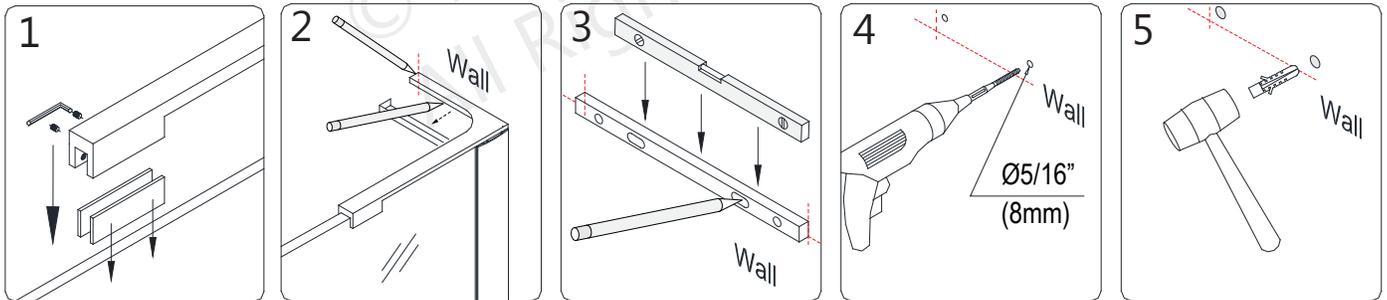


Fig 11

12. Attach the **Wall Plate (#4.6)** to the wall using the **ST4.2 x 40 Truss Head Screws (#4.7)**. Re-attach the **L-Bar™ (#4.3)** to the **Wall Plate (#4.6)** using the **Flat Head Screw M5x14 (#4.8)**. Adjust the angle of the **L-Bar™** if necessary by using the **Wall Plate Adjustment Set Screws (#4.9)**. (**Fig 12**)

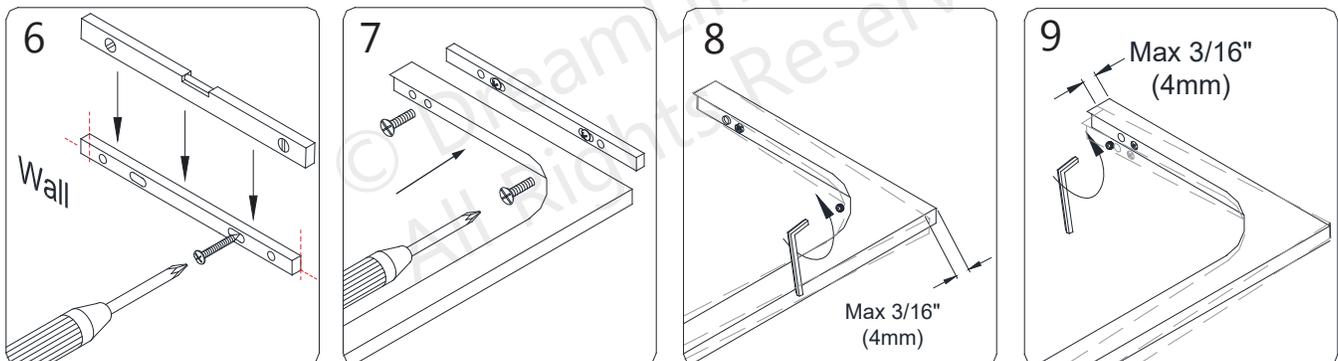


Fig 12

13. Adjust the **Stationary Panel Glass** to plumb if necessary and tighten the screws. Attach the **Decorative Cover (#4.4)** to the **L-Bar™ (#4.3)**. Firmly secure the **L-Bar™ (#4.3)** to the top of the **Panel Glass** using the clear gasket and rubber-tipped set screws. **(Fig 13)**

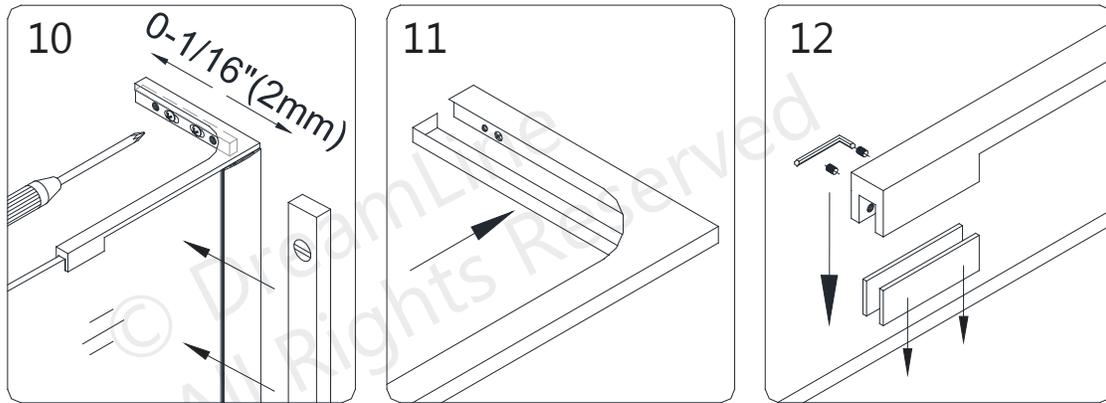


Fig 13

14. Apply a good quality mildew-resistant silicone along the connection of the **Wall Profile** to the wall and the **Panel Glass** to the threshold. **(Fig 14)**



Allow 24 hours for the silicone to fully cure before using the shower.

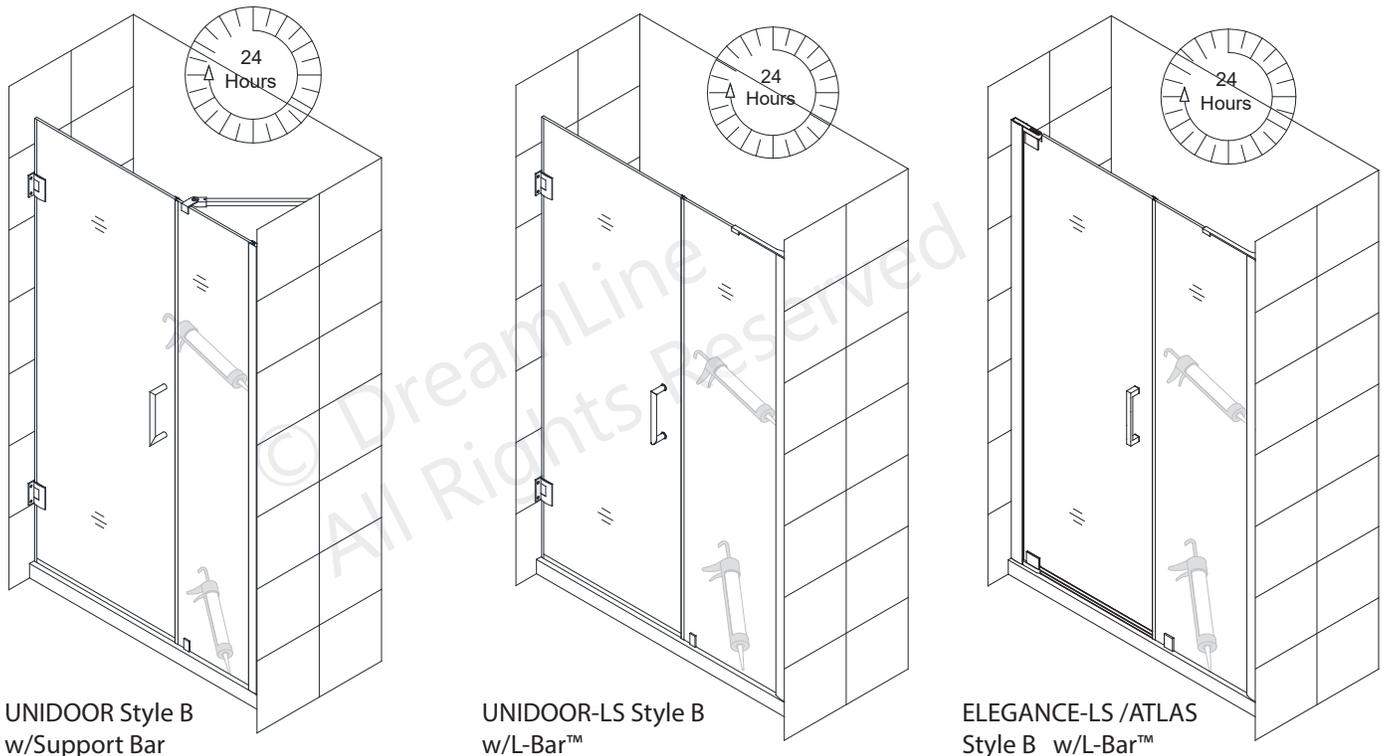


Fig 14

Product Maintenance

BASES and BACKWALLS: To ensure long-lasting life for your acrylic back walls, wipe them off after each use with a soft cloth. To clean the acrylic back walls use non-abrasive sprays or cream based cleaners. Avoid the use of aerosol spray cleaners. Never use abrasive cleansers, metal brushes or scrapers that could scratch or dull the surface.

GLASS: To ensure long-lasting life for your glass shower products, wipe them off after each use with a soft cloth. Rinse and wipe off the glass using either a soft cloth or a squeegee to prevent soap buildup and water spots (Hard water can etch the surface of the glass over time if left to dry). To prevent scratching the surface: never use abrasive cleaners or cleaning products that contain scouring agents. Never use bristle brushes or abrasive sponges that may scratch the surface.

HARDWARE: To ensure a long-lasting finish, wipe off the metal parts after each use with a soft cloth. Do not use abrasive cleaners or cleaning products containing ammonia, bleach or acid. If accidentally used, rinse the surface as soon as possible to prevent damage to the finish (peeling or corrosion). After cleaning the polished finishes, rinse thoroughly and wipe dry with a soft cloth.

Clean stainless steel surfaces at least once a week. When applying stainless steel cleaner or polish to stainless steel hardware, work with (not across) the grain. Never use an abrasive sponge or cloth, steel wool or wired brush as these may permanently scratch the surfaces.

NOTE: To maximize the life of your door, it is important to regularly inspect the glass and all hardware for misalignment, proper attachment, and/or damage. Contact DreamLine® with any questions or concerns.

DreamLine® shower doors and enclosures are designed not to leak when installed properly and the flow of water is not pointed directly at the hinges or vinyl seals.

© DreamLine
All Rights Reserved

© DreamLine
All Rights Reserved



© DreamLine
All Rights Reserved

TEL: 866-731-2244
FAX: 866-857-3638
DREAMLINE.COM

For more information on DreamLine® Shower Doors and Enclosures please visit **DreamLine.com**