



Brushed Gold Hardware Finish Shower Door

SAPPHIRE-V

Specification Features

- SEMI-FRAMELESS SLIDING BYPASS SHOWER DOOR
- CONVENIENT DUAL TOWEL BARS
- SLEEK ROLLERS FOR SMOOTH GLIDING ACTION
- UP TO 4 IN. OF ADJUSTMENT FOR WIDTH, IF NEEDED
- UP TO 1/4 IN. FOR OUT-OF-PLUMB (UNEVEN WALLS)
- 5/16 IN. (8 MM) THICK CERTIFIED CLEAR TEMPERED GLASS
- CLEARMAX WATER AND STAIN RESISTANT GLASS COATING


Technical Information

- Model: Sapphire-V
- Product Type: Sliding Bypass Shower Door
- Dimensions: 56-60 in. W x 76 in. H
- Access Width Max: 28 1/4 in.
- Access Width Min: 24 1/4 in.
- Threshold Width Min: 2 3/4 in.
- Glass Thickness: 5/16 in. (8 mm)
- Glass Type: Clear Glass
- Glass Coating: ClearMax

Codes/Standards Applicable


- ANSI Z97.1 (Tempered Glass)
- 16 CFR Part 1201

Hardware Finish Options:

-  01 - Chrome
-  04 - Brushed Nickel
-  06 - Oil Rubbed Bronze
-  09 - Matte Black
-  05 - Brushed Gold

Model SKU#s:

- SDVH60W760VXX01
- SDVH60W760VXX04
- SDVH60W760VXX06
- SDVH60W760VXX09
- SDVH60W760VXX05

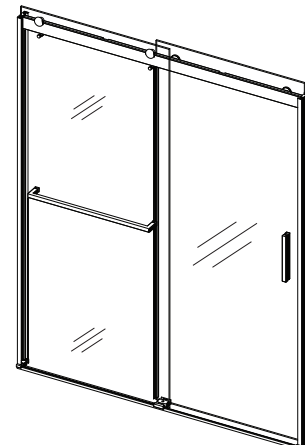

Available Product Configurations:

Shower Door SKU#s:

Clear Glass

SDVH60W760VXXXX

SDVH54W760VXXXX


SDVH48W760VXXXX

Gray Glass

SDVH60W760VXGXX

SDVH54W760VXGXX

SDVH48W760VXGXX




Tub Door SKU#s:

Clear Glass

TDVH60W620VXXXX

Gray Glass

TDVH60W620VXGXX



Important Notes:

If this unit is going to be installed in a new construction, please, install all of the required plumbing and drainage before installing the shower. Use a competent and licensed plumber for all plumbing installation period.

Drilling into the threshold is required for installation of this product and professional installation is recommended.

Top and bottom guiderails can be trimmed up to 4 in. for width adjustment; Wall profiles accommodate up to 1/4 in. for out-of-plumb (uneven walls).

Minimum threshold depth of 2 3/4 in. is required for proper installation.

Important Disclaimers:

- Prior to installation, please ensure that the installation surface is finished, level and solid and will be able to support the total weight of the unit. Also, make sure that the walls are plumb. Irregular installation, surface level or out of square conditions can result in serious problems for your installation.
- Please read Installation Manual thoroughly prior to installing this product.
- Please note that you should consult your local building codes with questions on installation compliance standards. Building and plumbing codes may vary by location, and DreamLine® is not responsible for code compliance standards for your project and will not accept any returns.

For commercial customers, we strongly recommend the use of Dreamline's Onsite Contractor Support option.

Dreamline's commercial warranty does not apply to damage or losses resulting from (i) other than normal and proper use and normal service conditions; (ii) improper installation, (iii) installation in or upon an unsuitable surface or areas; (iv) abuse, (v) accident, (vi) alteration, (vii) misuse, (viii) neglect, (ix) unauthorized repair or the failure to utilize suitably qualified and trained persons to perform service and/or repair of the Product, (x) improper maintenance, (xi) failure to follow installation, operating, cleaning or maintenance instructions, and (xii) use of "non-authorized" parts.