



## ESSENCE-H

### Specification Features

- DOUBLE SLIDING DESIGN FOR EASY ACCESS FROM EITHER SIDE
- ELEGANT DESIGN WITH A STRIKING SILHOUETTE
- REVERSIBLE FOR RIGHT OR LEFT DOOR INSTALLATION
- UP TO 1/4 IN. FOR OUT-OF-PLUMB (UNEVEN) WALLS
- UP TO 4 IN. FOR WIDTH ADJUSTMENT
- 5/16 IN. (8 MM) THICK CERTIFIED TEMPERED GLASS
- CLEARMAX WATER /STAIN RESISTANT GLASS COATING




### Technical Information

- |                        |                         |
|------------------------|-------------------------|
| • Model:               | Essence-H               |
| • Door Type:           | Bypass Sliding Tub Door |
| • Dimensions:          | 60"W x 60"H             |
| • Product Width Max:   | 60"                     |
| • Product Width Min:   | 56"                     |
| • Access Width Max:    | 27 1/4"                 |
| • Access Width Min:    | 23 1/4"                 |
| • Access Height Max:   | 55 1/4"                 |
| • Threshold Width Min: | 2 3/4"                  |
| • Glass Thickness:     | 5/16" [8 mm]            |
| • Glass Type:          | Clear or Gray Glass     |
| • Glass Coating:       | ClearMax                |

### Codes/Standards Applicable


- ANSI Z97.1 (Tempered Glass)
- 16 CFR Part 1201

### Hardware Finish Options:



- |   |                     |
|---|---------------------|
|  | 01 - Chrome         |
|  | 04 - Brushed Nickel |
|  | 09 - Matte Black    |

### Model SKU#s:

- TDEH60W600XXX01
- TDEH60W600XXX04
- TDEH60W600XXX09

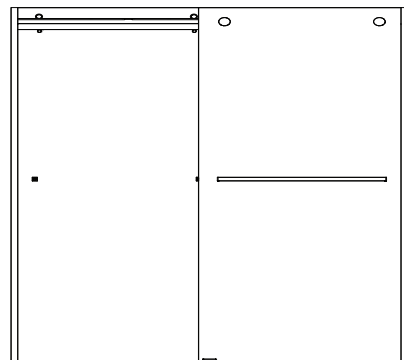

## Available Product Configurations:

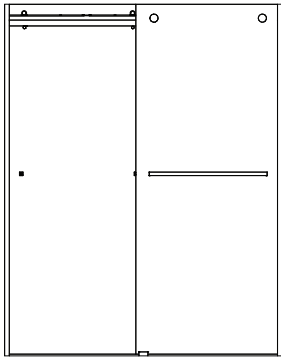

### Shower Door Model #s:

SHDR-634876H-01 SHDR-636076H-01  
SHDR-634876H-04 SHDR-636076H-04  
SHDR-634876H-09 SHDR-636076H-09  
SHDR-634876HG01 SHDR-636076HG01  
SHDR-634876HG04 SHDR-636076HG04  
SHDR-634876HG09 SHDR-636076HG09

### Tub Door Model #s:

TDEH60W600XXX01  
TDEH60W600XXX04  
TDEH60W600XXX09

## Important Notes:

If this unit is going to be installed in a new construction, please, install all of the required plumbing and drainage before installing the shower. Use a competent and licensed plumber for all plumbing installation period.

Minimum threshold depth of 2 3/4 in. is required for proper installation.

Wall profiles accommodate up to 1/4 in. for out-of-plumb (uneven) walls.

Up to 4 in. of adjustment for width, if needed.

Professional installation recommended.

DO NOT attach the handle to the door glass until instructed in the installation manual. DO NOT use the handle to lift the glass during installation. This may result in damage to the glass and/or serious injury.

## Important Disclaimers:

- Prior to installation, please ensure that the installation surface is finished, level and solid and will be able to support the total weight of the unit. Also, make sure that the walls are plumb. Irregular installation, surface level or out of square conditions can result in serious problems for your installation.
- Please read Installation Manual thoroughly prior to installing this product.
- Please note that you should consult your local building codes with questions on installation compliance standards. Building and plumbing codes may vary by location, and DreamLine® is not responsible for code compliance standards for your project and will not accept any returns.

For commercial customers, we strongly recommend the use of Dreamline's Onsite Contractor Support option.

Dreamline's commercial warranty does not apply to damage or losses resulting from (i) other than normal and proper use and normal service conditions; (ii) improper installation, (iii) installation in or upon an unsuitable surface or areas; (iv) abuse, (v) accident, (vi) alteration, (vii) misuse, (viii) neglect, (ix) unauthorized repair or the failure to utilize suitably qualified and trained persons to perform service and/or repair of the Product, (x) improper maintenance, (xi) failure to follow installation, operating, cleaning or maintenance instructions, and (xii) use of "non-authorized" parts.