



UNIDOOR TOULON

Specification Features

- FRAMELESS SWING SHOWER ENCLOSURE. JETGLAZE DURABLE PAINT
- PATTERN IS CREATED WITHOUT METAL FRAMING FOR EASY MAINTENANCE
- CONFIGURATION: SWING DOOR WITH FIXED PANEL, RETURN PANEL
- REVERSIBLE FOR A RIGHT OR LEFT DOOR OPENING
- SOLID BRASS WALL-TO-GLASS SELF-CLOSING HINGES
- 1/2 IN. DEPTH OR OUT-OF-PLUMB ADJUSTMENT
- 3/8 IN. (10 MM) THICK CERTIFIED CLEAR TEMPERED GLASS
- CLEARMAX WATER AND STAIN RESISTANT GLASS COATING

Technical Information

- Model: Unidoor Toulon
- Product Type: Swing Shower Enclosure
- Dimensions: 34 3/8 D x 57 7/8 W x 72 H
- Access Width Max: 27 in.
- Access Width Min: 27 in.
- Threshold Width Min: 5/8 in.
- Glass Thickness: 3/8 in. (10 mm)
- Glass Pattern: Toulon
- Glass Coating: ClearMax

Codes/Standards Applicable


- ANSI Z97.1 (Tempered Glass)
- 16 CFR Part 1201

Hardware Finish Option:

■ 89 - Matte Black

Model SKU#s:

SHEN-2434580-89

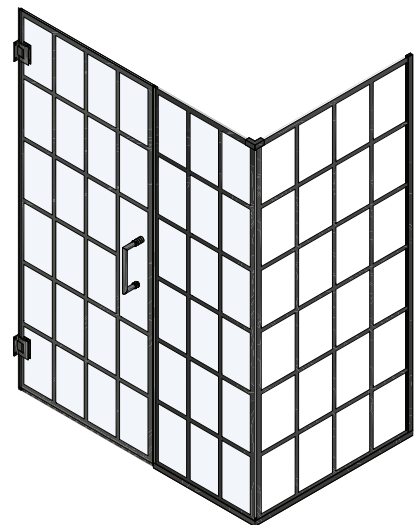

Right-hand return panel shown

Unique Product Design Details:



Unidoor Toulon Glass Pattern

Unidoor Door Handle



Black Satin
Wall to Glass Hinge

Important Notes:

If this unit is going to be installed in a new construction, please, install all of the required plumbing and drainage before installing the shower. Use a competent and licensed plumber for all plumbing installation period.

Wall studs or other reinforcement behind finished walls required for hinge installation.

Return panel attaches to the wall with an anodized aluminum U-channel; 1/2 in. depth or out-of-plumb adjustment available on Return panel only.

Minimum threshold depth of 5/8 in. is required for proper installation.

Professional installation recommended.

IMPORTANT! All measurements should be taken only **AFTER** walls are finished (tile, back walls, etc.).

Important Disclaimers:

- Prior to installation, please ensure that the installation surface is finished, level and solid and will be able to support the total weight of the unit. Also, make sure that the walls are plumb. Irregular installation, surface level or out of square conditions can result in serious problems for your installation.
- Please read Installation Manual thoroughly prior to installing this product.
- Please note that you should consult your local building codes with questions on installation compliance standards. Building and plumbing codes may vary by location, and DreamLine® is not responsible for code compliance standards for your project and will not accept any returns.

For commercial customers, we strongly recommend the use of Dreamline's Onsite Contractor Support option.

Dreamline's commercial warranty does not apply to damage or losses resulting from (i) other than normal and proper use and normal service conditions; (ii) improper installation, (iii) installation in or upon an unsuitable surface or areas; (iv) abuse, (v) accident, (vi) alteration, (vii) misuse, (viii) neglect, (ix) unauthorized repair or the failure to utilize suitably qualified and trained persons to perform service and/or repair of the Product, (x) improper maintenance, (xi) failure to follow installation, operating, cleaning or maintenance instructions, and (xii) use of "non-authorized" parts.