



VISIONS

### Specification Features

- VISIONS DOOR, Q-WALL BACKWALLS, AND SLIMLINE BASE
- CENTER-OPENING DUAL SLIDING DOOR DESIGN
- UP TO 1 IN. ADJUSTMENT PER SIDE FOR OUT-OF-PLUMB
- UPPER AND LOWER GUIDE RAILS CAN BE TRIMMED UP TO 4 IN.
- 1/4 IN. (6MM) THICK CERTIFIED CLEAR TEMPERED GLASS
- SLIMLINE SHOWER BASE: LOW PROFILE THRESHOLD DESIGN
- BACKWALL: ATTRACTIVE TILE PATTERN FOR A MODERN LOOK
- 2 CONVENIENT GLASS SHELVES



### Technical Information

- Model: Visions
- Product Type: Sliding Shower Door
- Kit Dimensions: 60 in. W x 34 in. D x 76 3/4 in. H
- Access Width: 22 7/8 - 26 7/8 in.
- Glass Thickness: 1/4 in. (6mm)
- Glass Type: Clear
- Glass Coating: ClearMax
- Base Color: White
- BackWalls Color: White

### Codes/Standards Applicable


- ANSI Z97.1 (Tempered Glass)
- 16 CFR Part 1201

### Hardware Finish Options:

-  01 - Chrome
-  04 - Brushed Nickel


### Model SKU#s:

- DL-6114C-01CL Center Drain Base Kit
- DL-6114C-04CL Center Drain Base Kit
- DL-6114L-01CL Left Drain Base Kit
- DL-6114L-04CL Left Drain Base Kit
- DL-6114R-01CL Right Drain Base Kit
- DL-6114R-04CL Right Drain Base Kit

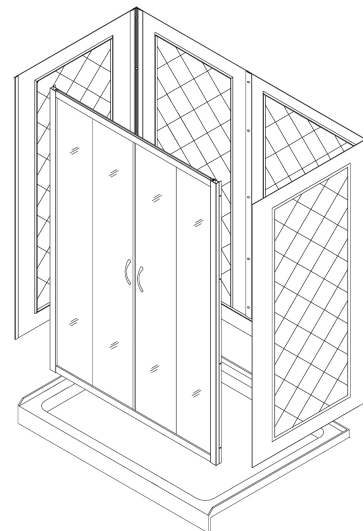

## Unique Product Design Details:


## Important Notes:

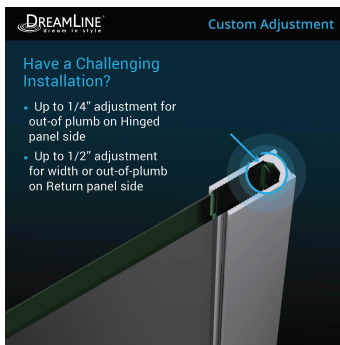

Custom Adjustment



Shower Door Handle



DreamLine exclusive ClearMax water and stain resistant glass coating

If this unit is going to be installed in a new construction, please, install all of the required plumbing and drainage before installing the shower. Use a competent and licensed plumber for all plumbing installation period.

Wall profiles allow up to 1 in. adjustment per side for out-of-plumb (uneven walls). Upper and lower guide rails can be trimmed up to 4 in. for width adjustment.

Shower Base: Drain opening fits any standard 2 in. compression fitted drain; Drain not included.

Professional installation recommended.

**IMPORTANT!** All measurements should be taken only AFTER walls are finished (tile, back walls, etc.).

## Important Disclaimers:

- Prior to installation, please ensure that the installation surface is finished, level and solid and will be able to support the total weight of the unit. Also, make sure that the walls are plumb. Irregular installation, surface level or out of square conditions can result in serious problems for your installation.
- Please read Installation Manual thoroughly prior to installing this product.
- Please note that you should consult your local building codes with questions on installation compliance standards. Building and plumbing codes may vary by location, and DreamLine® is not responsible for code compliance standards for your project and will not accept any returns.

For commercial customers, we strongly recommend the use of Dreamline's Onsite Contractor Support option.

Dreamline's commercial warranty does not apply to damage or losses resulting from (i) other than normal and proper use and normal service conditions; (ii) improper installation, (iii) installation in or upon an unsuitable surface or areas; (iv) abuse, (v) accident, (vi) alteration, (vii) misuse, (viii) neglect, (ix) unauthorized repair or the failure to utilize suitably qualified and trained persons to perform service and/or repair of the Product, (x) improper maintenance, (xi) failure to follow installation, operating, cleaning or maintenance instructions, and (xii) use of "non-authorized" parts.