



ELEGANCE PLUS

Specification Features

- SWING DOOR & INLINE PANEL. FRAMELESS DESIGN
- SOLID BRASS SELF-CLOSING PIVOT HARDWARE
- UP TO 1/4 IN. ADJUSTMENT FOR OUT-OF-PLUMB
- 3/8 IN. (10 MM) THICK CERTIFIED TEMPERED GLASS
- REVERSIBLE FOR RIGHT OR LEFT DOOR INSTALLATION
- CLEARMAX WATER /STAIN RESISTANT GLASS COATING
- SMOOTH AND QUIET OPERATION

Technical Information

- | | |
|------------------------|-------------------|
| • Model: | Elegance Plus |
| • Door Type: | Pivot Shower Door |
| • Dimensions: | 52 1/2"W x 72"H |
| • Product Width Max: | 52 1/2" |
| • Product Width Min: | 51 3/4" |
| • Access Width Max: | 25 3/8" |
| • Access Width Min: | 25 3/8" |
| • Access Height Max: | -- |
| • Threshold Width Min: | 3/4" |
| • Glass Thickness: | 3/8" [10 mm] |
| • Glass Type: | Clear |
| • Glass Coating: | ClearMax |

Codes/Standards Applicable


- ANSI Z97.1 (Tempered Glass)
- 16 CFR Part 1201

Hardware Finish Options:

- | | |
|---|------------------------|
|  | 01 - Chrome |
|  | 04 - Brushed Nickel |
|  | 06 - Oil Rubbed Bronze |
|  | 09 - Matte Black |

Model SKU#s:

- | | |
|-----------------|-----------------|
| SHDR-4452225-01 | SHDR-4452225-06 |
| SHDR-4452225-04 | SHDR-4452225-09 |

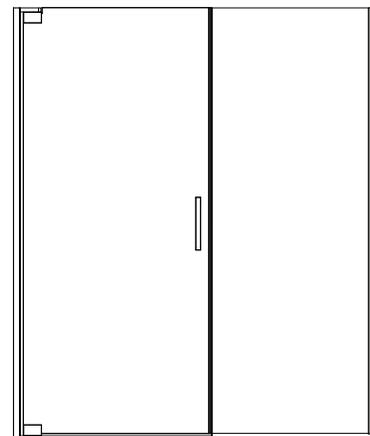

Unique Product Design Details:



Door Top Pivot



Shower Door Handle

Important Notes:

If this unit is going to be installed in a new construction, please, install all of the required plumbing and drainage before installing the shower. Use a competent and licensed plumber for all plumbing installation period.

Install this product according to the installation manual. Professional installation is recommended.

Minimum threshold depth of 3/4 in. is required for proper installation.

Up to 1/4 in. adjustment for out-of-plumb (uneven walls).

Up to 1/2 in. adjustment for out-of-plumb on Inline Panel side.

DO NOT attach the handle to the door glass until instructed in the installation manual. DO NOT use the handle to lift the glass during installation. This may result in damage to the glass and/or serious injury.

Matching DreamLine SlimLine Base: DLT-1132540, DLT-1134540, or DLT-1136540 (sold separately) in choice of White, Biscuit or Black.

Important Disclaimers:

- Prior to installation, please ensure that the installation surface is finished, level and solid and will be able to support the total weight of the unit. Also, make sure that the walls are plumb. Irregular installation, surface level or out of square conditions can result in serious problems for your installation.
- Please read Installation Manual thoroughly prior to installing this product.
- Please note that you should consult your local building codes with questions on installation compliance standards. Building and plumbing codes may vary by location, and DreamLine® is not responsible for code compliance standards for your project and will not accept any returns.

For commercial customers, we strongly recommend the use of Dreamline's Onsite Contractor Support option.

Dreamline's commercial warranty does not apply to damage or losses resulting from (i) other than normal and proper use and normal service conditions; (ii) improper installation, (iii) installation in or upon an unsuitable surface or areas; (iv) abuse, (v) accident, (vi) alteration, (vii) misuse, (viii) neglect, (ix) unauthorized repair or the failure to utilize suitably qualified and trained persons to perform service and/or repair of the Product, (x) improper maintenance, (xi) failure to follow installation, operating, cleaning or maintenance instructions, and (xii) use of "non-authorized" parts.