



SYMMONS®

Location: Temptrol® Commercial




C-96-1-X, C-96-1-TRM & C961TRMTC

Shower System & Trim

Specification Submittal

Model Numbers	Feature Highlights
☐ C-96-1-X Shower System with Temptrol Pressure Balancing Shower Valve ☐ C-96-1-TRM Shower Trim, Temptrol Pressure Balancing Shower Valve ordered separately ☐ C961TRMTC Shower Trim with TA-10 flow control spindle and T-12A cap assembly, must order Temptrol valve with Test Cap	• Temptrol Commercial Shower System or Trim • Requires Temptrol® Pressure Balancing Shower Valve (included with C-96-1-X) • Integral service stops allow water shutoff at valve for service (included with C-96-1-X) • Adjustable stop screw to limit hand turn (included with C-96-1-X) • Metal lever handle • 1 mode showerhead • 2.0 gpm (7.6 L/min) flow restrictor • Tub spout not included • Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish • Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n C961TRMTC)
Options/Modifications	Compliance
☐ VP Vandal resistant escutcheon screws in place of standard screws ☐ X-CHKS Integral check stops - for use in installations where a positive shutoff device is used downstream of mixing valve ☐ Delete Suffix X Less integral service stops ☐ L/HD Shower head not included Includes showerhead arm and flange only ☐ L/HDL Handle not included Includes showerhead arm and flange only ☐ L1 Less showerhead ☐ L7 Less handle ☐ LP Loop handle	- ASME A112.18.1/CSA B125.1 - ASSE 1016
	Warranty Limited Lifetime - for residential installations. 10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.



Note: Append appropriate -suffix to model number.

Architectural/Engineering Specification


Symmons Temptrol and Commercial Shower System and Trim _____ Includes Temptrol Commercial Shower System or Trim, requires Temptrol® Pressure Balancing Shower Valve (included with C-96-1-X), integral service stops allow water shutoff at valve for service (included with C-96-1-X), adjustable stop screw to limit hand turn (included with C-96-1-X), metal lever handle, 1 mode showerhead, 2.0 gpm (7.6 L/min) flow restrictor, tub spout not included. Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish, available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n C961TRMTC). 10-Year Commercial Warranty. ASME A112.18.1/CSA B125.1, ASSE 1016 compliant. Available options: "VP - Vandal resistant escutcheon screws in place of standard screws", "X-CHKS - Integral check stops - for use in installations where a positive shutoff device is used downstream of mixing valve", "Delete Suffix X - Less integral service stops", "L/HD - Shower head not included Includes showerhead arm and flange only", "L/HDL - Handle not included Includes showerhead arm and flange only", "L1 - Less showerhead", "L7 - Less handle", "LP - Loop handle".



SYMMONS® Temptrol® Commercial

C-96-1-X, C-96-1-TRM & C961TRMTC

Dimensions

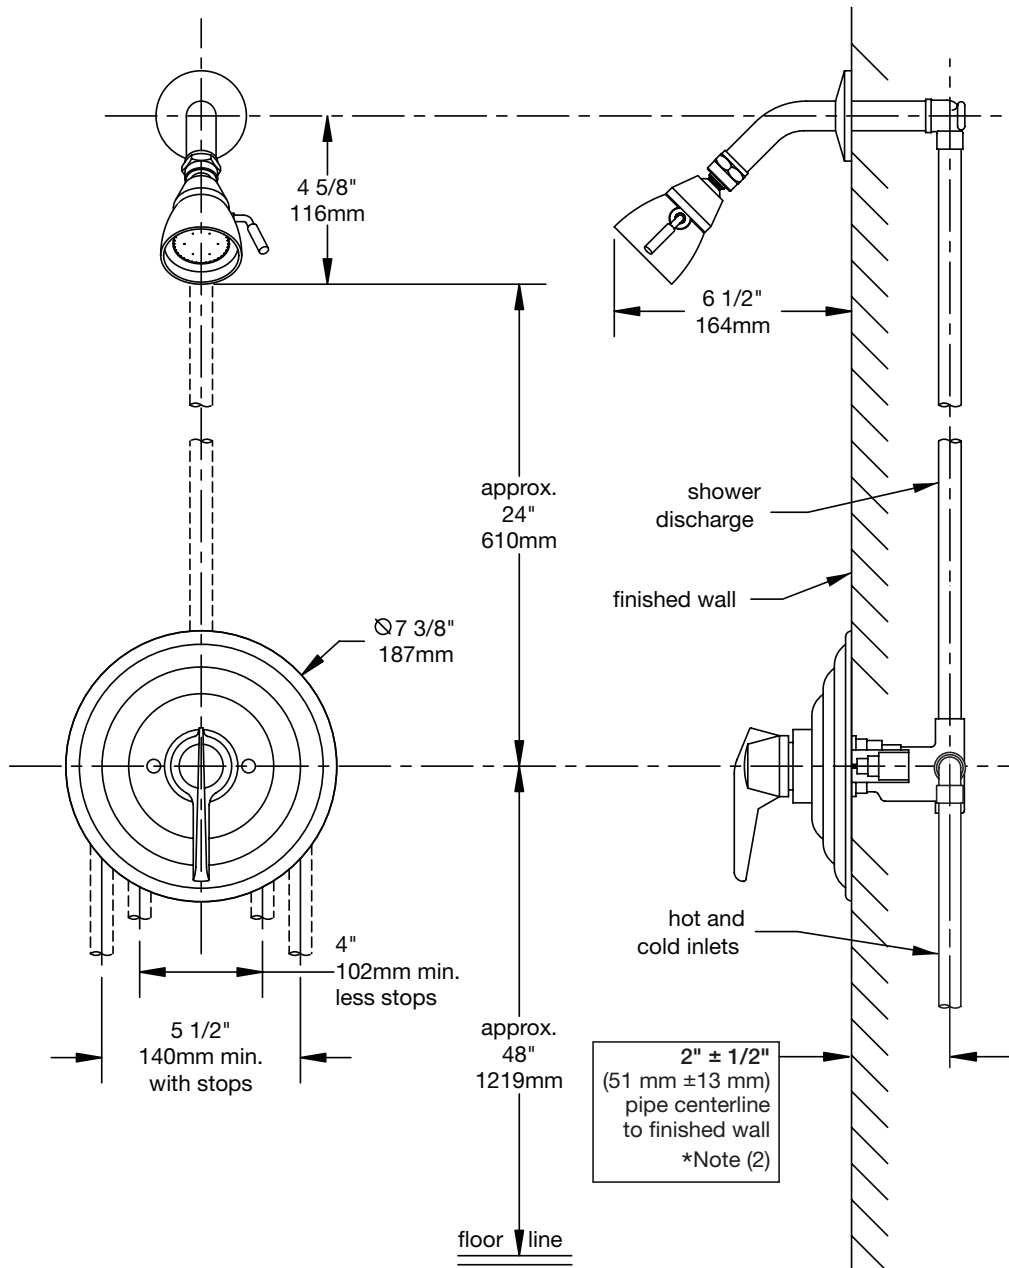

Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in.
- 4) Dimensions subject to change without notice.