



**XOS\_SC**  
WALL MOUNT HOOD

## HOW BEAUTIFUL KITCHENS BREATHE



**XOS\_SC**

- High-Velocity Blower
- Incomparable handcrafted Italian finish
- 3 speed electronic illuminated controls
- 5 Minute delay function


## DESIGNED AND CRAFTED IN ITALY

The XOS is a perfect example of Italian design and quality. Beautifully curved front with soft angles make this design a perfect choice without compromising performance.

At XO, we believe that a good design is something everyone can afford

WORLD CLASS SERVICE | COMPREHENSIVE WARRANTIES  
OUR LASTING COMMITMENT TO YOU



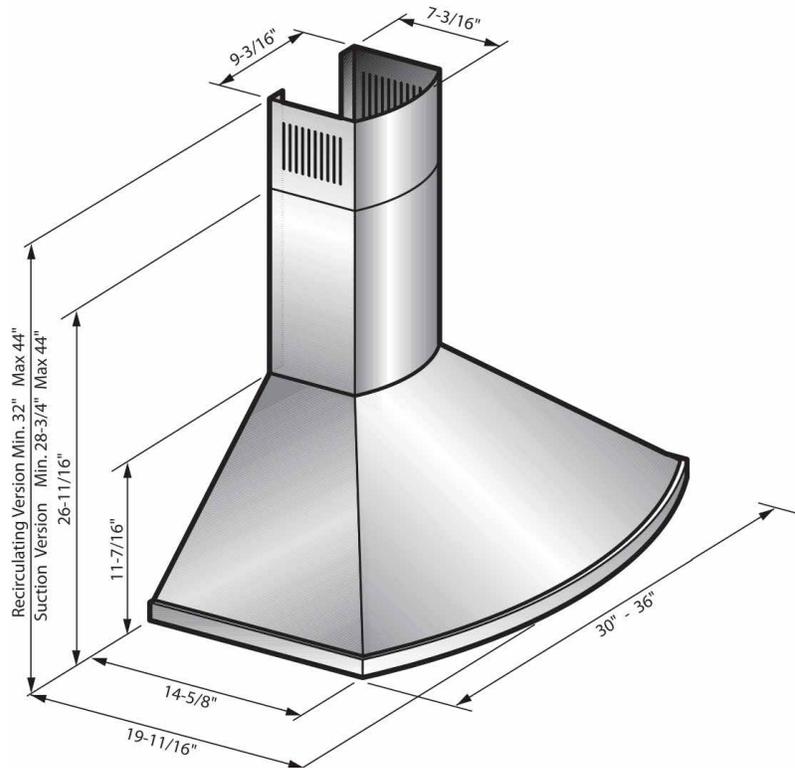

## FEATURES

**FINISH**

Stainless Steel

**FEATURES**

- Electronic Speed Control + Power Boost
- CCC Code Compliance Control - 395 or 600 CFM
- High Efficiency 3000k LED Lights (x2)
- Standard Chimney fits ceilings up to 9' tall
- Dishwasher Safe Aluminum Mesh Filter
- 6" Vertical Duct or Recirculating (Kit Sold Separately)  
(Recirculated air must be returned to the living space)
- 5 Minute Delay Shutoff Timer
- Made In Italy

## PERFORMANCE

SPEED	1	2	3	BOOST
CFM	160	250	395	600
SONES	1.0	2.5	4.0	6.5

## SPECIFICATIONS

**ELECTRICAL** 115VAC 60HZ 4.0 AMP

### DIMENSIONS

H MAX 44" - MIN 32" (Recirc)  
MIN 28 3/4" (Vented)

W 30" - 36"

D 19 11/16"

(Refer to the illustration above)

### MOUNTING HEIGHT

ABOVE COOKING 27" - 32"

### OPTIONS

Recirculation Kit

**XORFK05**

Recirculation Filters

**XORFRND**

Make Up Air Kit (6")

**XOMA06**

Duct Cover Extended

**XOEDCS2**

(For ceilings up to 10' tall)



## RECOMMENDED MOUNTING HEIGHT

All range hoods have a recommended range of installation height over the cooking surface. However cooking styles, types of cooking equipment and installation limitation can vary greatly. For installations outside the recommended range - consult XO.

THESE MODELS HAVE A 6" DIAMETER VERTICAL EXHAUST DUCT


## RECIRCULATION

These XOS models may be installed with an optional recirculation kit when venting outside is not practical. When used in recirculation mode the filtered exhaust is directed back into the living space through vents in the telescoping duct cover. These vents cannot be covered in the installation.

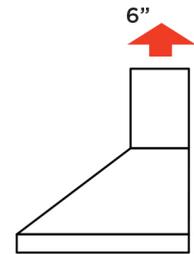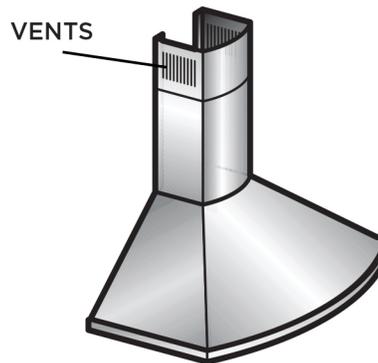

RECOMMENDED  
MOUNTING HEIGHT  
ABOVE  
COOKTOPS

27" to 32"

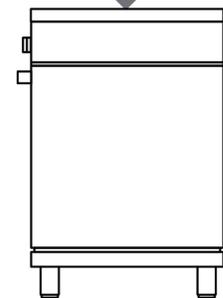

SIDE VIEW

## HOW DOES CODE COMPLIANCE CONTROL HELP -



**CODE COMPLIANCE CONTROL (CCC)** enables the installer to re-program the hood as it is being installed. **Your XO Hood is set to operate at 600 CFM maximum at the factory.**

Re-programming is accomplished quickly and requires no special tools or additional parts but once done, the air flow rate is limited to a maximum of 395 CFM below the 400 CFM cap that most local codes impose eliminating the need for additional controls.

Re-programming also disables the Power Boost function. After conversion, the installer affixes a label stating the unit has been converted to 395 CFM max. Once done, the unit cannot be changed back.

If your application calls for a make-up air solution, XO gives you more choices.