
ASSEMBLY INSTRUCTION


4-GLASS GLOBE PENDENT LIGHT A Light Body B Glass Shade C Tube Ø110*101mm 1pc 6pcs 4pcs **D** Ring Nut Cap Flat Washer Ø42*8mm Ø9*10mm Ø5/32"*12mm 4pcs 2pcs 2pcs **G** Ceiling Base Assist Connector Screw Ø16*60mm 38*17mm • 1pc 2pcs 2pcs J Bolt **Wire Connector** Wire Connector Ø5/32"*25mm Ø9.9*17.7mm Ø8.6*15.2mm 2pcs 2pcs 1pc M BULB(Not provided) N Helping Tool E12 4pcs 1pc

IMPORTANT SAFETY INSTRUCTIONS


THIS PENDANT LAMP HAS A POLARIZED PLUG (ONE BLADE IS WIDER THAN THE OTHER) AS A SAFETY FEATURE TO REDUCE THE RISK OF ELECTRIC SHOCK. THIS PLUG WILL FIT IN A POLARIZED OUTLET ONLY ONE WAY. IF THE PLUG DOES NOT FIT FULLY IN THE OUTLET, REVERSE THE PLUG. IF IT STILL DOES NOT FIT, CONTACT A QUALIFIED ELECTRICIAN. NEVER USE WITH AN EXTENSION CORD UNLESS PLUG CAN BE FULLY INSERTED. DO NOT ALTER THE PLUG.

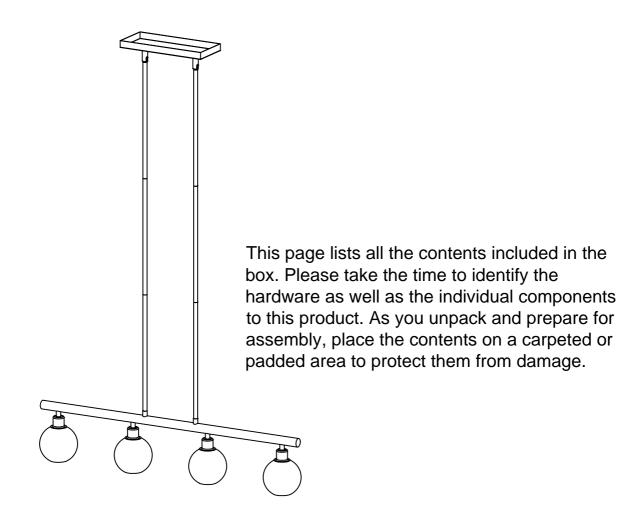

Remove Nut Cap (E) from Ceiling Base (G), and pull out the bracket from Ceiling Base (G). Pull out the cable from Light Body (A) to through all Tube (C) & Ceiling Base (G), then rotate all Tube (C), next assemble Tube (C) with Light Body (A) & Assist Connector (H). Finally assemble Assist Connector (H) to Ceiling Base (G) by Screw (I) to fix tightly.

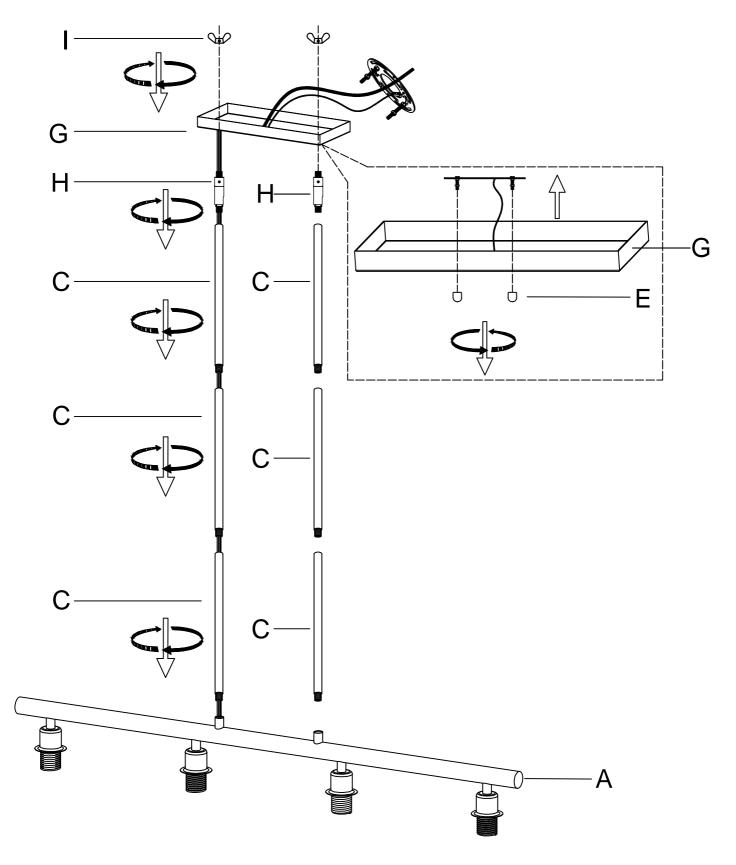


Firstly, connect the Wire Connection (K) & Wire Connection (L) together with wire and then fix the bracket on the ceiling with Bolt (J) and Flat Washer (F) by serewdriver. Secondly, put the Ceiling Base (G) back to cover the bracket and using Nut Cap (E) to fix them.

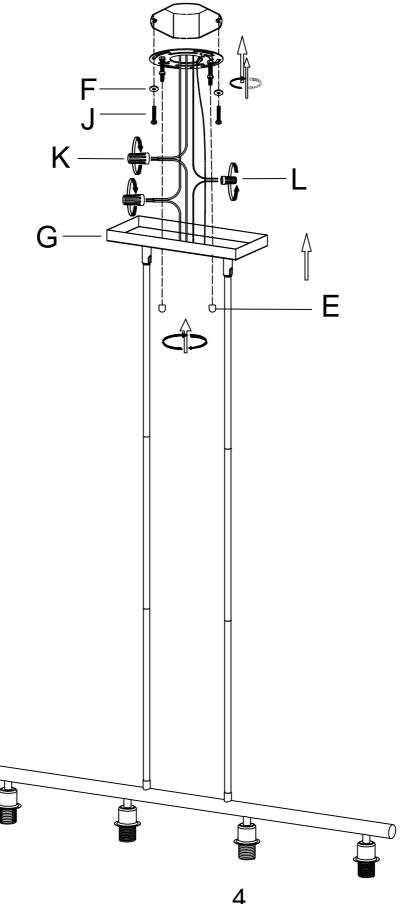

3

Put the Glass Shade (B) to the Light Body (A) using Ring (D) to tight by Helping Tool (N). Then, assemble the Bulb (M) to the lamp holder in the Glass Shade (B).

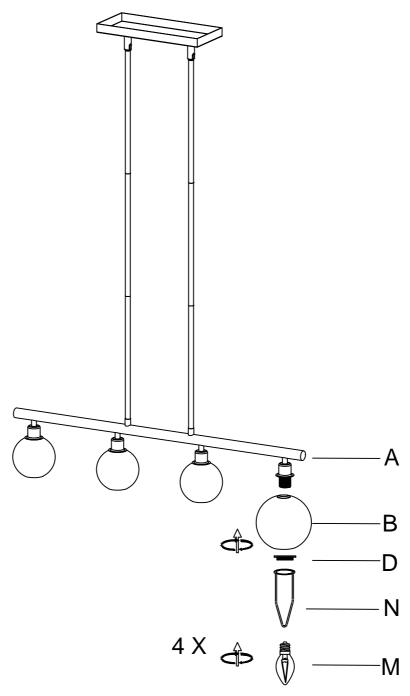

Cleaning & Care

Treat surface with care. Surface is resistant to scratches but is not scratch resistant. Clean surfaces with a dry or damp soft cloth. Do not use abrasive cleaners. Hardware may loosen over time. Periodically check that all connections are tight.