

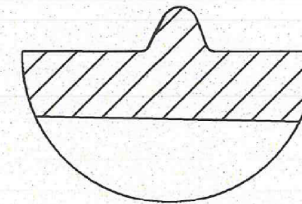


SECTION A-A

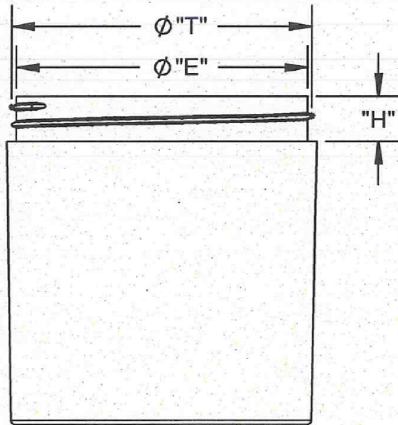

DETAIL B  
SCALE 5 : 1

THREAD DETAIL INFORMATION  
6 THREADS PER INCH, 0.167 PITCH,  
400° FULL DEPTH THREAD

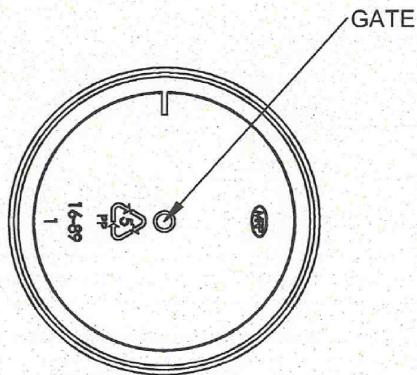

	TOLERANCE	UNITS	
<b>T</b>	± 0.010 [0.25]	in [mm]	3.485 [88.52]
<b>E</b>	± 0.010 [0.25]	in [mm]	3.381 [85.88]
<b>I</b>	± 0.010 [0.25]	in [mm]	3.230 [82.04]
<b>S</b>	± 0.010 [0.25]	in [mm]	0.095 [2.41]
<b>H</b>	± 0.010 [0.25]	in [mm]	0.530 [13.46]
<b>BOTTOM OD</b>	± 0.010 [0.25]	in [mm]	3.480 [88.39]
<b>OAH</b>	± 0.010 [0.25]	in [mm]	3.845 [97.66]
<b>PART WEIGHT</b>	±5.0	g	97.5
<b>VOLUME</b>	± 5%	cc	485

**DISCLAIMER**

THIS INFORMATION IS PROVIDED AS A GENERAL GUIDE, INCLUDING DIMENSIONS. IT IS THE CUSTOMER'S RESPONSIBILITIES TO SELECT THE PROPER CONTAINER FOR PRODUCT AND APPLICATION COMPATIBILITY.

DISTRIBUTED BY:



REF NO.:

DWG10339

DESCRIPTION:

16 oz PP Straight Sided Jar, 89-400, Thick Wall