
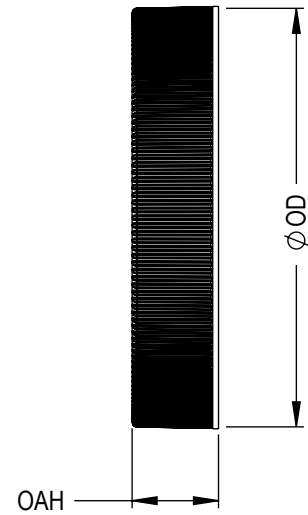
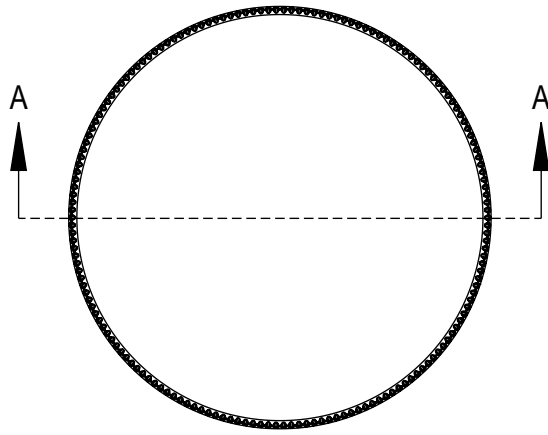


SECTION A-A

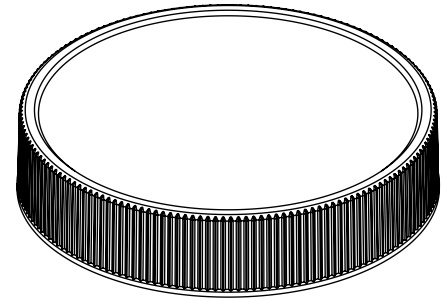

STATIC TORQUE RECOMMENDATION: 21-36 in-lbs
 REQUIREMENT MAY VARY DEPENDING UPON CONTAINER MATERIAL,
 NECK FINISH, AND CAPPING EQUIPMENT

THREAD DETAIL INFORMATION:	6 THREADS PER INCH	0.167" [4.24] PITCH	450° FULL DEPTH THREADS
REFERENCE	DIMENSION	TOLERANCE	UNITS
ØE	1.984 [50.39]	±0.015 [0.38]	in [mm]
ØT	2.078 [52.78]	±0.015 [0.38]	in [mm]
H	0.400 [10.16]	±0.010 [0.25]	in [mm]
OAH	0.455 [11.56]	±0.010 [0.25]	in [mm]
OD	2.195 [55.75]	±0.015 [0.38]	in [mm]
PART WEIGHT	4.90	± 0.75	g

DISTRIBUTED BY:



REF NO.:

DWG31476

DESCRIPTION:

53-400 PP Smooth Top, Ribbed Sides Cap, No Liner

DISCLAIMER

THIS INFORMATION IS PROVIDED AS A GENERAL GUIDE, INCLUDING DIMENSIONS. IT IS THE CUSTOMER'S RESPONSIBILITIES TO SELECT THE PROPER CONTAINER FOR PRODUCT AND APPLICATION COMPATIBILITY.