


LINEAR SERIES DIRECT VENT GAS APPLIANCE



Specifications

Model	BTU	Width		Height		Depth		Viewing Area
		Actual	Framing	Actual	Framing	Actual	Framing	
CL50N	30,000	65 5/16	65 13/16	41 3/16	73	17 11/16	17 15/16	52 3/4 X 18 5/8
CL50N2	30,000	65 5/16	65 13/16	41 3/16	73	16 3/16	16 3/16	52 3/4 X 18 5/8

Front Options

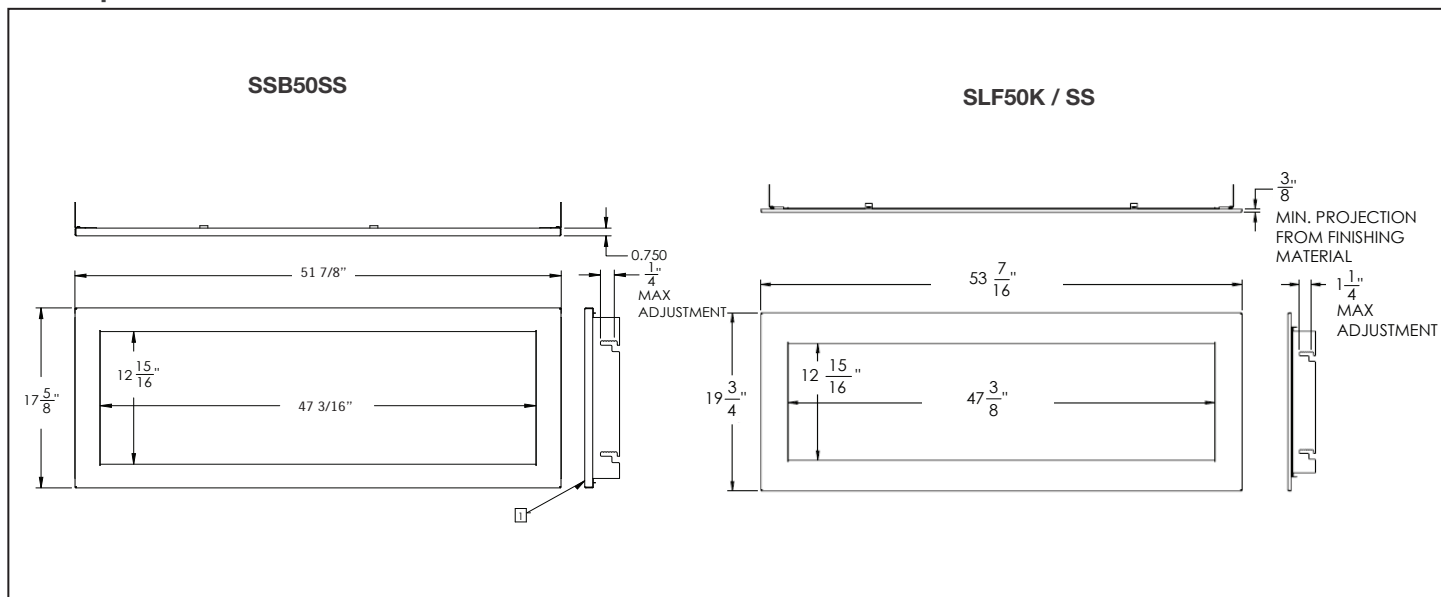

Framing Dimensions

single-sided

note:
Before framing the appliance, ensure to install the firestop first.

note:
The CL series requires a minimum enclosure height of 73" measured from the bottom of the appliance. For temperature requirements, this area must be left unobstructed. Some venting configurations that require more vertical rise will require a larger enclosure to provide minimum vertical clearance between vent pipes and combustibles. It is also recommended that the enclosure be ventilated at the top and bottom to circulate the hot air.

minimum framing

Ref	CL50
E	17 15/16" (45.6cm)
F	65 13/16" (167.2cm)
J	Optional - Appliance does not need to be elevated above floor
*L	73" (185.4cm)

see-thru

note:
Before framing the appliance, ensure to install the firestop first as it will not fit between the studs if installed after framing.

note:
The CL series requires a minimum enclosure height of 73" measured from the bottom of the appliance. For temperature requirements, this area must be left unobstructed. Some venting configurations that require more vertical rise will require a larger enclosure to provide minimum vertical clearance between vent pipes and combustibles. It is also recommended that the enclosure be ventilated at the top and bottom to circulate the hot air.

minimum framing

Ref	CL50
E	16 3/16" (41.1cm)
F	65 13/16" (167.2cm)
J	Optional - Appliance does not need to be elevated above floor
*L	73" (185.4cm)

* Minimum enclosure height may be higher depending on venting configuration (see minimum distance to combustibles).

Product information provided is not complete and is subject to change without notice. Please consult the installation manual for the most up to date installation information.


W415-1872 / A / 02.04.19

LINEAR SERIES DIRECT VENT GAS APPLIANCE




Product information provided is not complete and is subject to change without notice. Please consult the installation manual for the most up to date installation information.


Dimensions

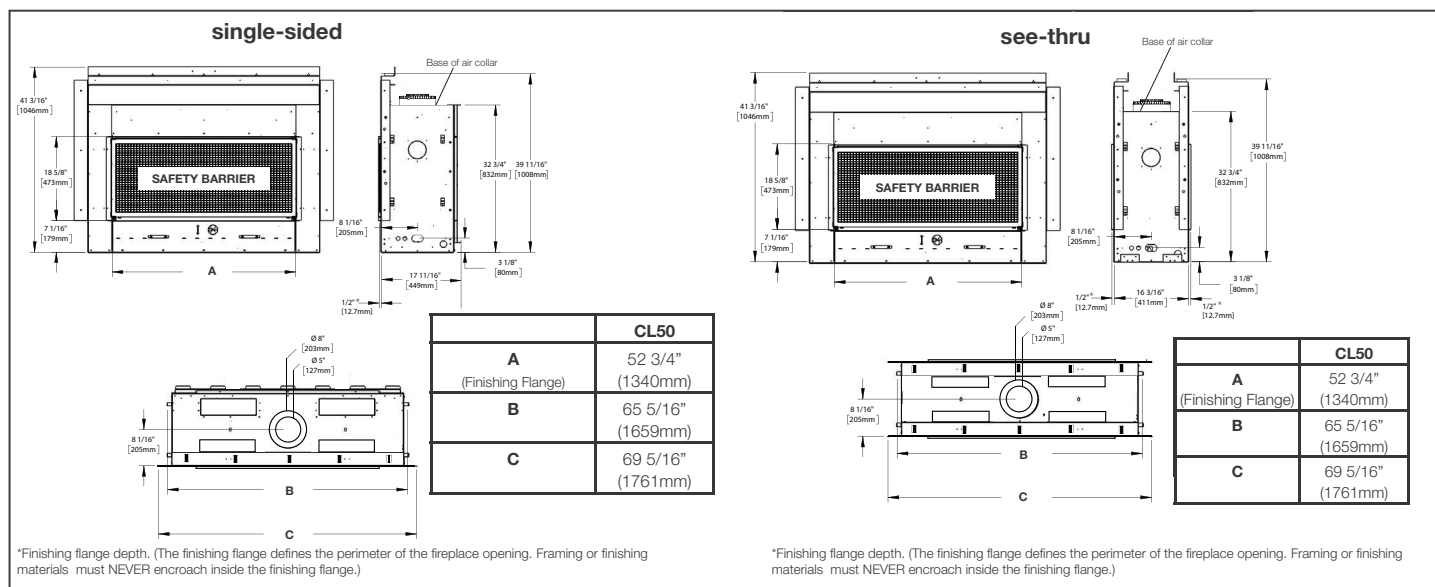


Wall Penetration

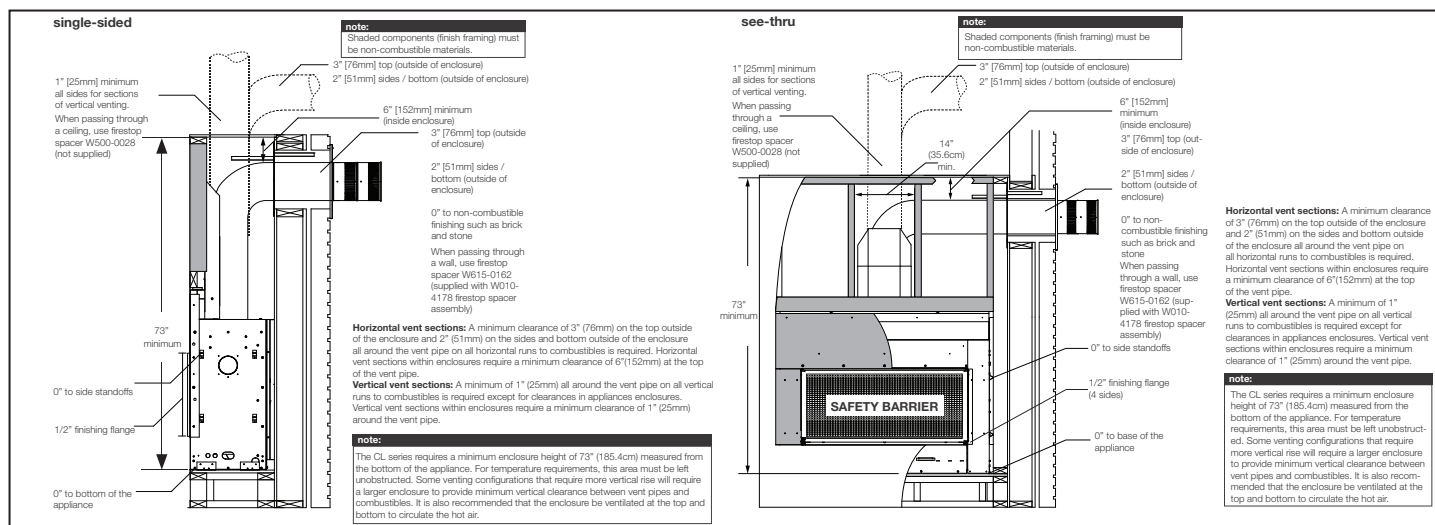

Combustible Mantel Clearances

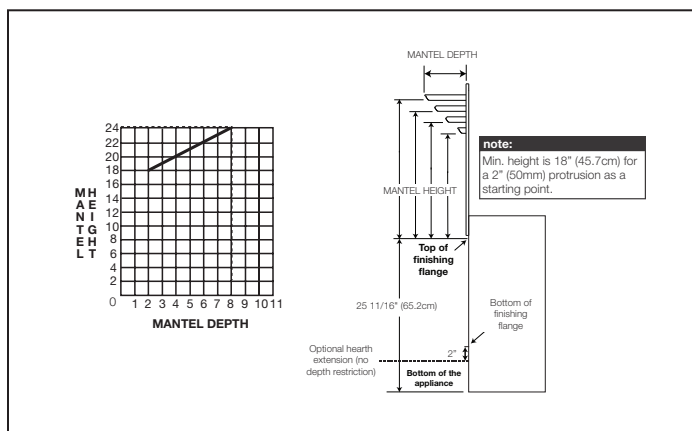

Appliance Location

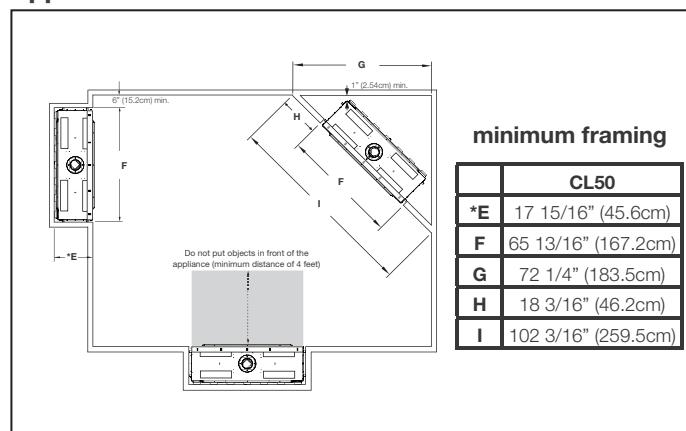

W415-1872 / A / 02.04.19


SÉRIE LINÉAIRE FOYER À GAZ D'ÉVACUATION DIRECTE




Spécifications

Modèle	BTU	Largeur		Hauteur		Profondeur		Dimensions de Visione
		Réel	Ossature	Réel	Ossature	Réel	Ossature	
CL50N	30,000	65 5/16	65 13/16	41 3/16	73	17 11/16	17 15/16	52 3/4 X 18 5/8
CL50N2	30,000	65 5/16	65 13/16	41 3/16	73	16 3/16	16 3/16	52 3/4 X 18 5/8

Façades Optionnel

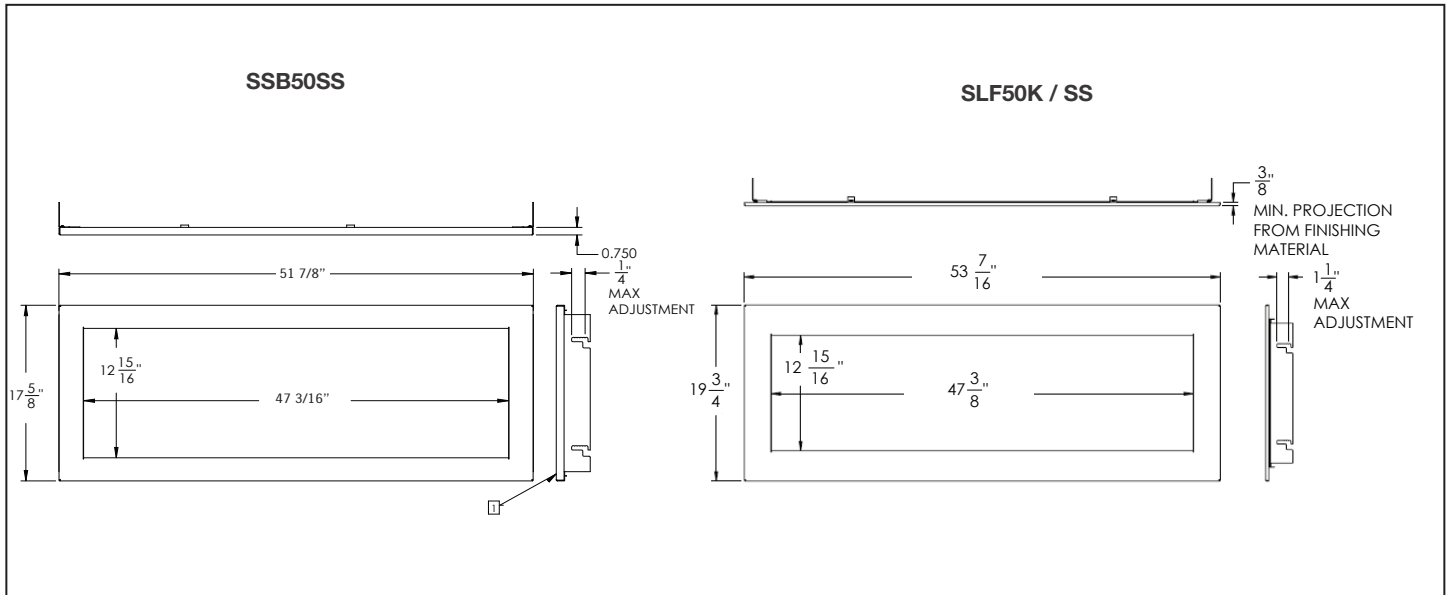

Dimensions d'ossature

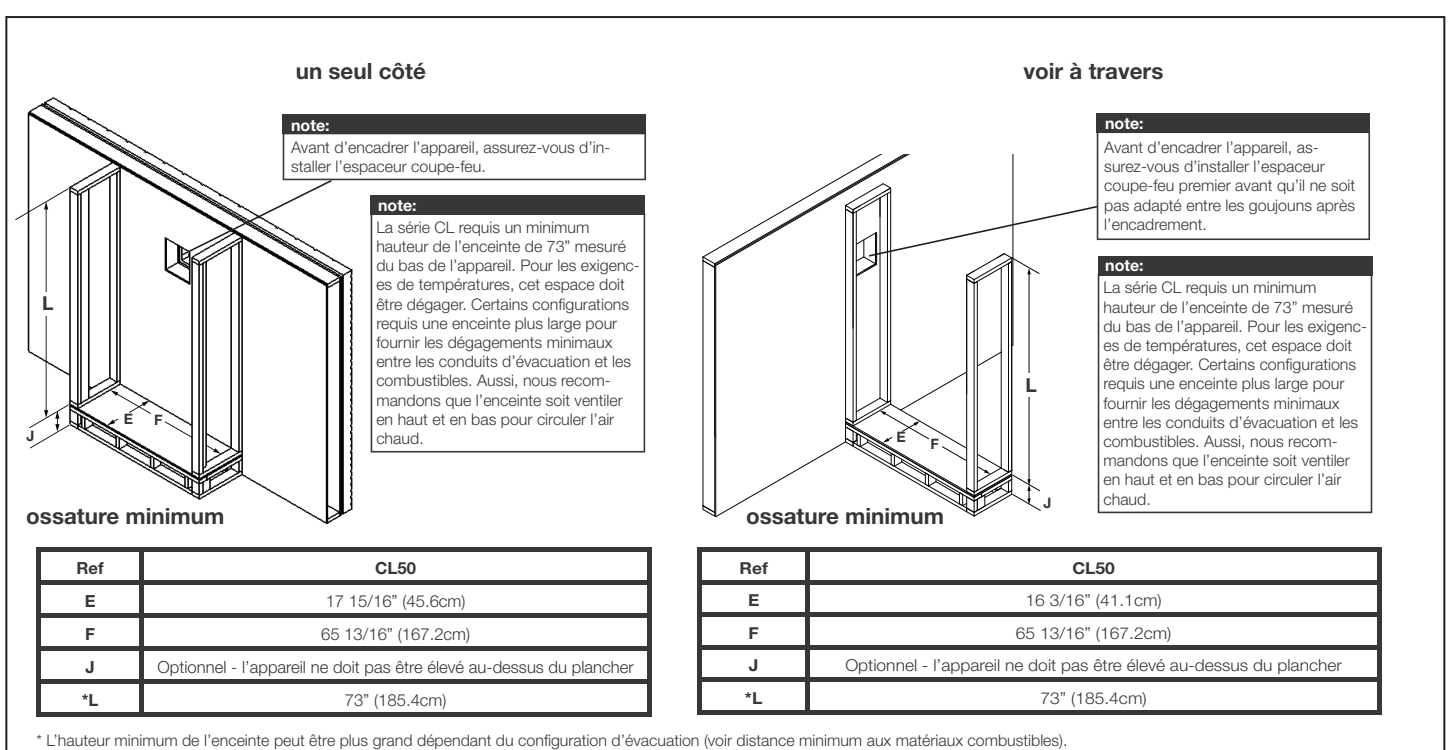

Information du produit fourni n'est pas complet et est sujet de changer sans préavis. Consultez le manuel d'installation pour information d'installation actuel.


W415-1872 / A / 02.04.19

SÉRIE LINÉAIRE FOYER À GAZ D'ÉVACUATION DIRECTE




Information du produit fourni n'est pas complet et est sujet de changer sans préavis. Consultez le manuel d'installation pour information d'installation actuel.


Dimensions

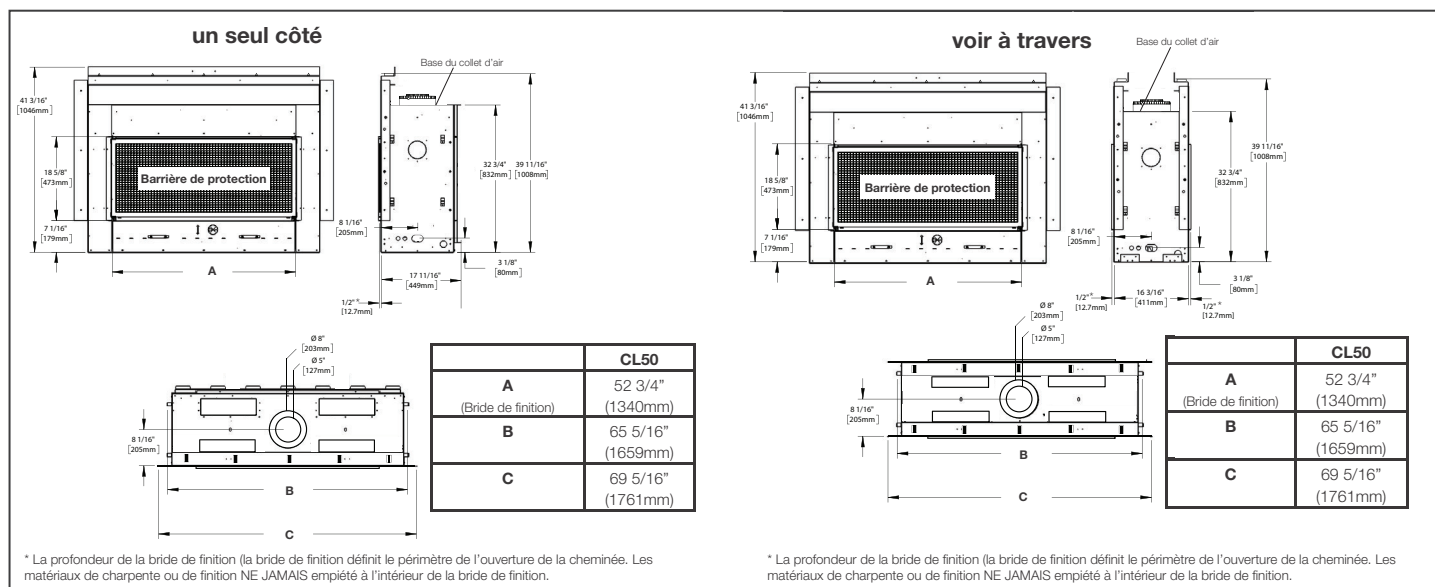


Passage d'un section dans un mur

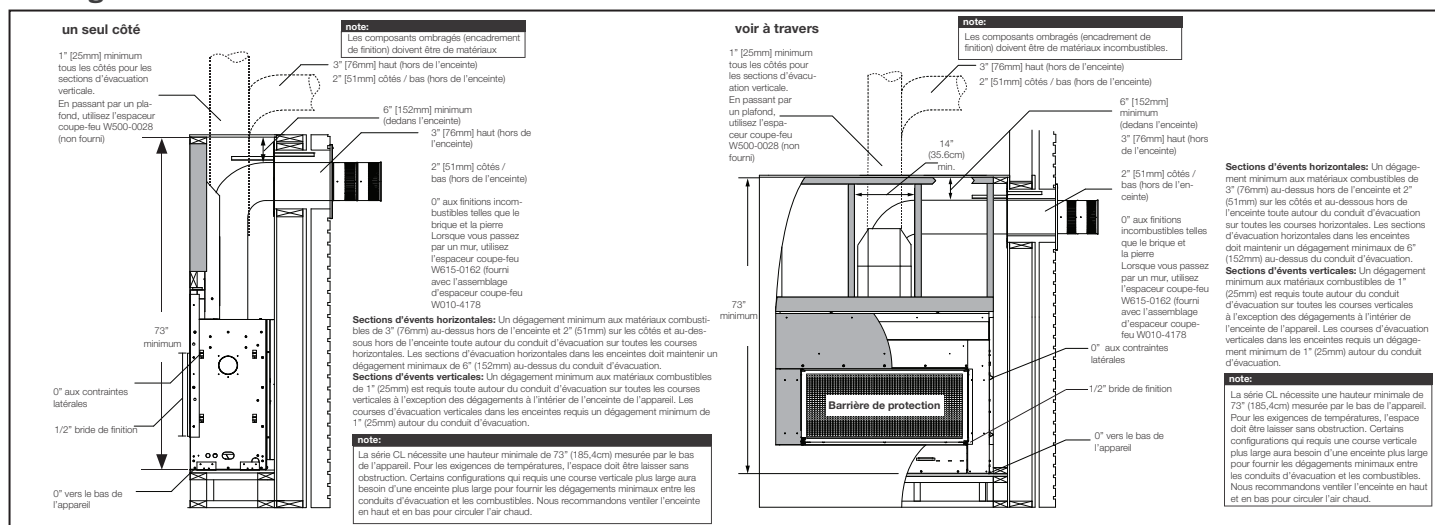

Dégagements Combustible de la Tablette

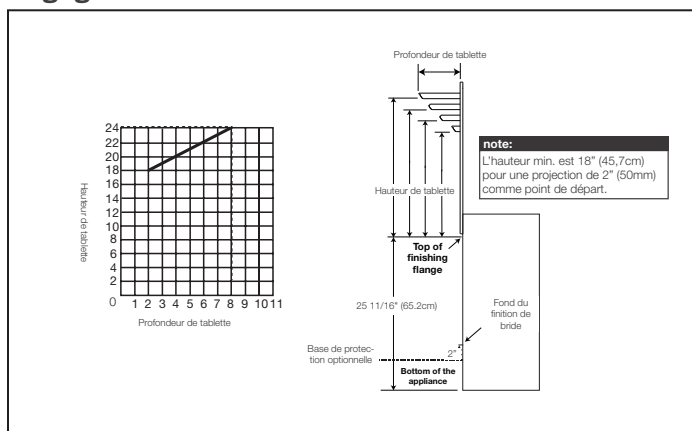

Location de l'appareil

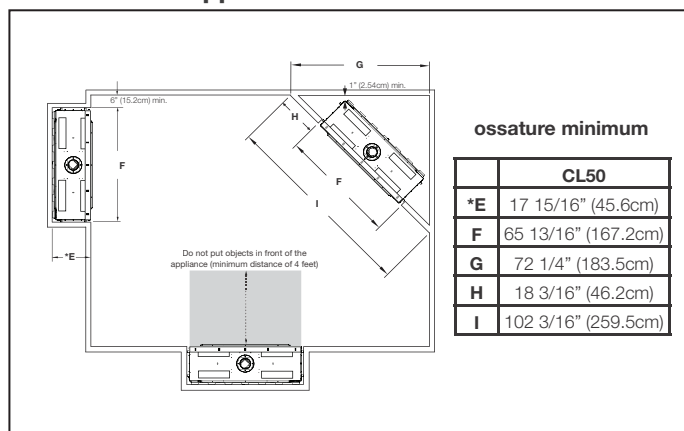

W415-1872 / A / 02.04.19