




TOP VIEW

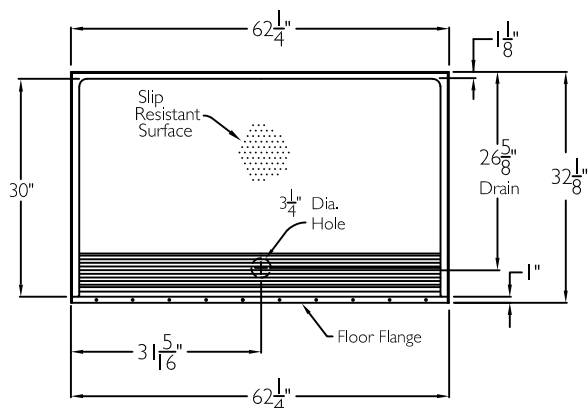

SPECIFICATION SHEET

This shower pan shall be Asura model SSB 6030 TR COL 1.0 Pan center. Finished surface shall be of a sanitary grade solid surface. Unit construction shall be of a molded reinforced fiberglass with a 15% minimum fiberglass content.


The unit shall have outside dimensions of 62 1/4" x 32 1/8" x 4 1/2", with a 1.0" change of level threshold. The unit shall meet ANSI Z124.1-2, CSA B45.5, and HUD-UM73.

HANDED BY THE CENTER


The enclosure shall be equipped with the following accessories:

- 1) Integral front trench drain molded into unit,
- 2) Integral perimeter flange along the top,
- 3) In-line forward facing mounting flanges at front,
- 4) Integral molded floor flange at the front,
- 5) Solid surface finish,
- 6) Aluminum trench grate,
- 7) Armor Core Easy Base,
- 8) 1.0" change of level threshold.

FRONT VIEW

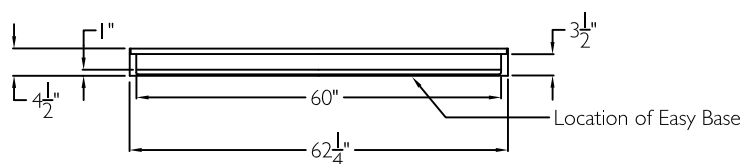


SIDE VIEW

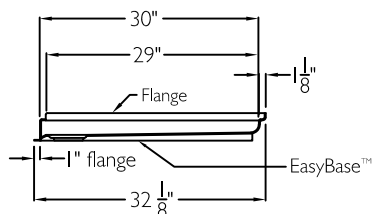

NOTE: WALLS ABOVE UNIT BY OTHERS, UNIT WILL COMPLY WITH ADA, AND ANSI A117.1 AS A ROLL-IN SHOWER IF CODE GRAB BARS, SEAT, VALVE PACKAGE WITH HAND SHOWER IS PROVIDED AND INSTALLED BY OTHERS.

CROSS SECTION OF SHOWER BASE

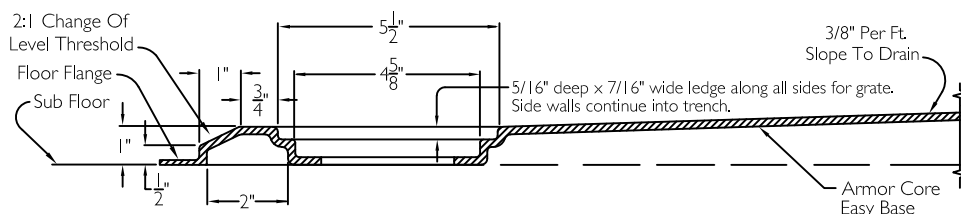

THIS UNIT FEATURES THE OUTSIDE DIMENSION OF 62 1/4" WALLS ABOVE SHOWER PAN PROVIDED BY OTHERS.

NOTE: THIS UNIT WILL NOT ACCEPT A DOOR.

Job Name	Approved By Print Name	Date	COMFORT DESIGNS	
Project No	Approved By Signature		Model No. SSB 6030 TR COL 1.0 FF PAN-I	
Comfort Designs 435 Industrial Road Savannah, TN 38372 tel 800.443.7269 fax 731.925.4290 www.comfortdesignsbathware.com	Architect		Drawing No. SSB 6030 TR COL 1.0 FF PAN	
	Engineer		Date Issued. 12-6-16	Drawing Rev. 5-9-24
	Rep		Material. Solid Surface	
	Wholesaler		Color.	
	Comments		Dimensions are in inches. Due to the nature of the materials dimensions may vary $\pm 1/2$ "	