

Main Street Porcelain Stone®

Features and Benefits

- Ideal for commercial settings
- High DCOF and low maintenance
- Cross-Sheen® finish for easy cleaning available on UPS only
- Contemporary color palette
Coordinating Trim available in all colors
- Extremely durable for long-lasting beauty
- Crossville recommends a grout joint of 3/16 to 1/4 inch
- Contains a minimum of 4% pre-consumer recycled content and is manufactured by Crossville® using processes that is Green SquaredSM certified
- Made in U.S.A..

Color Palette



AV211 ▶ Cinema Champagne



AV212 ▶ Café Caramel



AV213 ▶ Bistro Brown



AV214 ▶ Gallery Grey



AV215 ▶ Boutique Black



Photo:

AV211 ▶ Cinema Champagne 6 x 6 UPS

AV214 ▶ Gallery Grey 6 x 18 UPS


AV215 ▶ Boutique Black 18 x 18 UPS



Main Street

Porcelain Stone®

Sizes (Shown in AV202 Arizona Brown)



2 x 2 Mosaics
(Mounted on an
11-13/16 x 11-13/16 sheet.)

Get Planked!

Our Porcelain Stone® products are available in popular plank shapes with no minimum order and quick fulfillment. See website for more details and sizes.



Sizes & Finishes

Field Tile

Available in all colors

| Nominal (in) | Actual (in) | Thickness (in) | Finish |
|--------------|---------------------|----------------|--------|
| 6 x 6† | 5-13/16 x 5-13/16 | 3/8 | UPS |
| 6 x 18† | 5-13/16 x 17-13/16 | 3/8 | UPS |
| 12 x 12 | 11-13/16 x 11-13/16 | 3/8 | UPS |
| 18 x 18 | 17-13/16 x 17-13/16 | 3/8 | UPS |

† The cut/bevel tile is cut from larger format tile and the edges are beveled to provide a factory appearance. Please allow two to eight weeks for delivery depending on Crossville's production schedule. Crossville® recommends a grout joint of 3/16 to 1/4 inch. Actual measurements stated in inches indicate tile is calibrated (non-rectified). Actual measurements stated in mm indicate tile is rectified.

Mosaics

Available in all colors

| Nominal (in) | Actual (in) | Thickness (in) | Finish |
|----------------|-------------------|----------------|--------|
| 2 x 2 Mosaics* | 1-13/16 x 1-13/16 | 3/8 | UPS |

* 2 x 2 mosaic tile in 11-13/16 x 11-13/16 mounted sheets.

Coordinating Trim

Available in all colors

| Nominal (mm) | Actual (in) | Thickness (in) | Finish |
|------------------------|----------------|----------------|--------|
| 4 x 12 Single Bullnose | 3-3/4 x 11-3/4 | 3/8 | UPS |
| 6 x 12 Cove Base | 5-7/8 x 11-3/4 | 3/8 | UPS |



4 x 12 Bullnose



6 x 12 Cove Base

Product Performance


| | | |
|---------------------|------------|------------|
| Breaking Strength | >500 lbf | ASTM C648 |
| Bond Strength | >200 psi | ASTM C482 |
| Chemical Resistance | Unaffected | ASTM C650 |
| Frost Resistance | Resistant | ASTM C1026 |
| Water Absorption | <0.10% | ASTM C373 |
| Scratch Hardness | 7 | Mohs Scale |

Wet Dynamic COF

| | | |
|-----|-------------|-----------------------|
| UPS | 0.58 - 0.68 | AcuTest sm |
|-----|-------------|-----------------------|

Shade & Texture Index

Main Street has a shade variation of V3.

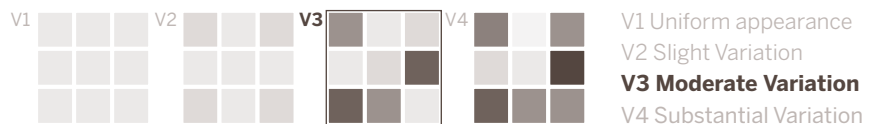

This porcelain tile product is produced with a V3 variation. Expect that the amount of color and texture on each piece may vary significantly. Inspect the product upon delivery and for best results, blend tile from several cartons during installation.



Main Street

Crossville, Inc. PO Box 1168
Crossville, TN
38557

Phone 931.484.2110
Fax 931.456.2956
E-Mail Crossc@CrossvilleInc.com
Web CrossvilleInc.com

Recommended Use

Main Street is recommended for interior floors, walls, countertops, and exterior walls in both residential and commercial applications. Main Street is not recommended for exterior horizontal surfaces or exterior paving. If offset pattern is required for tiles 18 inches or longer, Crossville® recommends an offset of not greater than 33%. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage. See CrossvilleInc.com for detailed installation instructions.

Wet area use for Main Street mosaics

Crossville® produces the Main Street mosaics with the Cross-Sheen® (UPS) finish. The AcuTest™ Wet Dynamic COF of the Main Street UPS finish is $\geq .58$. Their small sizes ensure frequent grout joints which provides traction and drainage. Crossville cannot control situations involving incorrect installation, improper slope to the drain for elimination of standing water and poor surface cleaning.

This information is provided so that customers may make a realistic and informed decision when comparing Main Street to other tile products in wet area environments, such as residential/commercial bathrooms, showers, and interior pool decks.

Care and Maintenance

Regular cleaning is the best way to keep Main Street tile looking good for years to come. Use clean, hot water (combined with a household cleaner for more aggressive cleaning). Rinse thoroughly and dry with a soft cloth. No waxes are needed. More information regarding the care and maintenance of Crossville® products is available at CrossvilleInc.com.

EcoCycle Tile Process™

Main Street contains a minimum of 4 percent pre-consumer recycled content and is manufactured by Crossville® using processes that recycle nearly 12 million pounds of previously discarded filtrate and fired tile waste. In addition to its own fired waste recycling, Crossville also accepts and recycles reclaimed, previously installed tile through its Tile Take-Back™ Program. For more information, visit CrossvilleInc.com/green.

Green Squared™ Certified

Crossville® has earned Green Squared™ certification from the Tile Council of North America (TCNA) for its entire U.S.-manufactured porcelain product line-up, as well as its manufacturing processes. The company is among the first ever recipients of this certification standard for the tile industry. TCNA developed the Green Squared certification under American National Standards Institute (ANSI) process. The multi-attribute program (ANSI A138.1) scores products in five categories of performance: product characteristics, manufacturing, corporate governance, innovation and end-of-life. Crossville's certified products and processes received stringent evaluation from Scientific Certification Systems (SCS), the green building industry's longest standing third-party certifier.

Hydrotect

Our porcelain tiles are available with Hydrotect™. Crossville's revolutionary invisible coating harnesses the power of light, water, and oxygen to create the best defense against dirt and pollution. Whether indoors or out, floors and walls stay cleaner, providing a superior experience in any space. For complete details check our website at CrossvilleInc.com.



National Accounts

For over 20 years we have been offering Porcelain tile to commercial customers at National Accounts pricing programs with special discounts. The National Accounts department provides materials forecasting, sales support and samples.

Exterior Cladding

Crossville's Porcelain Stone® Exterior Cladding Systems are suitable for virtually any conventional masonry application. When used in conjunction with our exterior cladding systems, Crossville's Porcelain Stone offers clear advantages: decreased construction costs, less site disturbance, low-to-zero maintenance after installation, accelerated construction schedules and greater strength than traditional masonry.

Crossville® Sample Express

Sample fulfillment & Help Line

Samples@CrossvilleInc.com
1 800 221.9093

Loose Samples for Architects & Designers

Loose Tile Samples

Sizes may vary depending on product series
Max. of 4 large field tile per order

Replacement Chips for PSS Rack

Max. of 5, 2 x 2 chips per color

Standard Shipping

UPS Ground

Our Warranty

Crossville Inc. guarantees that its products will meet or exceed the performance specifications outlined in ANSI A137.1-2012 and in the performance data section of the Crossville, Inc. general product catalog. For complete details check our website at CrossvilleInc.com.

Information listed here is subject to change.

Please refer to CrossvilleInc.com for the latest, most accurate information.

Trade Organizations



Environmentally Aware

