



## Optima® Sensor Faucet

EAF-200-HLT-ITM-CP-0.35GPM-MLM-FCT

### Product description

Hardwired Less Transformer Power Supply, Integrated Thermostatic Mixer, Polished Chrome Finish, 0.35 gpm, Multi-Laminar Spray, Infrared Sensor, Optima® Hardwired-Powered Deck-Mounted Mid Body Faucet.

### Compliances & Certifications



(ADA Compliant, ASME A112.18.1 Compliant, ASSE 1070, CEC Compliant, EPD, GPC 0.25 or less, HPD, LEED Water, NSF-61/CAN-61, NYC604.4, Proposition 65, Satisfies LEED Credits, TAS, WELL Building Standard)

### Code 33351015

#### Finish

- Polished Chrome (CP)

#### Connectivity

- Bluetooth Adapter

#### Downloads

- EAF 200\_225\_250\_275 Installation Instructions.pdf
- EAF 200\_225\_250\_275 (SP) Installation Instructions.pdf
- Faucet Spray Heads Maintenance Guide.pdf
- Optima Plus EAF 200 Repair and Maintenance Guide.pdf
- Faucet and Soap Dispenser Brochure.pdf
- Faucets Brochure (Spanish).pdf
- Additional Downloads

#### Videos

- Sloan Connect App®

---

## Details

- Flow Rate: 0.35 gpm (1.3 Lpm) (0.35GPM)
- Spray Type: Multi-Laminar (MLM)
- Sensor Type: Infrared
- Mounting Type: Single Hole
- Power Supply: Hardwired Less Transformer (HLT)
- Temperature Mixer: Integrated Thermostatic Mixer (ITM)
- Finish: Polished Chrome (CP)
- Factory Default Timeout: 30s
- Factory Default GPC: 0.25 gpc

---

## Features

Commercial Grade, ADA Compliant, Electronic, Sensor-Activated, Die-Cast Metal Hand Washing Faucet with the following features:

- Double Infrared Sensors with Automatic Setting Feature and Microprocessor
- Automatic Self-adapting Sensor Technology
- Magnetic Solenoid Valve
- Water Supply Connection with Flexible High-pressure Hose and Strainer
- 6 Volt DC Plug-in Adapter (must be ordered separately for Less Adapter/Transformer (-LT) faucets)
- Appropriate Mounting Hardware included
- 3 year limited warranty
- Chrome plated finish
- 0.35GPM flow pattern Rate with multi-laminar flow pattern
- AC Powered faucet less transformer (-LT), includes daisy chain connector for connecting up to 6 faucets.
- Integrated in spout thermostatic mixing valve (ITM) included to allow for temperature setting and adjustment while reducing the risk of scalding. ASSE-1070 Compliant.

---

## Electrical specifications

- Sensor Range: 4" -5" (102-127 mm)
- Timeout Adjustment Setting: 30 Seconds

---

## Warranty

[View Warranty Information](#)

---

## Notes


All information contained within this document subject to change without notice.

Looking for other variations of the EAF-200 product? [View the general spec sheet with all options.](#)

[Find a matching soap dispenser](#) for this faucet.

[Find a compatible sink](#) for this faucet

**EAF-200**  
Faucets with Single Line Water Supply

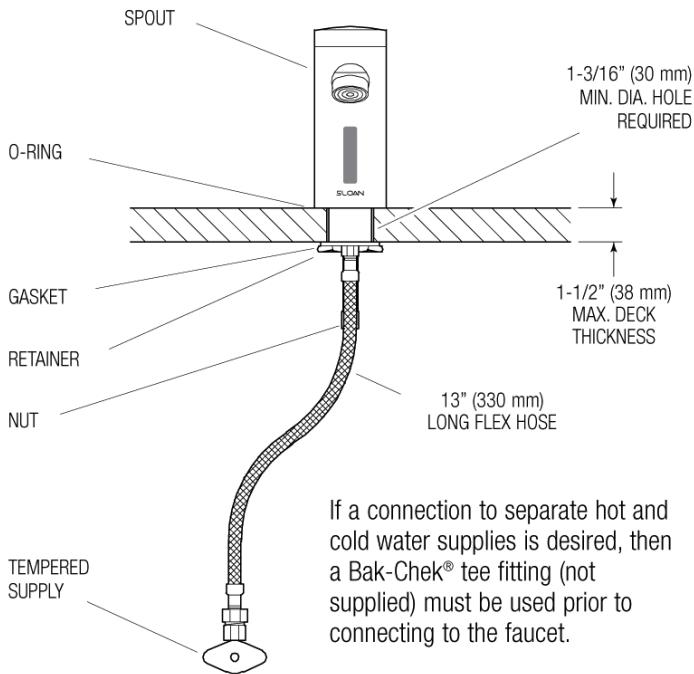

**EAF-200-ISM, EAF-200-ISM-IC AND EAF-200-ISM-DPU-IC**  
Faucets with Hot and Cold Water Supply

