

Incandescent lamps. The enduring solution.




Incandescent lamps represent the original lighting technology, remaining virtually unchanged since their invention in the mid-19th century, and the lighting technology Satco was founded upon.

This is the technology most everyone has become familiar with and the baseline comparison for all other lighting technologies. As the incandescent bulb becomes more and more regulated, Satco remains on the cutting edge of new lighting technologies. Still, we remain well-stocked with incandescent lamps in a multitude of wattages, base sizes, and shapes for every application.

Incandescent lamp features:

- High lumen output
- Up to 5,000 hour life
- Virtually every size and style imaginable
- Wattages from 3 to 500 Watts
- Durable vibration and rough service products
- Colored and special application types

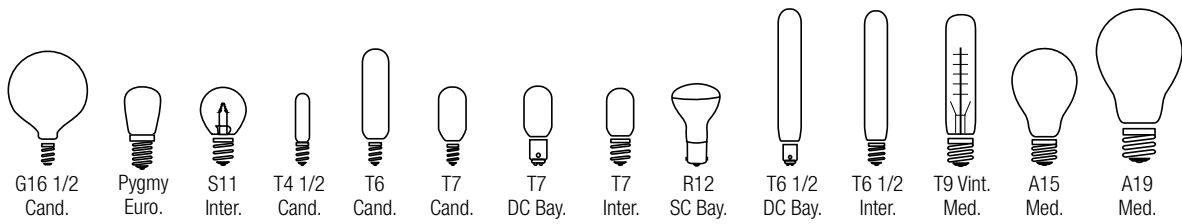

Watts	Bulb Type	Base	Satco Prod. #	Lamp Code	Volts	Finish	M.O.L. Inches	Filament	Initial Lumens	Avg. Rated Hours	Pkg. Type	Master/Inner Carton	Notes
15	G16 1/2	Cand.	S3821	15G16 1/2	120	Clear	3	C-7A	114	1500	Box	500/25	
			S3726	15G16 1/2	120	Clear	3	C-7A	114	1500	CD/2	120/10	
			S3824	15G16 1/2/W	120	Satin White	3	C-7A	94	1500	Box	500/25	
			S3752	15G16 1/2/W	120	Satin White	3	C-7A	94	1500	CD/2	120/10	
			A3921	15G16 1/2	130	Clear	3	C-7A	98	2500	Box	500/25	
			A3924	15G16 1/2/W	130	Satin White	3	C-7A	83	2500	Box	500/25	
	Pygmy	Euro.	S7939	15T8/120V/E14	120	Clear	2 1/4	C-5A	100	1000	Box	25	
			S7941	15T8/220V/E14	220	Clear	2 1/4	C-5A	100	1000	Box	25	
			S7945	15E14/130V/Oven	130	Clear	2	-	-	10000	Box	1000/50	
	S11	Inter.	S3628	15S11/N	120	Clear	2 3/8	C-7A	100	1500	Box	600/10	
	T4 1/2	Cand.	S3913	15T4 1/2/C	130	Clear	1 1/2	C-7A	90	1000	Sleeve/10	10	5
	T6	Cand.	S3315	15T6/F	120	Frost	4	C-5A	90	2500	Sleeve	500/25	5
			S3715	15T6/F	120	Frost	4	C-5A	90	2500	CD/2	72/6	5
			S3910	15T6	130	Clear	3 1/16	C-5A	95	2500	Sleeve/10	120/10	
			S3912	15T6/145V	145	Clear	3 1/16	C-5A	90	2000	Sleeve/10	120/10	
			S4727	15T6/145V	145	Clear	3 1/16	C-5A	90	2000	CD/1	120/10	
	T7	Cand.	S3905	15T7C	130	Clear	2 1/4	C-5A	95	2500	Sleeve/10	120/10	
			S4718	15T7C	130	Clear	2 1/4	C-5A	95	2500	CD/1	120/12	
S3906			15T7/DC	130	Clear	2 1/4	C-5A	95	2500	Sleeve/10	120/10		
DC Bay.		S4719	15T7/DC	130	Clear	2 1/4	C-5A	95	2500	CD/1	120/12		
		S3911	15T7/N	130	Clear	2 1/4	C-5A	95	2500	Sleeve/10	120/10		
		S4722	15T7/N	130	Clear	2 1/4	C-5A	95	2500	CD/1	120/12		
20	R12	SC Bay.	S1383	1383	13	-	2 5/8	C-6	-	300	Box	10	
			Shatter Proof	S3618	1383/TF	13	-	2 5/8	C-6	-	300	Box	10
	T6 1/2	DC Bay.	S3297	20T6 1/2DC	130	Clear	5 3/8	C-6	150	1500	Box	500/25	
			S3298	20T6 1/2DC/F	130	Frost	5 3/8	C-6	140	1500	Box	500/25	
		Inter.	S3280	20T6 1/2N	130	Clear	5 3/8	C-6	150	1500	Box	500/25	
			S3281	20T6 1/2N/F	130	Frost	5 3/8	C-6	140	1500	Box	500/25	
	T7	Cand.	S2751	20T7/C	130	Clear	2 1/4	C-5A		1500	Box	500/50	
	T9	Med.	S2415	20T9/CL/120V/Vint.	120	Clear	5 1/2	Hairpin	80	3000	Box	48/6	
25	A15	Med.	S3814	25A15/CL	130	Clear	3 1/2	C-9	150	2500	Box	500/25	
			S3815	25A15/F	130	Frost	3 1/2	C-9	150	2500	Box	500/25	
			Shatter Proof	S4880	25A15/TF	130	Frost	3 1/2	C-9	120	2500	Box	500/25
	A19	Med.	S5010	25A19/F/12V	12	Frost	4 1/8	C-6	250	1500	Box	120/6	
			S5020	25A19/F/34V	34	Frost	4 1/8	C-6	250	1500	Box	120/6	
			S6040	25A19/CL	120	Clear	4 1/8	C-9	185	1500	2pk	120	
			S3940	25A19/CL	130	Clear	4 1/8	CC-6	170	2500	2pk	120	

NOTE: When using a 130 Volt lamp on a 120 Volt line, life is extended approximately 2.5 times and lumens are reduced approximately 20%.