









HEKMAN

ASSEMBLY INSTRUCTIONS


23325 - Side Chair

A HOWARD MILLER COMPANY

| | | | |
|---|---|----------------------|-------|
| A |  | | 1Pc |
| B |  | 5/16" x 12.5 x 8.5mm | 4Pcs |
| C |  | 5/16 | 10Pcs |
| D |  | 5/16 x 19mm | 10Pcs |
| E |  | 5/16 x 38mm | 2Pcs |
| F |  | 5/16 x 89mm | 4Pcs |
| G |  | | 1Pc |

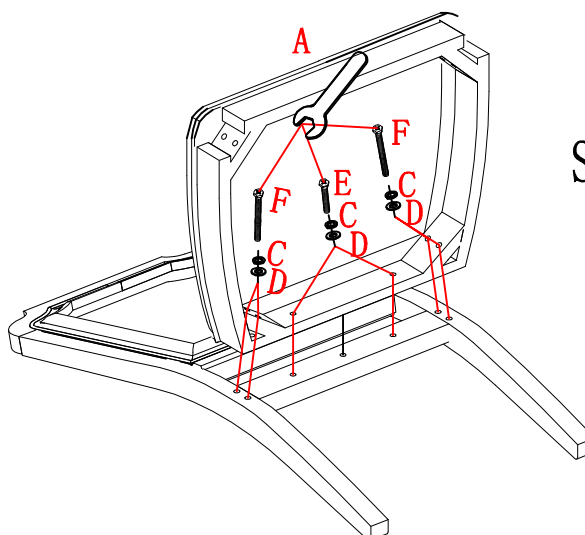

Step 1

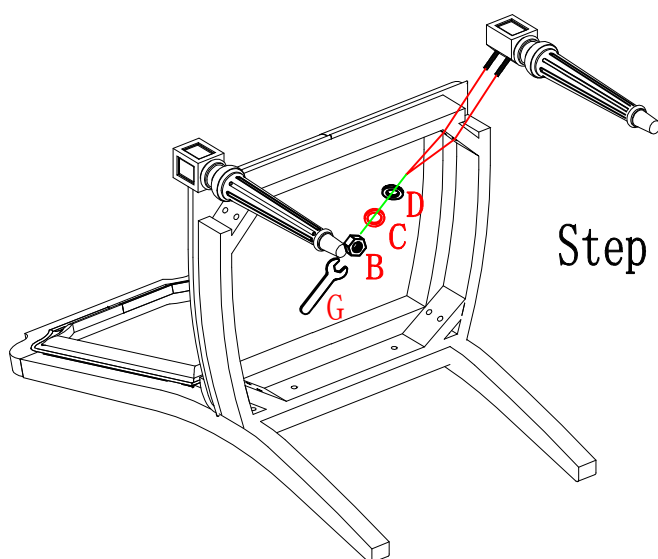


Step 2

Assemble the chair on soft and clean surface to prevent scratching. Loosen screws holding upholstered seat to seat apron assembly, it's not necessary to remove the seat completely.

Step 1: Assemble the back frame and the chair seat together with Bolt (E, F), Washer (C) and Lock washer (D) using Wrench (A).

Step 2: Assemble the front legs to the chair with Nut (B), Washer (C) and Lock washer (D) using Wrench (A). Do not tighten nuts completely.

Step 3: Set the chair upright on a flat surface. Adjust front legs so all four chair legs touch the floor, tighten nut completely on front legs. (The seat cushion may need to be loosen to adjust front legs).

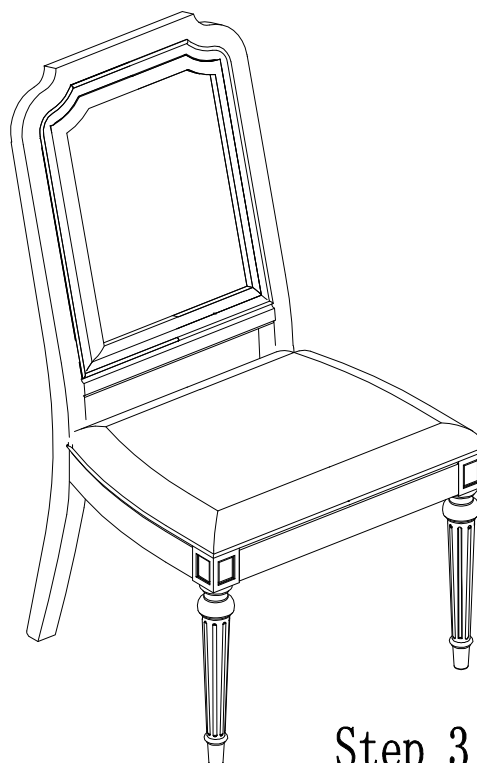

Step 3

MADE IN VIETNAM