

IN21242

INSTALLATION INSTRUCTIONS

Please read carefully and save these instructions, as you may need them at a later date.

CAUTION

WARNING: Risk of Fire. Consult a qualified electrician to ensure correct branch circuit conductor. Min 90°C supply conductors.

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.


GENERAL

All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

ASSEMBLY AND INSTALLATION

1. Carefully unpack and lay out the parts as shown in illustration and read all instructions before starting.
2. Rod Connections:
 - Thread the fixture wire from the lamp body (16) through the lower stem (15), and then secure the lower stem (15) on to lamp body (16) using the nipple (13).
 - Thread the fixture wire through the middle stem (14), and then secure the middle stem (14) on to the lower stem (15) using the nipple (13).
 - Thread the fixture wire through the upper stem (12), and then secure the upper stem (12) on to the middle stem (14) using the nipple (13).
3. Thread the fixture wire through the swivel (11) and canopy (9), and then secure the stem assembly to the swivel (11) of the canopy.
4. Attach the cross bar (7) to the outlet box by using two box screws (8).
5. Pull out the outlet wire and ground wire from the outlet box (1). Make wire connections (5).
 - Ribbed wire (w/o marking) from light to White wire (2) from power source
 - Smooth wire (w/o marking) from light to Black wire (3) from power source
 - Loop the ground wire (4) to cross bar (7) with a ground screw (6)
6. Attach the canopy (9) to the cross bar (7) by inserting the fixture mounting screws, and then secure it with two ball nuts (10).
7. Attach the glass shade (18) to the lamp body (16), and then secure it with the socket ring (19).
8. Screw the bulb (not included) into the socket (17).
9. Angled mounting recommended for a vaulted or angled ceiling. (See Fig. 1)

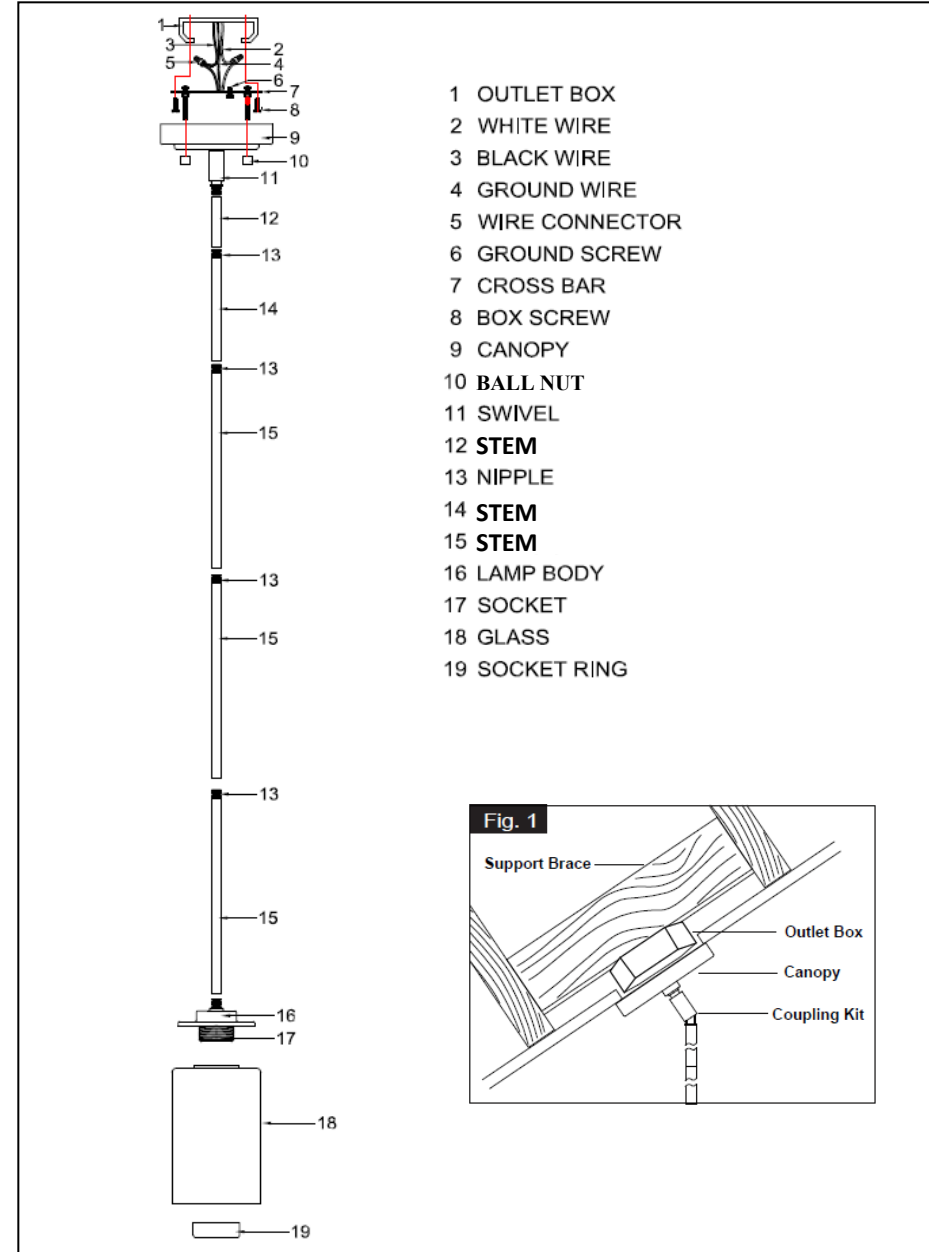

- 1 OUTLET BOX
- 2 WHITE WIRE
- 3 BLACK WIRE
- 4 GROUND WIRE
- 5 WIRE CONNECTOR
- 6 GROUND SCREW
- 7 CROSS BAR
- 8 BOX SCREW
- 9 CANOPY
- 10 BALL NUT
- 11 SWIVEL
- 12 STEM
- 13 NIPPLE
- 14 STEM
- 15 STEM
- 16 LAMP BODY
- 17 SOCKET
- 18 GLASS
- 19 SOCKET RING

