

Lavatory Faucet SLC-4712-1.5

Installation and Service Instructions



Model Numbers

SLC-4712-1.5 Lavatory faucet with pop-up drain

Alternate Finish Code

append to part numbers when applicable -STN Satin Nickel

-- Chrome (standard)

Tools & Materials




Meed Help?

Symmons customer service: Phone: (800) 796-6667 gethelp@symmons.com

Mon - Fri 7:30 am - 6:00 pm EST

- www.symmons.com/service
- Technical help
- Product information
- · Warranty policy.

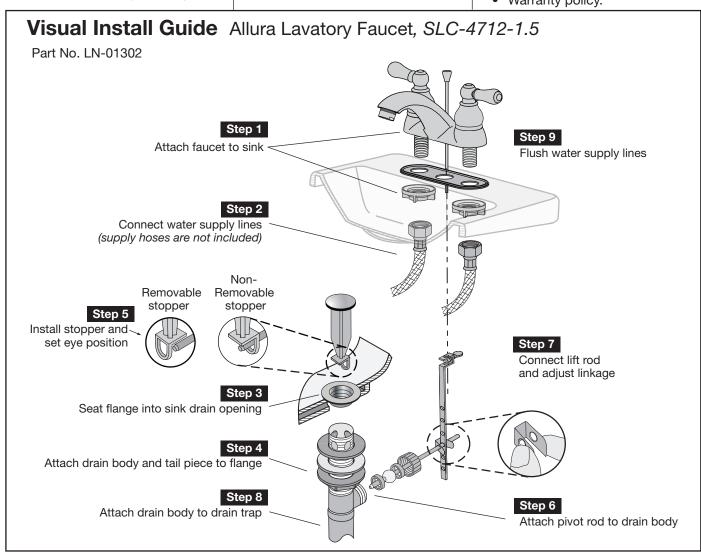


WARNING: This product can expose you to chemicals including lead, which is known to the state of California to cause cancer, birth defects, or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.


Installation Instructions

Caution: If replacing an older faucet ensure water supply is turned OFF before removing. Then turn faucet control valves ON to relieve water pressure.


Step 1 Attach faucet to sink



Step 2 Connect water supply lines




Step 3 Seat flange into sink drain opening



* use included washer only for when plumbers putty is not available


* Note: *Washer* included with faucet should only be used when plumbers putty is not available.

Step 4 Attach drain body to flange




* Note: Attach tail piece to drain body using teflon tape. tape or plumber's putty.


Step 5 Install stopper and set eye position



Step 6 Attach pivot rod to drain body



Step 7 Connect lift rod and adjust linkage

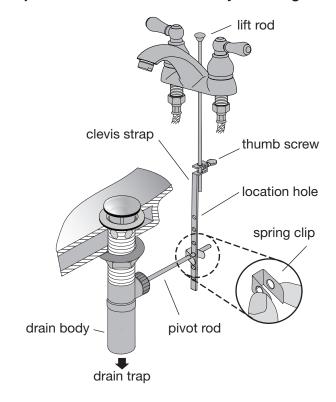

Step 8 Attach drain body to drain trap


Step 9 Flush water supply lines





Care of faucet finish


Clean finish area by using mild soap and water or non-abrasive cleaners and then rinse immediately. A non-abrasive wax may be used to preserve finish area.


Valve cartridge replacement

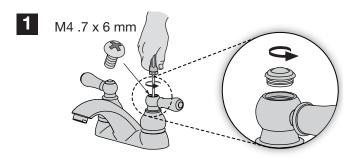



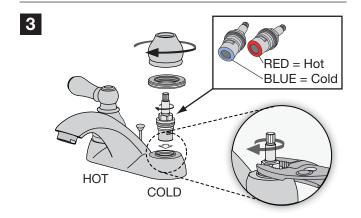




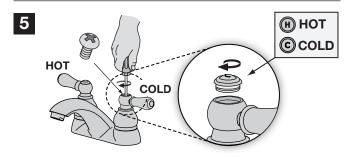

Dimensions Allura Lavatory Faucet, *SLC-4712-1.5* Part No. LN-01302 9-1/4" 236 mm 3-3/4" -Deck thickness 95 mm 1-3/4" (45 mm) max 1-15/16" 49 mm 1/2"-14 NPSM 2" (51 mm) Hole diameter 1" (25 mm) 4" (102 mm) 108 mm 6" (152 mm)

Parts Assembly Allura Lavatory Faucet, SLC-4712-1.5

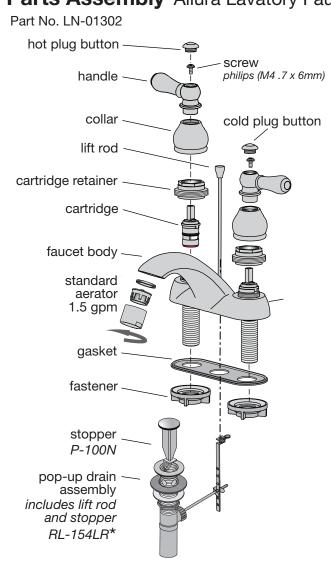

Rep	lacement Parts
Part Number	Item
LN-01452 (hot) OFF = CW LN-01453 (cold) OFF = CCW	Cartridge Hot = RED Cold = BLUE
LN-01454	Handle Kit hot & cold plug buttons (2) screw (1) handle (1)
RL-235	Lift Rod
SWA-17FR FLR-111-1.5 FLR-111-1.0	Aerator assembly flow rates 2.2 gpm (8.3L/min) 1.5 gpm (5.7L/min) 1.0 gpm (3.8L/min)

Ordering replacement parts:

Call Symmons customer service at (800) 796-6667, (781) 848-2250 M-F 7:30 am - 6:00 pm EST or check our website at www.symmons.com for a list of Symmons distributors.