



GE APPLIANCES

VARIABLE REFRIGERANT FLOW HEAT PUMP SYSTEM INDOOR UNIT

MWAM015NE2AA

15K
BTH/h

SUBMITTAL

Job Name:

Purchaser:

Submitted To:

Construction:

Reference:

Approval:


Date:

Submitted By:

Unit:

Drawing #:

MEDIUM ESP SLIM DUCT

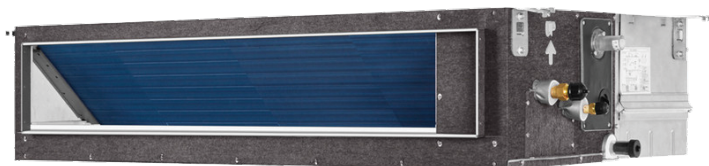

Features and Benefits

- Standard integrated R32 leak detector for enhanced safety and compliance.
- Integrated drain pump and Ag+ silver ion.
- Static pressure value: 50-150Pa supporting flexible duct design and balanced airflow convert to inches 0.2" - 0.6".
- Optional air return configurations: Bottom or rear air return for flexible duct design.
- Provisions for fresh air connection with a reserved knockout for fresh air inlet.

Specifications

ODU	Marketing Model Name	MWAM015NE2AA
	Nominal Capacity (Btu/h)	15,000
	Dimension: H x W x D (in.)	9 3/4 x 43 5/16 x 27 9/16
	Net Weight (lbs)	88.2
	Sound Level (dBA)	39/37/36/35/34/33/31
	Heating Capacity (Btu/h)	16,500
Electrical	Voltage (V / Ø / Hz)	208-230/1/60
	Minimum Circuit Ampacity (MCA)	2.63
	Maximum Overcurrent Protection	15
	Running Current, Cooling	0.43
	Running Current, Heating	0.43
Fan	Type	Forward Curved Fan
	Motor Type	BLDC
	Motor Output	115 W
	Number of Speeds	7
	Airflow Rate, CFM (H/M/L)	653/588/565/541/526/512/441
	Airflow Rate, m3 /h (H/M/L)	1110/1000/961/920/894/870/750
	Ext. Static Pressure Max	0.6"
Refrigerant and Piping	Refrigerant Type/Charge (oz.)	R32 / -
	Liquid Pipe O.D. (in)	1/4
	Gas Pipe O.D. (in)	1/2

For more information visit us:

GEAppliancesAirAndWater.com

©Copyright 2026 GE Appliances, a Haier Company. GE is a trademark of the General Electric Company. Manufactured under trademark license. GE Appliances has a policy of continuous improvement of its products and reserves the right to change materials and specifications without notice.




GE APPLIANCES
a Haier company

AIR&WATER
SOLUTIONS

Return Air Opening (Inlet)	6-1/2 *34-1/8 inch
Supply Air Opening (Outlet)	9-3/8*39-3/16 inch

Dimensions (unit: in.)

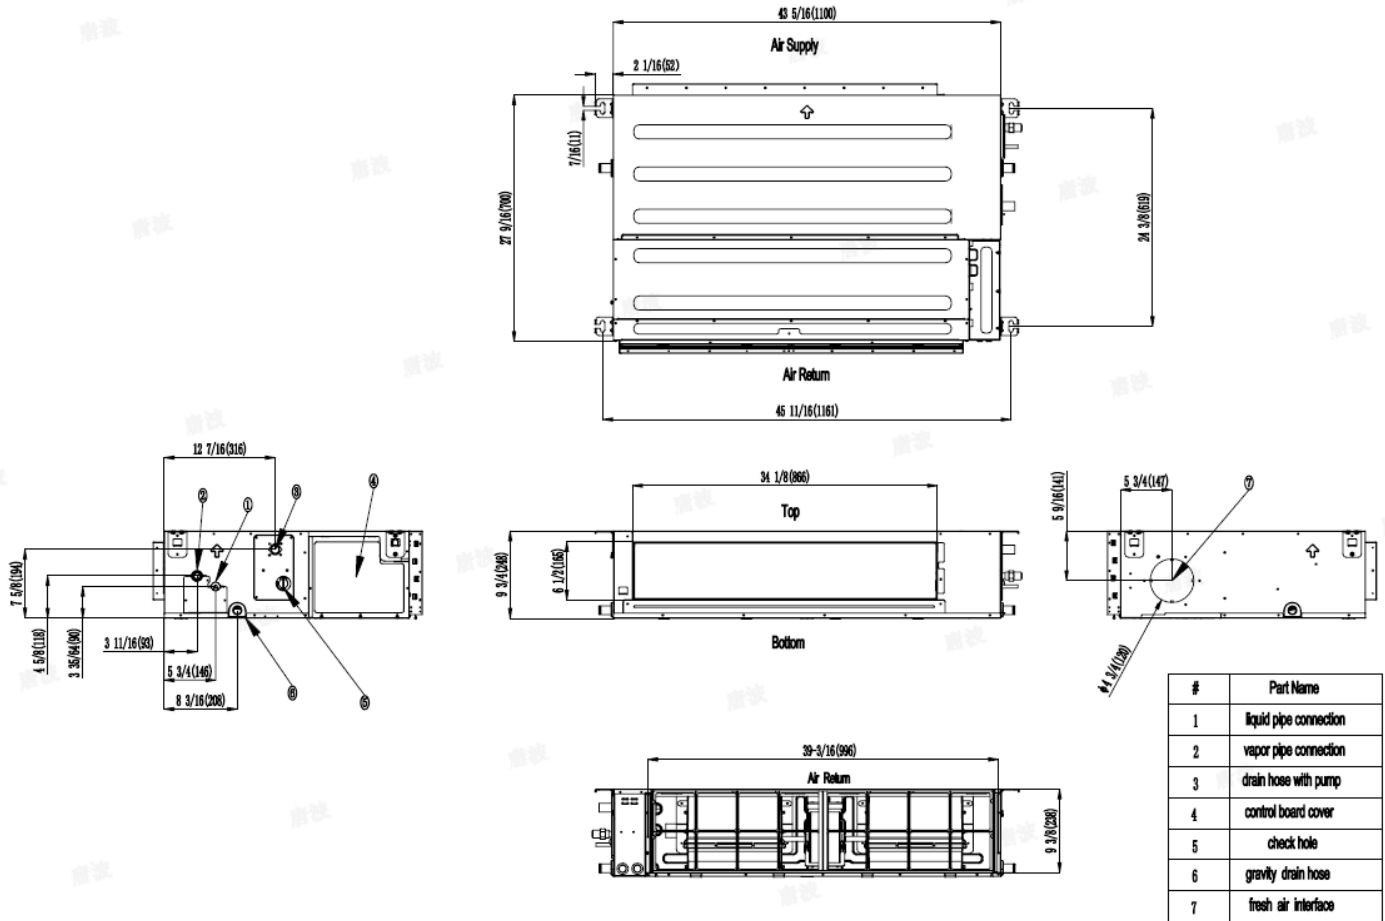

SUBMITTAL REVISION HISTORY

05-08-26:	Submittal release.
08-20-26:	Specification update (Ext. Static Pressure Max).