



592W7 7-Mode Hand Shower Wand **Specification Submittal**

Location:

Model Numbers

- ☐ **592W7** 7-Mode Hand Shower Wand

Options/Modifications

- ☐ **15** **CG** 1.5 gpm (5.7 L/min) flow rate restrictor
- ☐ **BBZ** Brushed Bronze Finish
- ☐ **MB** Matte Black Finish
- ☐ **STN** Satin Nickel Finish

Note: Append appropriate suffix to model number.

Compliance

- ASME® A112.18.1/CSA® B125.1
- WaterSense® 2.0 gpm (7.6 L/min) and 1.5 gpm (5.7 L/min)
- 1.5 gpm option meets CALGreen requirements




Feature Highlights

- Standard on the Elm collection
- HydroMersion technology channels water for increased pressure and force
- 7 modes, including Full, Massage, Waterfall, Spa, and Pause
- Full mode offers firm, invigorating sprays
- Massage mode provides pulse for muscle relief
- Waterfall mode delivers a rich, unrestricted flow
- Spa mode uses atomizing nozzles for an invigorating, restorative shower
- Pause mode reduces flow to a trickle
- Easy-shift thumb lever changes modes
- Non-corrosive EverFlow rubber nozzles are easy to clean
- 2.0 gpm (7.6 L/min) flow rate

Warranty


Limited Lifetime - for residential installations.
10 Years - for commercial/industrial installations.
Refer to www.symmons.com/warranty for complete warranty information.



Architectural/Engineering Specification

Symmons Elm® 7-Mode Hand Shower Wand _____ Features include standard on the Elm collection, HydroMersion technology channels water for increased pressure and force, 7 modes, including Full, Massage, Waterfall, Spa, and Pause, full mode offers firm, invigorating sprays, massage mode provides pulse for muscle relief, waterfall mode delivers a rich, unrestricted flow, spa mode uses atomizing nozzles for an invigorating, restorative shower, pause mode reduces flow to a trickle, easy-shift thumb lever changes modes, non-corrosive EverFlow rubber nozzles are easy to clean, 2.0 gpm (7.6 L/min) flow rate. 10-Year Commercial Warranty. ASME A112.18.1/CSA B125.1, WaterSense 2.0 gpm (7.6 L/min) and 1.5 gpm (5.7 L/min) compliant. 1.5 gpm option meets CALGreen requirements. Available options: 15 = 1.5 gpm (5.7 L/min) flow restrictor, BBZ = Brushed Bronze finish, MB = Matte Black finish, and STN = Satin Nickel finish.

Dimensions

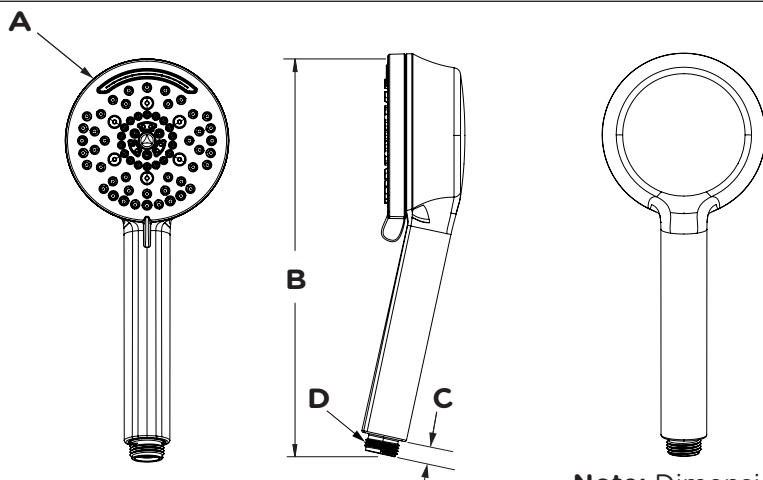

Measurements	
A	Ø 3-15/16", 100 mm
B	9-3/4", 247 mm
C	7/16", 11 mm
D	G 1/2

Note: Dimensions are subject to change without notice.