



70TXL

SpeedCut™ Max



3/8"
FULL CHISEL



70TXL
SpeedCut™ Max

FUEL-INJECTED SAFETY CHAIN.

Fast and Smooth. All the performance of
LPX & EXL plus the benefit of **low kickback**.



PRUNING / LIMBING

80TXL
SpeedCut™ Nano

FAST.
SMOOTH.
LOW KICKBACK.

Micro Chisel
Bumper Drive Link
.325" LP
20-38 cc



CHUNKING THE STICK / GROUND CUTTING

70EXL
PowerCut™

Full Chisel
3/8"

60-100+ cc

FAST.

70LPX
PowerCut™

Full Chisel
Bumper Drive Link
3/8"

60-100+ cc

FAST.
SMOOTH.

NEW!
70TXL
SpeedCut™ Max

Full Chisel
Bumper Drive Link
3/8"

60-100+ cc

FAST.
SMOOTH.
LOW KICKBACK.

Our engineers set out to develop a chain with the performance that professionals demand. Complex riggings, weather extremes, awkward body positions and fatigue can create risks even for the most experienced. Adding a low kickback feature mitigates one layer of risk and keeps pros productive.

Safety is paramount.

WATCH THE VIDEO ▶




FAST AND SMOOTH.




DEBUNKING THE MYTH:

Low kickback chain can't be fast.

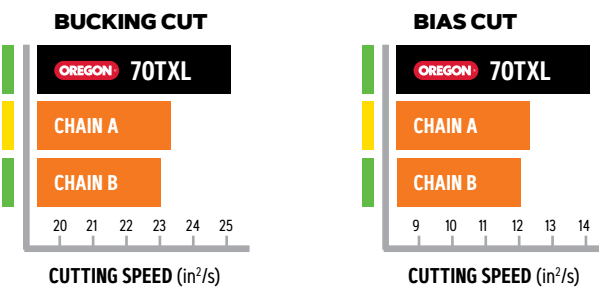

■ FULL CHISEL
■ FULL CHISEL & BUMPER DRIVE LINK

*Data collected from testing equipment at Oregon Tool, Inc. test lab facility.
Bucking: 14" diameter Douglas Fir | Bias: 12" diameter Douglas Fir

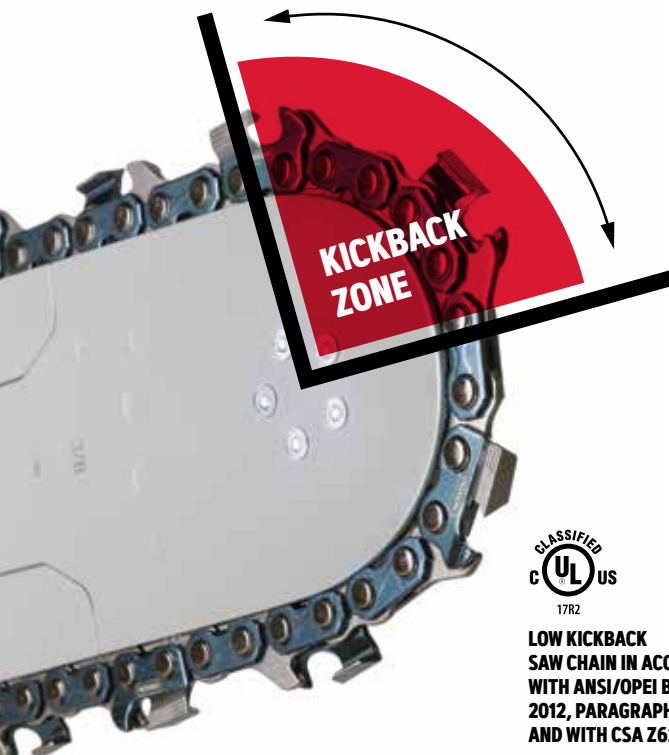

FULL CHISEL

The full chisel cutter features an aggressive cutting corner and optimized gullet geometry that delivers increased speed, chip clearance, and overall performance straight out of the box.



ALL-NEW BUMPER DRIVE LINK DESIGN

Combining decades of chain development expertise, 70TXL chain aims to break conventional thinking about "safety chain" or low kickback ANSI certified chain. Through extensive testing and development, we designed a low kickback chain without sacrificing an ounce of performance or responsiveness in the cut. No more compromises, just fast, smooth cutting with low kickback. Don't let the bumper fool ya' — this chain is lightning fast!

Engineering challenge.

"Delivering a chain that is truly intended for the professional, without compromise."

TODD GERLACH
SR. DIRECTOR, PRODUCT ENGINEERING

WATCH THE VIDEO ►



“Cross cuts were super smooth, super fast”

JESSE BROWN

OWNER, ARBORIST
TRILLIUM TREE CARE | CORVALLIS, OR



Reactions from the Pros.

WATCH THE VIDEO ►





70TXL

SpeedCut™ Max

PITCH **3/8"**

GAUGE **.050"**
.058"
.063"

SAW SIZE:
60-100+ cc

BAR LENGTHS:
16"-32"



FULL CHISEL



OREGON® OCS-01 STEEL
Custom-formulated alloy steel for greater durability in all weather environments. Resists fractures during extreme temperature changes when processing cold or frozen timber.
+ Induction-hardened rivets for greater wear resistance

ENHANCED CUTTERS
Chrome plating maintains the cutting edge longer. Heat treated and shot peened to strengthen and reduce breakage. Blueing process provides protection against corrosion.

PATENTED GRIND GEOMETRY
Unlike conventional plunge grinding, our premium cutters are precision contoured to yield complex, highly accurate, cutting edge geometries. It's not just a grind, it's our state-of-the-art process that sets us apart from our competition.

LUBRITEC™ OILING SYSTEM
Tie strap reservoirs keep oil on the chain. Integrated design with Oregon® guide bars keeps high-friction areas well lubricated to reduce wear and extend chain and bar life.



OREGON® PART NUMBERS

OREGON®				
70TXL SpeedCut™ Max	DRIVE LINKS	BAR in.	GAUGE in.	PITCH in.

OEM CROSS REFERENCE

HUSQVARNA™ C83, C85	STIHL™ 33RS, 35RS, 36RS	STIHL™ 33RH, 35RH, 36RH	STIHL™ 33RH3, 35RH3, 36RH3	STIHL™ 33RS3, 35RS3, 36RS3

LOOPS

72TXL060G	60	16	.050	3/8	585 55 00-60	3623 005 0060	3133 005 0060	3135 005 0060	3624 005 0060
72TXL064G	64	18	.050	3/8	—	—	—	—	—
72TXL066G	66	18	.050	3/8	585 55 00-66	3623 005 0066	3133 005 0066	3135 005 0066	3624 005 0066
72TXL068G	68	18	.050	3/8	585 55 00-68	3623 005 0068	—	—	3624 005 0068
72TXL070G	70	20	.050	3/8	585 55 00-70	3623 005 0070	—	—	3624 005 0070
72TXL072G	72	20	.050	3/8	585 55 00-72	3623 005 0072	3133 005 0072	3135 005 0072	3624 005 0072
72TXL081G	81	24	.050	3/8	—	—	—	—	—
72TXL084G	84	24	.050	3/8	585 55 00-84	3623 005 0084	3133 005 0084	3135 005 0084	3624 005 0084
72TXL091G	91	28	.050	3/8	—	3623 005 0091	3133 005 0091	3135 005 0091	3624 005 0091
72TXL092G	92	28	.050	3/8	—	—	—	—	—
72TXL093G	93	28	.050	3/8	585 55 00-93	3623 005 0093	—	—	3624 005 0093
72TXL105G	105	32	.050	3/8	585 55 00-05	3623 005 0105	3133 005 0105	3135 005 0105	3624 005 0105
73TXL060G	60	16	.058	3/8	581 62 69-60	3622 005 0060	—	—	—
73TXL068G	68	18	.058	3/8	581 62 69-68	3622 005 0068	—	—	—
73TXL072G	72	20	.058	3/8	581 62 69-72	3622 005 0072	—	—	—
73TXL084G	84	24	.058	3/8	581 62 69-84	3622 005 0084	—	—	—
75TXL072G	72	20	.063	3/8	—	3621 005 0072	3132 005 0072	3134 005 0072	3626 005 0072

REELS


72TXL100U	100 ft	N/A	.050	3/8	585 55 00-01	3623 005 1640	3133 005 1640	3134 005 1640	3624 005 1640
73TXL100U	100 ft	N/A	.058	3/8	581 62 69-01	—	—	—	—
75TXL100U	100 ft	N/A	.063	3/8	—	3621 005 1640	3132 005 1640	36 RH3 100R	3626 005 1640

.050 .058 .063

FULL CHISEL FULL CHISEL & BUMPER DRIVE LINK


MAINTAIN SHARPNESS WITH EASE.

EXACT SYMMETRY
WITH A STANDARD
7/32" ROUND FILE



HOOK ANGLE

The 70TXL cutter is engineered and manufactured with pinpoint accuracy to pair with a 7/32" round file – achieving the perfect hook angle with ease.

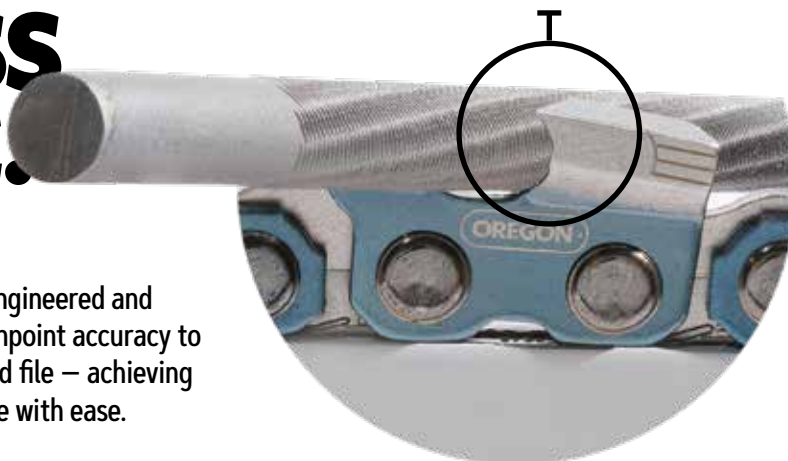

OREGON®

TRUSTED BY PROS SINCE 1947

www.OregonProducts.com