

Spring-Flo® Faucet Aerator - 1.8 gpm Flow Restricted Regular Size



flow, stop and go®

Features and Benefits

- ▶ Three screen slotted aerator.
- ▶ Creates a smooth stream of water, fully aerated with a unique air intake through side slots.
- ▶ Maximizes aeration and reduces splash.
- ▶ Disassembles for easy and repeated cleaning.
- ▶ Available finish: chrome.
- ▶ Roll marked housings with statutory marks.

Certifications

ANSI/NSF®-61-372 (pending)
ASME A112.18.1M and CSA B125 (pending)
Meets **CALGreen** requirements

Thread & Part Number



Part #	Designation	Thread Size
15 201	Regular male with tightening grooves	15/16"-27
15 210	Regular female	55/64"-27
15 220	Regular dual thread	15/16"-27 x 55/64"-27

Other product combinations available.

Packaging:

Reg. male/female/dual thread 1 pc (bag), 6 pcs (tube), 50 pcs (tray)

Flow Rate Curve

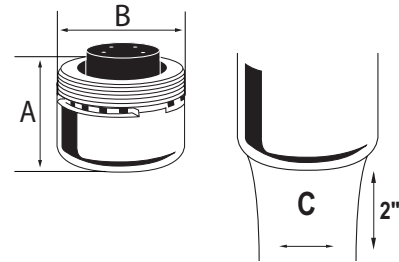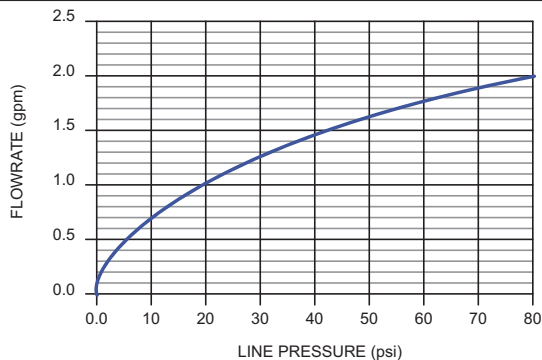

Dimensions

No	mm	In
Regular Male		
A	14.40	.567
B	23.50	.925
C	≈ 13	≈ 1/2
Regular Female & Dual Thread		
A	18.54	.730
B	23.50	.925
C	≈ 13	≈ 1/2

Housings



Technical Data

Materials:

Body	Brass
Washer	Santoprene
Filter Screen	Brass /Stainless Steel
Mixing Chambers	Brass

Continuous

Short-term (5 minutes max.)
Per ASME A112.18.1 testing requirements.

