
SYMMONS® Solarity™



3396TRM
Tub/Shower/Hand Shower Trim
Specification Submittal

Location:

Model Numbers

☐ **3396TRM**
Tub/Shower/Hand Shower Trim

Valve Options:
-261 Series Temptrol® Shower Valve with TRM modifer
-161 Series Temptrol Shower Valve requires TC modifier
-3DIVBODYSRT

Feature Highlights

- Solarity Tub/Shower/Hand Shower Trim.
- Requires Temptrol Pressure-Balancing Shower Valve.
- Separate three-function diverter body.
- Metal lever handle.
- 30" slide bar for hand shower wand.
- Dual checks for backflow protection
- 60" flexible metal hose.
- 5-1/8" slip-on tub spout.
- Single-mode HydroMersion® showerhead.
- Single-mode HydroMersion hand shower wand with Non-Positive Shutoff (NPSO).
- Standard 2.0 gpm (7.6 L/min) flow restrictor.
- Components shall be metal and nonmetal construction, plated in standard Polished Chrome finish.

Compliance

- ASME® A112.18.1/CSA® B125.1
- WaterSense® 1.5 gpm (5.7 L/min) 2.0 gpm (7.6 L/min)
- Lever handle meets ADA requirements for operation
- CALGreen® 1.5 gpm (5.7 L/min)

C US

Certified by CSA Group

Options/Modifications

☐	**15**	1.5 gpm (5.7 L/min) flow restrictor
☐	**MB**	Matte Black finish
☐	**STN**	Satin Nickel finish
☐	**L1**	Less showerhead
☐	**L2**	Less hand shower
☐	**L3**	Less showerhead and hand shower
☐	**L5**	Less hand shower system
☐	**L7**	Less handle
☐	**TC**	Test Cap Trim (includes TA-10® & T-12A) *used with 161 Series Temptrol Shower Valve*

Warranty

Limited Lifetime - for residential installations.
10 Years - for commercial/industrial installations.
Refer to www.symmons.com/warranty for complete warranty information.

SKU Builder

Series	Finish	Modifier	Flow Rate	Trim (required)	Test Cap	Final SKU
3396	STN		15	TRM		3396STN15TRM
3396	MB	L3		TRM	TC	3396MBL3TRMTC


Notes: No more than two modifiers (L1-L7) permitted when ordering. Modifiers will list in numerical order.

Architectural/Engineering Specification

Symmons Solarity Tub and Shower and Hand Shower Trim _____ Includes Solarity Tub/Shower/Hand Shower Trim for Temptrol Pressure-Balancing Shower Valve. Features metal lever handle, 30" slide bar for hand shower wand, dual checks for backflow protection, 60" flexible metal hose, 5-1/8" slip-on tub spout, single-mode HydroMersion hand shower wand with NPSO, single-mode HydroMersion showerhead, and standard 2.0 gpm (7.6 L/min) flow restrictor. Components shall be metal and nonmetal construction, plated in standard Polished Chrome finish. 10-Year Commercial Warranty. ASME A112.18.1/CSA B125.1, WaterSense 1.5 gpm (5.7 L/min) and 2.0 gpm (7.6 L/min) compliant. Lever handle meets ADA requirements for operation. 1.5 gpm option meets CALGreen requirements. Available options: 15 = 1.5 gpm (5.7 L/min) flow restrictor, L1 = Less showerhead, L2 = Less hand shower, L3 = Less showerhead and hand shower, L5 = Less hand shower system, L7 = Less handle, MB = Matte Black finish, STN = Satin Nickel finish, and TC = Test Cap Trim.

Symmons Industries, Inc. ▪ 31 Brooks Drive ▪ Braintree, MA 02184 ▪ Phone: (800) 796-6667 ▪ Fax: (800) 961-9621
Copyright © 2026 Symmons Industries, Inc. ▪ symmons.com ▪ gethelp@symmons.com ▪ ZV-4146 REV A ▪ 083126

Dimensions

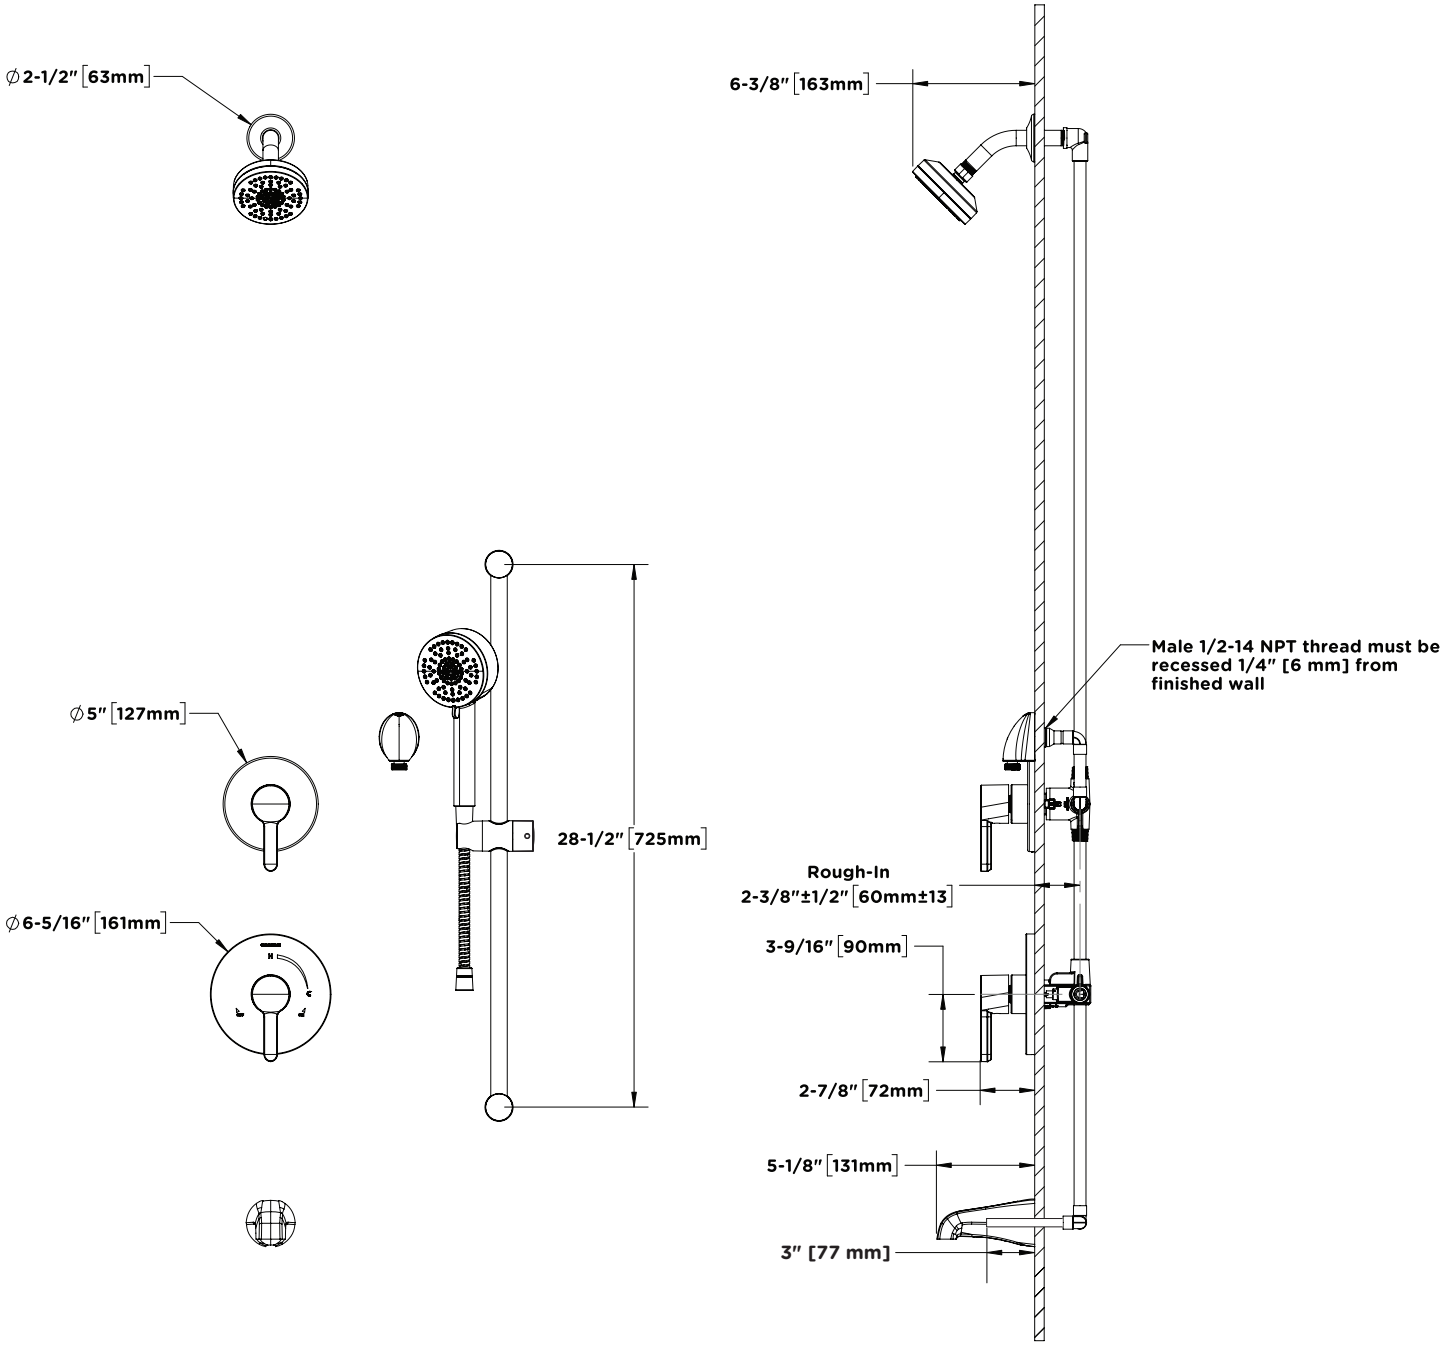

Notes:

1) Valve body and piping not included and shown as reference only.
2) Plaster shield (p/n T-176) for drywall, plaster, or other type walls 1/2" or greater.
3) All dimensions measured from nominal rough-in.
4) Dimensions subject to change without notice.

Copyright © 2026 Symmons Industries, Inc. ▪ symmons.com ▪ gethelp@symmons.com ▪ ZV-4146 REV A ▪ 083126