

BLACK DIAMOND[®]

Project Name: _____

Location: _____

Item #: _____

Qty: _____

Black Diamond 1 Door Reach-In Freezer, 23 Cu. Ft., in Stainless Steel

USFZ-1D



Engineered for high-performance frozen storage, the Black Diamond 1 Door Reach-In Freezer offers commercial kitchens a reliable solution for storing food and ingredients safely. Featuring durable stainless steel construction inside and out to withstand frequent use, this freezer includes a self-closing solid door with recessed handle and 23 Cu. Ft. of cold storage capacity. Three removable wire shelves help organize bulk frozen products, while the front digital temperature controller ensures precise cooling from -8° to 0°F. Automatic defrost and bottom-mounted, slide-out refrigeration improve maintenance and access.

FEATURES AND CONSTRUCTION

- 23 Cu. Ft. storage capacity
- Slide out bottom mounted self-contained refrigeration
- Constructed of heavy-duty stainless steel inside and out
- Temperature range of -8° to 0°F ensures ideal frozen food storage
- Uses R290 refrigeration
- 7' power cord with NEMA 5-15 plug from the back of the unit
- Three removable plastic-coated wire shelves
- Equipped with (4) 4" casters for easy mobility
- Integrated lock provides secure storage

ELECTRIC

115V / 60Hz / 1Ph

Cord Length (Inches): 98.40"

Plug Type: NEMA 5-15P

Cord set included

NEMA 5-15P



3RD PARTY APPROVALS



STORAGE CAPACITY

- Cubic Feet: 23.1 Cu. Ft.

WARRANTY (USA / CANADA)

Two (2) Year Limited Warranty on Parts and Labor, Five (5) Year Warranty on Compressor and Evaporator

Contact us for details at 1.877.368.2797






TEMPERATURE

- Holding Temperature (Fahrenheit): -8° - 0°

These models are designed to operate in an environment where temperature and humidity do not exceed 75°F (24°C) and 55% relative humidity

FRONT

SIDE

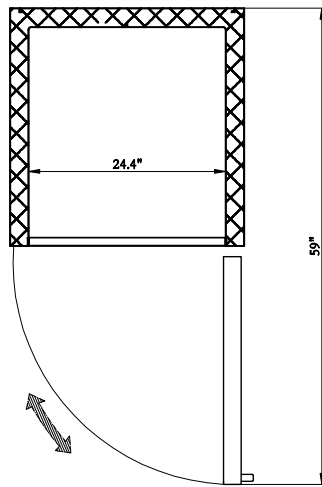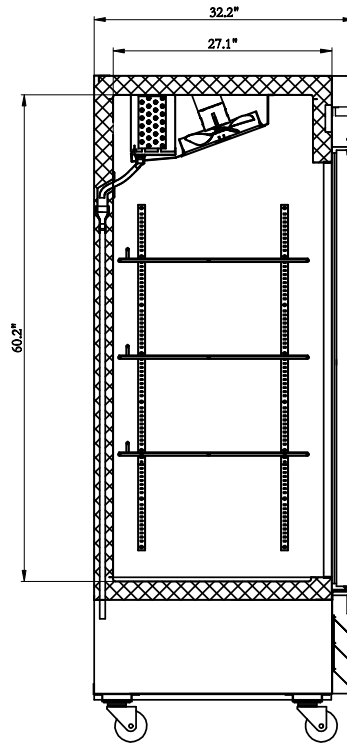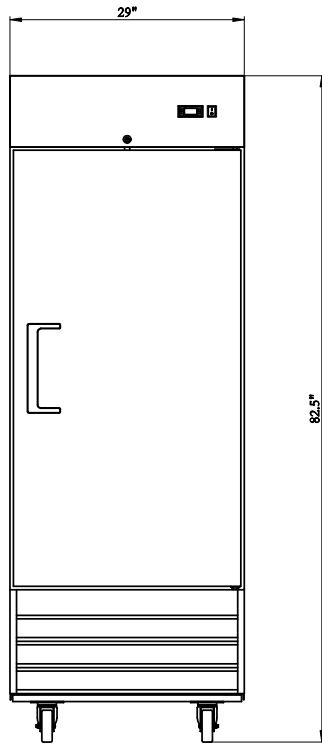

TOP

Reach-In

Doors	Shelves	Amps	HP	Refrigerant	Assembled Dimensions (in)	Item Weight (lbs)	Shipping Weight (lbs)
1	3	4.2A	3/4	R290 4.0595	29.00" x 32.20" x 82.50"	281.6	345.0

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this document are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.