



Lemnos



Colors

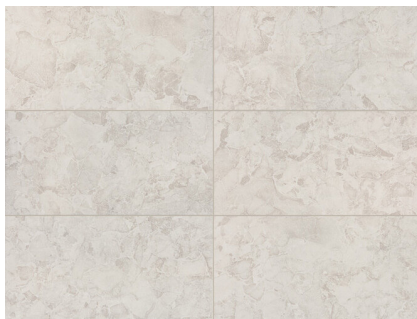


White | VTL LMWH

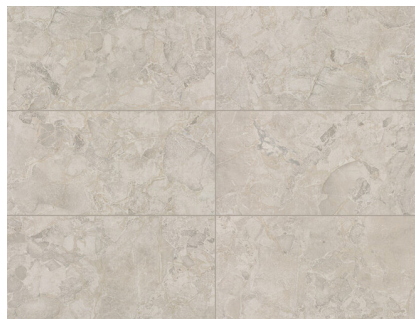

Taupe | VTL LMTA



Gray | VTL LMGY

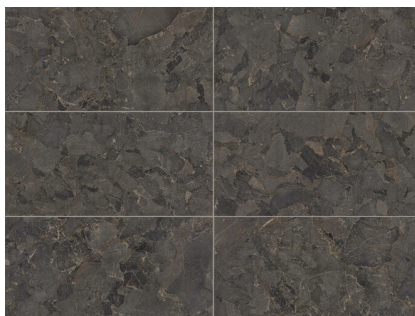


Black | VTL LMBK


Sizes



24" x 48" x 7.98mm



24" x 24" x 7.98mm



12" x 24" x 7.98mm

Field Tiles*

SIZE	ACTUAL	THICKNESS	FINISH
24" x 48"	23.38" x 46.94"	7.98mm	Matte/Natural
24" x 24"	23.38" x 23.38"	7.98mm	Matte/Natural
12" x 24"	11.63" x 23.38"	7.98mm	Matte/Natural
* Not all sizes/trims are available in all colors and finishes, scan QR code for product details.			

Mosaics & Coordinating Trims*

SIZE	ACTUAL	FINISH
2" x 4" Trapezoid Mosaic	11.20" x 12.25"	Matte/Natural
12" x 24" Wave Decorative	11.63" x 23.38"	Matte/Natural
3" x 24" Bullnose	3.00" x 24.00"	Matte/Natural
6" x 12" Cove Base	6.00" x 12.00"	Matte/Natural
1" x 12" Jolly	0.50" x 12.00"	Matte/Natural
1" x 6" Cove Base Outcorner	1.00" x 6.00"	Matte/Natural
Recommended Grout Joint: 1/8" - Rectified 3/16" - Non Rectified		

Product Characteristics

	MATTE/NATURAL
Breaking Strength (ASTM C648 or ISO 10545-4)	> 275lbs
Chemical Resistance (ASTM C650 or ISO 10545-13)	Resistant
DCOF	≥ 0.42
Deep Scratch Resistance - Unglazed (ISO 10545-6)	N/A
Frost Resistance (ASTM C1026 or ISO 10545-12)	N/A
Mohs Hardness - EN101	8
Water Absorption (ASTM C373 or ISO 10545-3)	< 0.5%
Certifications	N/A
Country of Origin	USA
Shade Variation Code	V4

Application**

		WALL	FLOOR
Interior	Residential	•	•
Interior	Commercial	•	•
Interior	Heavy Commercial	•	
Exterior	Residential/Commercial		

** These recommendations are not defined by ANSI Standards

Material

Color-Body Porcelain



V4 Substantial Variation



Water Absorption: < 0.5%



Made in USA



Recommend an offset pattern ≤33%



DCOF: ≥ 0.42



Scan QR Code for Product Information and Installation Images

Request samples.

www.vitlsurfaces.com
samples@vitlsurfaces.com

