

SAFETY INFORMATION

Please read and understand this entire manual before attempting to assemble, install or operate the product.

WARNING

- RISK OF ELECTRIC SHOCK - Before beginning installation, turn off electricity at the circuit breaker box or the main fuse box.
- RISK OF FIRE - Use bulbs specified by the markings and/or labels on the fixture.
- RISK OF FIRE, ELECTRICAL SHOCK or PERSONAL INJURIES - Use only LED lamps in this luminaire. Do NOT use incandescent and halogen lamps in this luminaire.


CAUTION

- For your safety, read instructions completely before beginning installation.
- If in doubt about electrical installation, consult a licensed electrician.
- Turn off electricity to fixture before replacing the bulb(s).

IMPORTANT

- IDA recommends using long-wavelength lighting with a color temperature of < 3000 Kelvin.

TOOLS REQUIRED

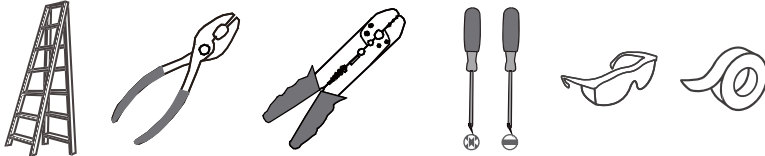


CARE AND MAINTENANCE


- Wipe clean using soft, dry cloth or static duster. Always avoid using harsh chemicals and abrasives to clean fixture as they may damage the finish.

If you need further assistance call Quozel Customer Care at 1-800-645-3184 (9:00am - 5:00pm EST), or visit us on-line at www.quezel.com.

PACKAGE CONTENTS

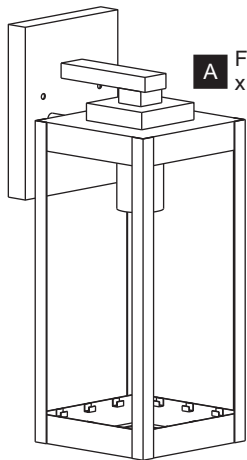

A Fixture Body
x 1




B Glass Panel
x 4

Glass panels may be different than pictured based on which item was purchased.
Glass panels may be pre-assembled on the fixture, depending on which product was purchased.



C Sleeve
x 1

MOUNTING HARDWARE



AA Crossbar Assembly
x 1



BB Alternate Mounting Screw
x 2



CC Wire Connector
x 3



DD Outlet Box Screw
x 2

INSTALLATION

1 Install Glass Panels

If the glass panels on the product you purchased are pre-assembled to the fixture, skip this step and proceed to the next step in the instructions

Slot

Tab

Glass panels may be different than pictured based on which item was purchased.

2 Install Crossbar Assembly

(2) Alternative Screws

*** Alternative screws are provided to replace pre-assembled mounting screws if necessary.**

3 Wiring

White wire from supply White from fixture

Black (or red) wire from supply Black from fixture

Ground wire from supply Ground wire from fixture

Green ground screw

4 Install Fixture Body

5 Install Bulb and Sleeve

Install the correct bulb referring to fixture markings and/or labels for maximum wattage.

Note: *For Dark Sky use the sleeve and the recommended bulb.*

Bulb Type (not included):

Bulb color temperature < 3000 Kelvin

6 Apply Caulking

*** Note: Do NOT caulk the bottom of the backplate to allow moisture to escape.**

Your installation is now complete! Restore electricity and save this sheet for future reference.