

JascoPro Series In-Wall Add-on Switch, Toggle



Specifications

Power: 120/277VAC, 60Hz

Operating Temperature: 32-104° F (0-40° C)


Switch must be mounted indoors

Design Features


- For use in 3-, 4-, 5- or 6-way configurations with JascoPro Series Wi-Fi, Z-Wave or Zigbee in-wall devices
- Requires wiring connections neutral, traveler and ground
- QuickFit – improved components reduce the housing depth by up to 20% compared to previous Wi-Fi models and eliminated the need for heat tabs
- SimpleWire – dual ground ports support daisy-chaining in multi-switch setups
- Connect up to four add-on switches to primary switch
- Maximum traveler wire distance: 300ft. interconnected between four add-on switches
- No more than 75ft. between each switch
- Maximum traveler wire distance between primary and one add-on switch: 200ft.
- Requires JascoPro Series smart control – not a stand-alone switch
- Toggle-style switch to match existing switches
- Uses a standard toggle wallplate – not included

Installation Recommendations:


- Insert wire into port and tighten screw. Do not wrap wire around screw
- Indoor use only
- Wallplates sold separately
- Trilingual instruction manual – English, French, Spanish

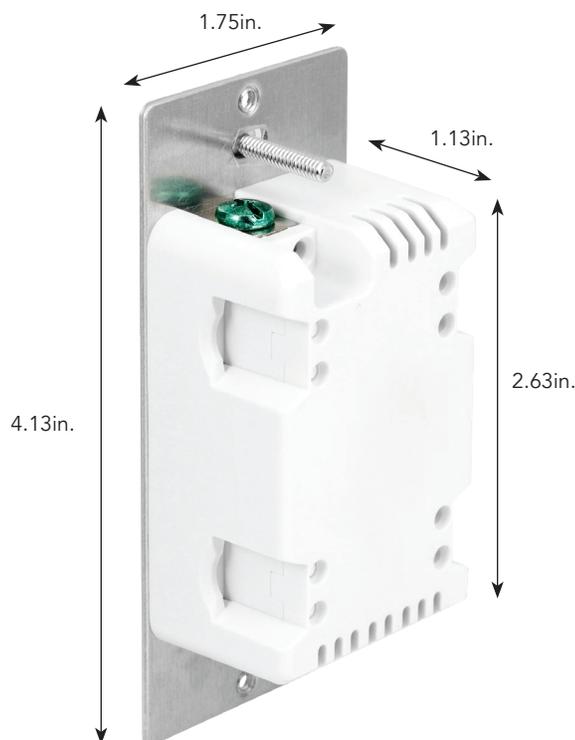

Multi-Location Wiring

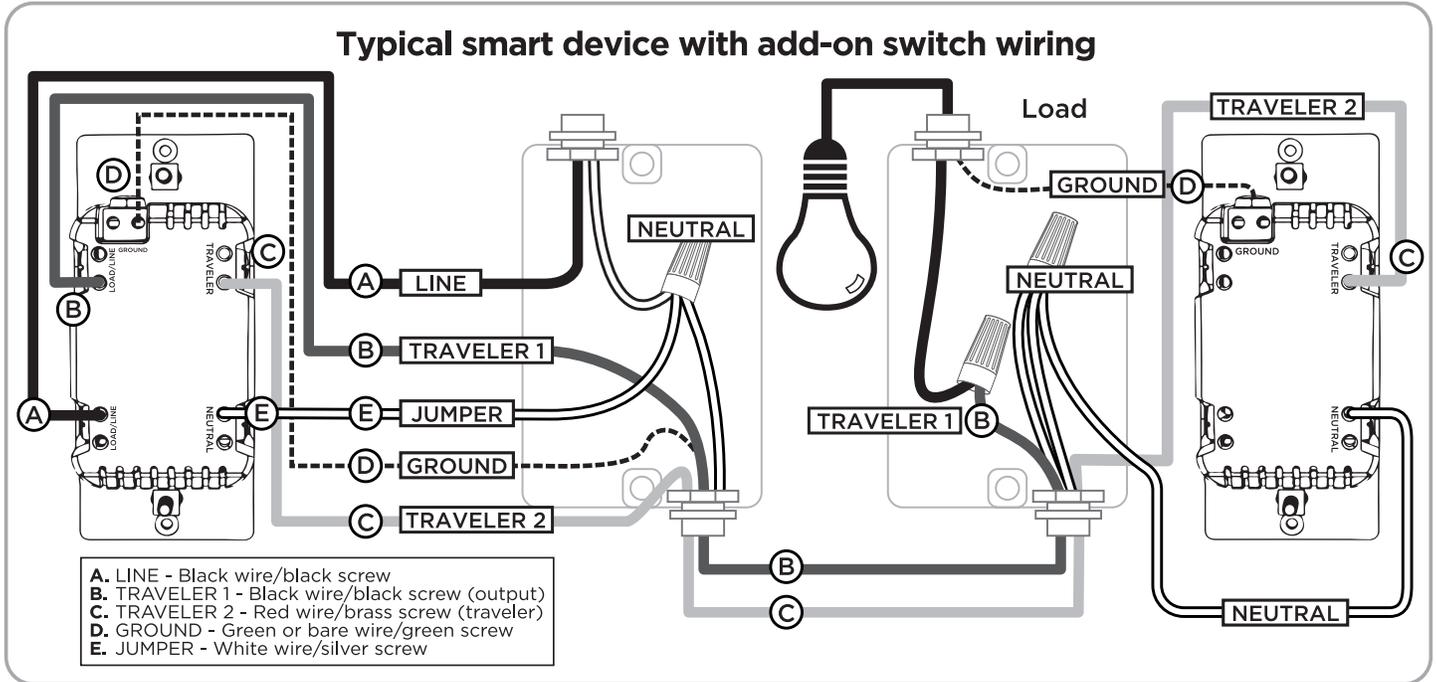

Space-Saving Screw Terminals

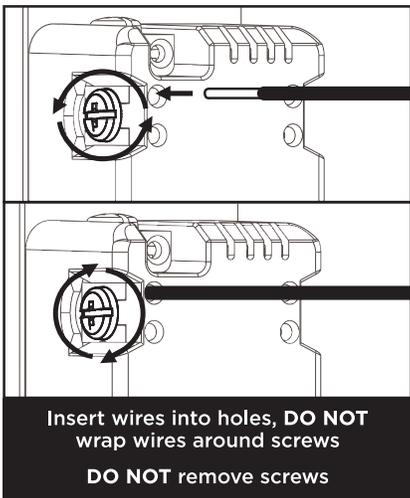

Certifications & Compliances



Compliances, specifications and availability are subject to change without notice.

Distributed by Jasco Products Company LLC
 10 E. Memorial Rd., Oklahoma City, OK 73114.

Questions? Contact our U.S.-based dedicated support at 1-833-981-0170, M-F, 7AM-8PM Central Time.

©Jasco 2023

Related Products - JascoPro Series Z-Wave In-Wall Smart Controls



76598
In-Wall Smart Switch



59384
In-Wall Smart Dimmer



59387
In-Wall Smart Outlet



79244
Plug-in Smart Switch



Scan to see full line of products or visit jascopro.com