



Satin Nickel profile shown
L-0CL-FR-48-SN

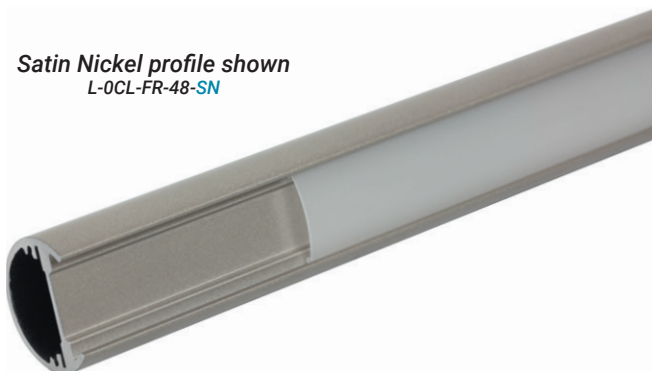


Profile

PART NUMBER	DESCRIPTION	DIMENSIONS	FINISH OPTIONS
L-0LC-FR-48- <i>Finish</i>	48" Lighted Closet Rod Profile with frosted lens.	48" x 1-1/2" x 1-1/4"	Black (BK), Bronze (BZ), Satin Nickel (SN), White (WT)
L-0LC-FR-90- <i>Finish</i>	90" Lighted Closet Rod Profile with frosted lens.	90" x 1-1/2" x 1-1/4"	Black (BK), Bronze (BZ), Satin Nickel (SN), White (WT)

Blue indicates customer choice. Finish indicates fixture finish color.

FINISH OPTIONS



OPTIONAL INSTALLATION COMPONENTS

PART NUMBER	DESCRIPTION	DIMENSIONS
LC9R-CBS- <i>Finish</i>	Center Bracket Support (Use every 48") Available in Black (BK), Bronze (BZ), Satin Nickel (SN) or White (WT)	11-7/8" x 1" x 10-7/8"
LC9R-FS-P- <i>Finish</i>	Flange set for Lighted Closet Rod and profile. Available in Black (BK), Bronze (BZ), Satin Nickel (SN) or White (WT)	3-3/8" x 2-1/2" x 1-1/8"
SG9-WW-48 <i>Color</i>	48" field-cuttable WireWay. Available in Black (BK), Grey (GR), or White (WT)	48" x 3/4" x 11/16"

FEATURES

- Circular Closet Rod – 1-1/4"
- Concealed wire management
- Field trimmable
- Simple to install
- 3-year limited warranty
- Profile with frosted, light-diffusing lens
- Accessories sold separately: WireWay, Center Bracket Support, Flange Set
- 12-volt or 24-volt DC plug-in or hardwired power supply required (order separately)

APPLICATIONS

- Closet
- Stair Railing
- Laundry Room

TECHNICAL INFORMATION

Series	Profiles – Lighted Closet Rod
Cuttable	Yes
Rating	UL & cUL Listed
Mounting	Flange Set (sold separately), Screws (included with flange set)
Environment	Dry, Damp, Wet locations
Construction Material	Extruded aluminum, IR Acrylic (lens)
Warranty	3 years



Lighted Closet Rod Profile

Circular closet rod profile with frosted lens

3YEAR
WARRANTY



COMPATIBLE 12 VOLT TAPE LIGHTING

PART NUMBER	DESCRIPTION	LUMENS PER FOOT	KELVIN TEMPERATURES
L-T600-16-MW	16 ft. roll of tunable white LED Tape Light featuring two-wire TandemLED technology. Protective IP65 rated micro-waterproof coating.	280 (918/M)	Tunable White Light from 2700K – 5000K
L-RGMW300-16-Temp	(2) 8 ft. rolls of 10 mm wide, higher light output, LED Tape Lighting. Protective IP65 rate micro-waterproof coating.	466 (1527/M)	2700K (27), 3000K (30), 4000K (40), 5000K (50)
L-VMW600-16-Temp	16 ft. roll of 8 mm wide, high light output, LED Tape Light. Protective IP65 rate micro-waterproof coating.	225 (738/M)	2700K (27), 3000K (30), 4000K (40), 5000K (50)
L-VMW600-32-Temp	32 ft. roll of 8 mm wide, high light output, LED Tape Light. Protective IP65 rate micro-waterproof coating.	225 (738/M)	2700K (27), 3000K (30), 4000K (40), 5000K (50)
L-V600-100-Temp	16 ft. roll of 8 mm wide, high light output, LED Tape Light. NON-waterproof rated.	225 (738/M)	2700K (27), 3000K (30), 4000K (40), 5000K (50)
L-RMW300-16-Temp	16 ft. roll of 8 mm wide, medium light output, LED Tape Light. Protective IP65 rate micro-waterproof coating.	120 (395/M)	2700K (27), 3000K (30), 4000K (40), 5000K (50)
L-RMW300-32-Temp	32 ft. roll of 8 mm wide, medium light output, LED Tape Light. Protective IP65 rate micro-waterproof coating.	120 (395/M)	2700K (27), 3000K (30), 4000K (40), 5000K (50)
L-DMW150-16	16 ft. roll of 8 mm wide, multi-color light output, LED Tape Light. Protective IP65 rate micro-waterproof coating.	49 (160/M)	2700K (27), 3000K (30), 4000K (40), 5000K (50)
L-RGB-M300-16	32 ft. roll of 8 mm wide, multi-color light output, LED Tape Light. Protective IP65 rate micro-waterproof coating.	260 (854/M)	Multi-Color Changing
L-RGBM300-32	32 ft. roll of 8 mm wide, medium light output, LED Tape Light. Protective IP65 rate micro-waterproof coating.	260 (854/M)	Multi-Color Changing

COMPATIBLE 24 VOLT TAPE LIGHTING

PART NUMBER	DESCRIPTION	LUMENS PER FOOT	KELVIN TEMPERATURES
L-T24-16-MW	16 ft. roll of tunable white LED Tape Light featuring two-wire TandemLED technology. Protective IP65 rated micro-waterproof coating.	280 (918/M)	Tunable White Light from 2700K – 5000K
L-VMW24-16-Temp	16 ft. roll of 8 mm wide, high light output, LED Tape Light. Protective IP65 rate micro-waterproof coating.	225 (738/M)	2700K (27) 3000K (30) 4000K (40)
L-RMW24-16-Temp	16 ft. roll of 8 mm wide, medium light output, LED Tape Light. Protective IP65 rate micro-waterproof coating.	120 (395/M)	2700K (27) 3000K (30) 4000K (40)