

CAUTION: Read instructions carefully and turn electricity off at main circuit breaker panel before beginning installation.

P2630

WARNING - If any Special Control Devices are used with this Fixture, Follow the Instructions Carefully to assure full compliance with N.E.C. requirements. If there are any questions, contact a Qualified Electrical Contractor.

CAUTION - All glass is fragile, use care when handling Glass component(s) and or Lamp(s).

1. SAFETY PRECAUTIONS:

WARNING: To avoid fire, shock, and personal injury, follow all instructions carefully. Read your Owner's Manual carefully before installing the ceiling fan control. Retain Owner's Manual for future references.

2. To avoid possible electrical shock, be sure electricity is turned off at the main fuse box or circuit breaker panel before wiring.
3. This control is designed to operate only one ceiling fan and light kit. **If your ceiling fan is equipped with a variable speed and light ON/OFF pull chain switch controls, make sure to set the speed control at the highest speed and the light to the ON position before installing the wall control. This will avoid erratic speeds and possible damage to your ceiling fan.**
4. Make certain no bare wires are exposed outside the connectors.
5. All wiring must be conform to National and Local Electrical Codes. If you feel you do not have enough electrical wiring knowledge or experience, have your fan control installed by a licensed electrician. Any electrical work not described in this manual should be performed by a licensed electrician.
6. Use of this control with some ceiling fan could result in fire, shock, and serious personal injury. Use this fan control only with capacitor speed controlled ceiling fans only.

INSTALLATION:

NOTE: Installation of this control requires that the three-conductor cable with ground wire be run between the control wall box and the ceiling fan outlet.

1. After electricity has been turned off at the main fuse box or circuit breaker panel, remove the existing wall plate and switch.
2. Proceed to make the wire connections as follows (make sure the fan and light slide switches of the wall control are set in the "OFF" position); Connect the solid Black wire from the wall control to the Black wire from the fan. Connect the Blue wire from the wall control to the Red or Blue wire from the fan. Connect the Black with White stripes wire from the wall control to the 120V AC hot wire. Use wire connectors provided to secure the connections.

If your outlet box has a ground wire (green or bare copper), connect the wall transmitter's ground wire to it; otherwise connect the wall transmitter's ground wire directly to one of the screws from the outlet box.


NOTE: Refer to the Schematic on the back of the wall control.

3. Secure the P2630 wall control to the outlet box using the two 6-32" x 3/4" screws provided.
4. Secure the face plate over the wall control with the two 6-32" x 1/4" screws provided.


WARNING! HOOK UP "IN SERIES" ONLY!

Do not connect to hot and common wire electric circuit or switch will be damaged. Refer to diagram in Fig. 1.

WARNING! HOOK UP "IN SERIES" ONLY!
Do not connect to hot and common wire of electric circuit or switch will be damaged. Refer to diagram below.

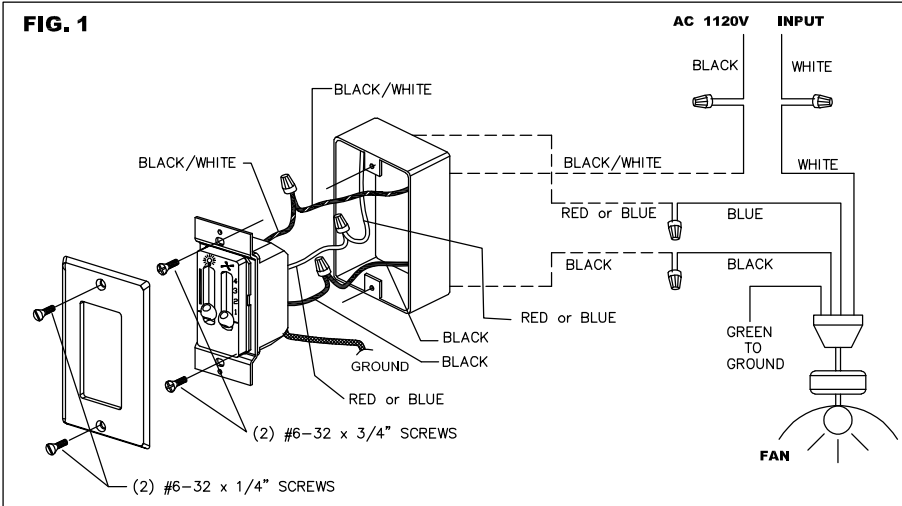

AVERTISSEMENT! CONNECTEZ UNIQUEMENT "EN SERIE"!
Ne pas connecter au fil commun et d'alimentation du circuit électrique ou dégâts au commutateur en résultera. Consultez le diagramme ci-dessous.

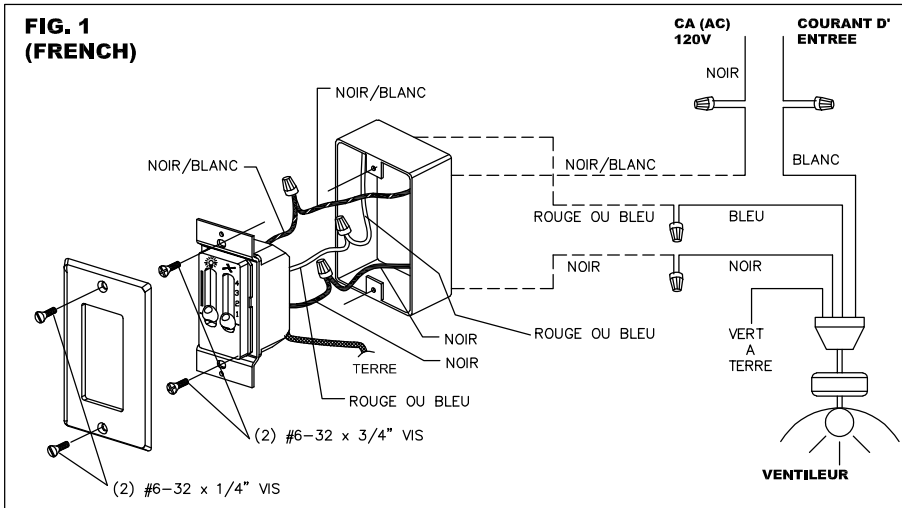

¡AVISO! CONECTAR ÚNICAMENTE "EN SÉRIE"
No conectar con el cable común o del suministro del circuito eléctrico para evitar daños en el interruptor. Consulte el diagrama.

