




Location:



35EX-RD2

Exposed Shower Riser


Specification Submittal

Feature Highlights	Model Numbers
<ul style="list-style-type: none"> • 1 mode rain showerhead • 3 mode hand shower • 60" flexible metal hose • Backflow prevention • Diverter included for toggling between hand shower and showerhead • Includes column/slide bar and hand shower bracket • 2.0 gpm (7.6 L/min) standard flow restrictor • Components shall be metal and nonmetallic construction, plated in standard polished chrome finish • For optional in-line vacuum breaker order p/n EF-109 	<input type="checkbox"/> 35EX-RD2 Exposed Shower Riser with Hand Shower and Showerhead <hr/> Compliance - ASME A112.18.1/CSA B125.1 
Options/Modifications	Warranty
<input type="checkbox"/> -1.5  1.5 gpm (5.7 L/min) flow restrictor <input type="checkbox"/> -STN Satin Nickel finish Note: Append appropriate -suffix to model number.	Limited Lifetime - to the original end purchaser in consumer/residential installations. 10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information. 

Architectural/Engineering Specification

Symmons Dia Exposed Shower Riser _____ Includes 1 mode rain showerhead, 3 mode hand shower, 60" flexible metal hose, Backflow prevention, Diverter included for toggling between hand shower and showerhead, Includes column/slide bar and hand shower bracket, 2.0 gpm (7.6 L/min) standard flow restrictor, Components shall be metal and nonmetallic construction, plated in standard polished chrome finish, For optional in-line vacuum breaker order p/n EF-109. 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1 compliant. Available options: "1.5 - 1.5 gpm (5.7 L/min) flow restrictor", "STN - Satin Nickel finish".

Dimensions

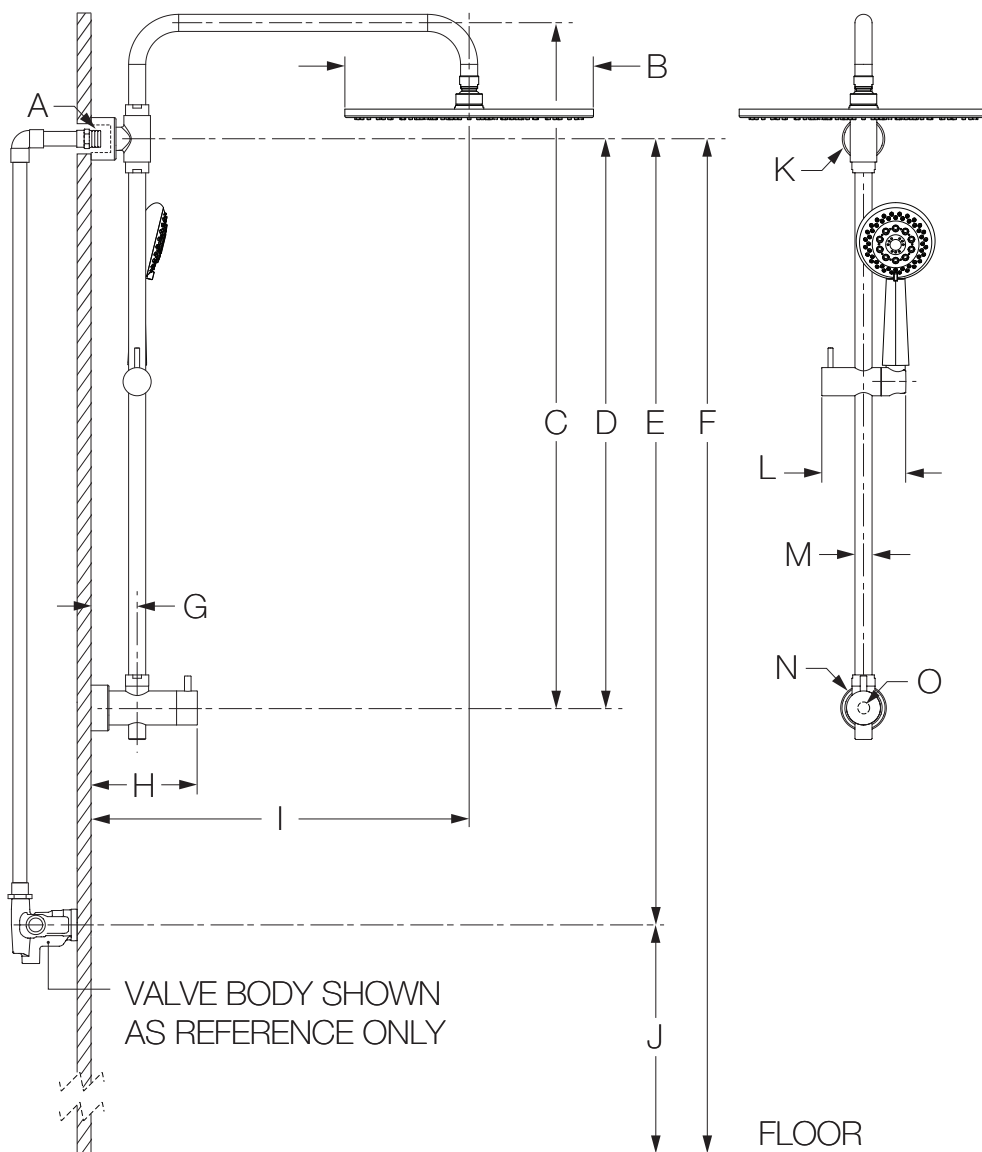

Important Notes:

- 1) If the distance for item E is less than 29" (737 mm), Exposed Shower Riser is not appropriate for your application.
- 2) Hand shower wands that exceed 0.8 lbs. are not recommended for Exposed Shower Riser.

Measurements

A	Male 1/2" NPT thread must protrude 1/2" (13 mm) from finished wall
B	Ø 11-3/4", 298 mm
C	27-1/2", 699 mm
D	22", 559 mm
E	For Shower Systems: Min. 29", 737 mm from centerline of shower output to valve For Tub/Shower Systems: Min. 29", 737 mm from centerline of shower output to valve
F	Ref. 77", 1956 mm
G	2-3/16", 55 mm
H	5-1/16", 128 mm
I	17-15/16", 456 mm
J	For Shower Systems: Min. 42", 1067 mm Max. 48", 1219 mm For Tub/Shower Systems: Ref. 32", 813 mm
K	Ø 2", 51 mm
L	4", 102 mm
M	Ø 13/16", 21 mm
N	Ø 2-3/16", 56 mm
O	Hole Size Ø 5/16", 8 mm

Note: Dimensions subject to change without notice.