

## Features

- One-piece, self-contained ceramic disc valve allows for both volume and temperature control
- 360° swivel spout with 9" (229 mm) clearance
- Quarter-turn washerless ceramic disc valve for filtered water
- Separate lever handle and filtration inlet hose for cold filtered water
- Contemporary European styling
- Flexible supplies
- 2.0 gpm (7.6 lpm) maximum flow rate at 60 psi (4.14 bar)

## Material

- Brass

## Installation

- Single-hole mounting
- Flexible connections for easy installation



**ADA** **CSA B651**

## Codes/Standards

ASME A112.18.1/CSA B125.1  
NSF/ANSI/CAN 61  
NSF/ANSI/CAN 372  
DOE - Energy Policy Act 1992  
ADA  
ICC/ANSI A117.1  
CSA B651

## KOHLER® Water Filter Systems Five-Year Limited Warranty


See website for detailed warranty information.

## Available Colors/Finishes

*Color tiles intended for reference only.*

### Color Code Description

	CP	Polished Chrome
---	----	-----------------

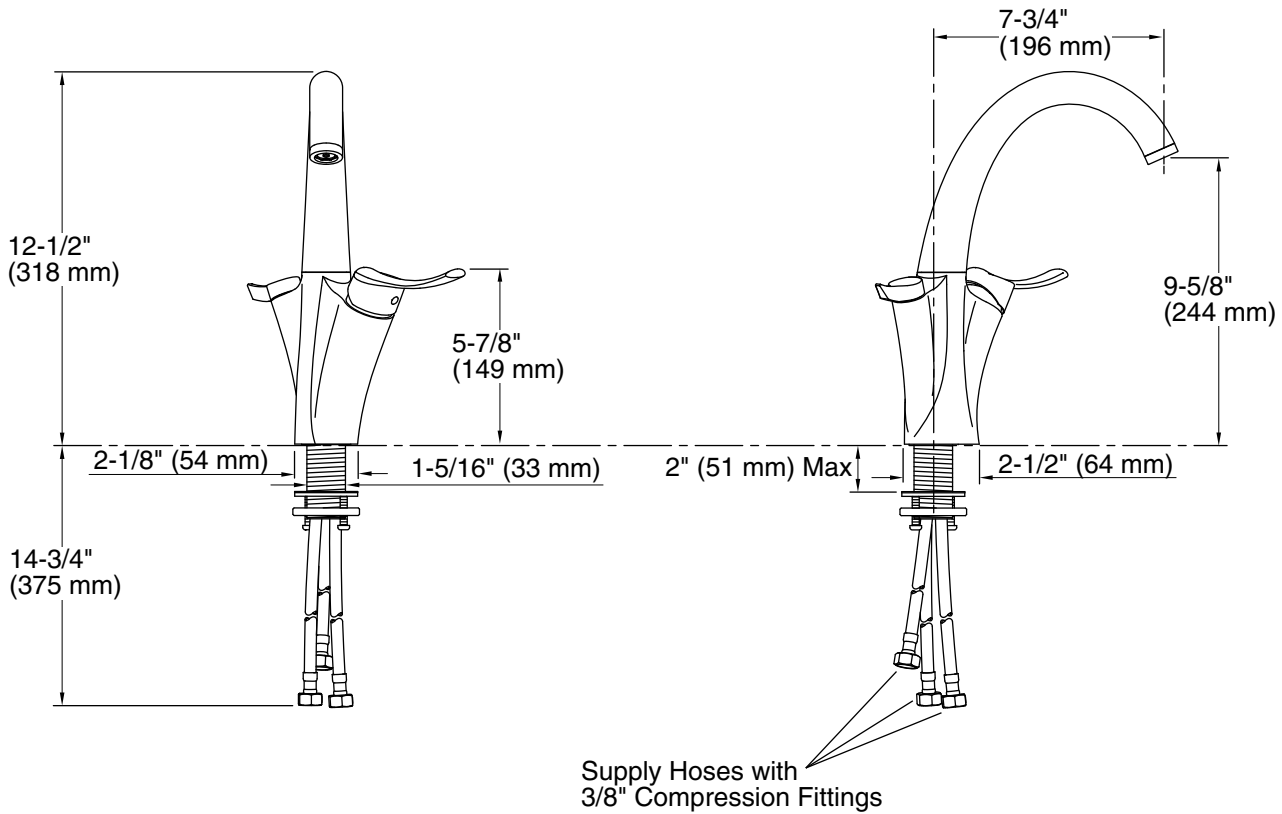

### Technical Information

All product dimensions are nominal.

Faucet flow rate: 2 gal/min (7.6 l/min)

### Spout:

Spout reach: 7-3/4" (197 mm)

### Notes

Install this product according to the installation guide.

This product is not for use with instant hot water systems.

ADA compliant for faucet handles only

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.