



# ASSEMBLY AND INSTALLATION INSTRUCTIONS

VL35122 / VL35123 / VL35124

**WARNING:** TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

**NOTES:** 1. Before installing, consult local electrical codes for wiring and grounding requirements.  
2. Read and save these instructions.

## Hardware Package (included):

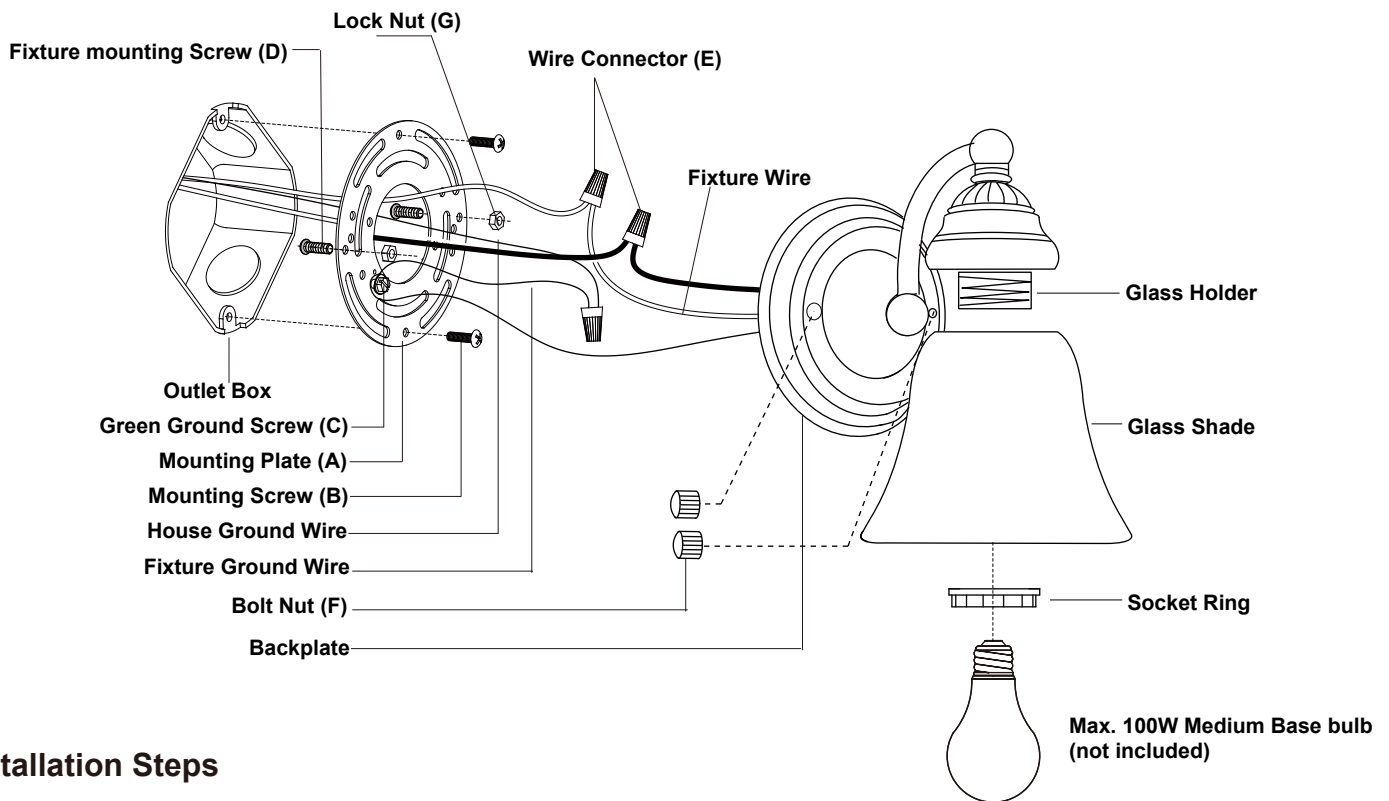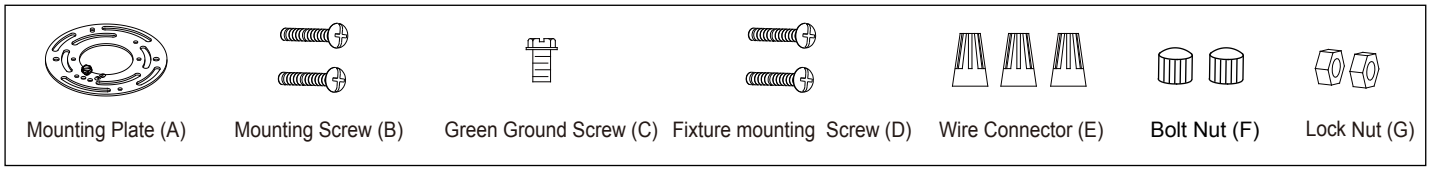

## Installation Steps

Turn off the power at fuse or circuit box.









1. Thread two fixture mounting screws (D) through the mounting plate (A), and secure them with two lock nuts (G). Adjust the length of the screws if necessary.  
**Note: Two sizes of screws, 3/4" L and 1" L, are attached in the hardware package, please choose one to suit your need.**
2. Attach the mounting plate (A) to the outlet box by using two mounting screws (B).
3. Pull out the source wires from the outlet box. Make wire connections using wire connectors (E) as follow:  
---Connect the hot wire (black insulation) from the fixture to the black wire from the power source.  
---Connect the neutral wire (white insulation) from the fixture to the white wire from the power source.  
---Attach the fixture ground wire (bare wire) to the mounting plate (A) with the green ground screw (C) , and then connect it to the house ground wire with the wire connector (E) .  
Carefully put the wires back into the outlet box.

4. Attach the fixture to the mounting plate (A) by inserting fixture mounting screws (D) into holes on fixture, and then secure it with two bolt nuts (F).
5. Attach the glass shade to the glass holder, then secure it with the socket ring.
6. Install 1 x 100W Max. medium base bulbs (not included). Check relamping label at socket area or packaging for maximum wattage allowed.


**Turn on the power at fuse or circuit box.**

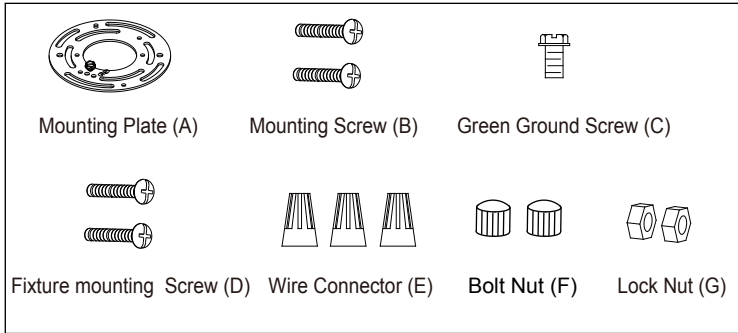The following parts are available for reorder if damaged or missing.


**Spare Parts List:**

 Mounting Plate (A)	 Mounting Screw (B)	 Green Ground Screw (C)
 Fixture mounting Screw (D)	 Wire Connector (E)	 Bolt Nut (F)
	 Lock Nut (G)	 Glass Shade 10360CS


Assembly Kit  
 6675MM (1 SET)  
 for VL35122A / VL35123A / VL35124A  
 6676MM (1 SET)  
 for VL35122BN / VL35123BN / VL35124BN  
 6677MM (1 SET)  
 for VL35122OBB / VL35123OBB / VL35124OBB






**VL35122**  
A: 7" B: 13" C: 7"

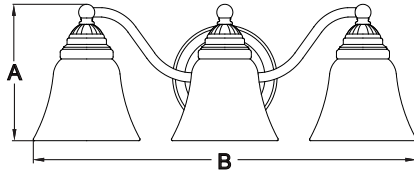

**VL35123**  
A: 7" B: 19" C: 7"

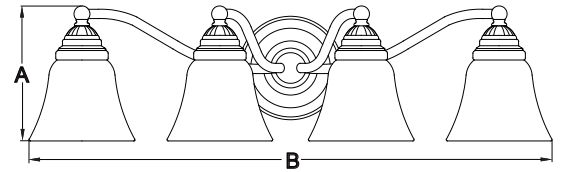

**VL35124**  
A: 7" B: 26" C: 7"

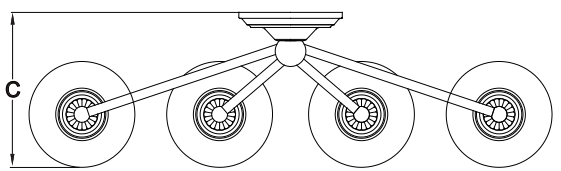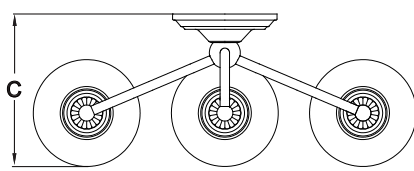

### 1 Year Warranty

Vaxcel warrants all of our products against defects in workmanship and finishes for one year following the date of shipment.

*Exclusions: This warranty does not include the failure of products from extreme acts of nature; environmental conditions not suited for the products intended use; operation in temperatures outside of the range specified in the instruction manual; usage with improper power supply, power surges or dips. For coastal locations, some corrosion is considered normal for the environment.*

*Vaxcel reserves the right to repair, replace or issue a credit for any properly installed product, provided it is returned per RMA instruction. This warranty is limited to the cost of the product only and does not extend to transportation, installation or replacement costs.*

How can warranty service be obtained?

info@vaxcel.com  
1-800-482-9235



230406