
EcoStone SUSTAINABLE LIFESTYLE







EcoStone

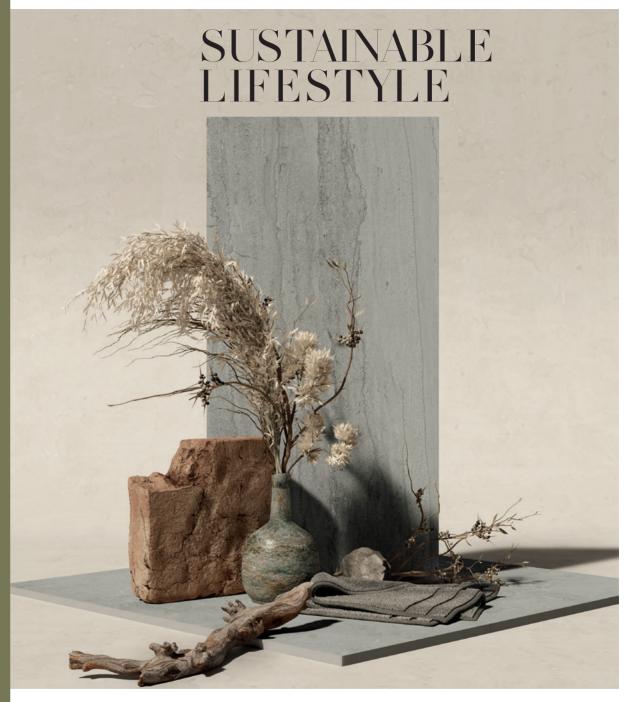



EcoStone elevates a **sustainable lifestyle** that revolves around our many environments. For lifestyles that **value design**, **beauty**, **and sustainability**, **EcoStone offers a larger contribution**.

A contribution to design with the impact of large format; to beauty for any environment with the versatility of stone looks; and to a sustainable lifestyle through carbon neutrality.

The same effort that we put into design, we put into caring for the environment.

This is MILE®stone taking steps, and responsibility.

EcoStone pays homage to the timeless beauty of travertine with two distinctive surface finishes inspired by different cutting techniques.

Cross-Cut, which emphasises the cloudlike patterns that make this prestigious natural material unique, and **Vein-Cut**, showing the banding and linear lines of the veining in the natural material.

2 SURFACES





5 COLORS













.4.

FOG



1104329 RECTIFIED MATTE 12"x24"

1104298 RECTIFIED MATTE 24"x48"

RECTIFIED MATTE 48"x48"

MOSAIC (2"x2") RECTIFIED MATTE 12"x12"

1104349 BULLNOSE RECTIFIED MATTE 3"x12" JUTE



1104330

1104299

RECTIFIED MATTE 24"x48"

1104395

RECTIFIED MATTE 48"x48"

1104345

MOSAIC (2"x2") RECTIFIED MATTE 12"x12"


BULLNOSE RECTIFIED MATTE 3"x12" **MIST**



FOSSIL



PUMICE



1104344

RECTIFIED MATTE 12"x24"

1104350

1104300

1104331

RECTIFIED MATTE 24"x48"

RECTIFIED MATTE 12"x24"

1104396

MIST

1104336

1104305

1104341

1104356

BULLNOSE

MOSAIC (1"x3")

RECTIFIED MATTE 12"x24"

RECTIFIED MATTE 24"x48"

RECTIFIED MATTE 12"x12"

RECTIFIED MATTE 3"x12"

RECTIFIED MATTE 48"x48"

1104346

MOSAIC (2"x2") RECTIFIED MATTE 12"x12"

1104351 BULLNOSE

RECTIFIED MATTE 3"x12"

1104332

RECTIFIED MATTE 12"x24"

1104301

RECTIFIED MATTE 24"x48"

1104397

RECTIFIED MATTE 48"x48"

1104347 MOSAIC (2"x2")

RECTIFIED MATTE 12"x12" 1104352

BULLNOSE RECTIFIED MATTE 3"x12" 1104333

RECTIFIED MATTE 12"x24"

1104302

RECTIFIED MATTE 24"x48"

1104398

RECTIFIED MATTE 48"x48"

1104348

MOSAIC (2"x2") RECTIFIED MATTE 12"x12"

1104353 BULLNOSE

RECTIFIED MATTE 3"x12"

FOG



1104334

RECTIFIED MATTE 12"x24"

RECTIFIED MATTE 24"x48"

1104339 MOSAIC (1"x3") RECTIFIED MATTE 12"x12"

1104354 BULLNOSE

RECTIFIED MATTE 3"x12"

JUTE



1104335

RECTIFIED MATTE 12"x24"

1104304

RECTIFIED MATTE 24"x48"

1104340

MOSAIC (1"x3") RECTIFIED MATTE 12"x12"

1104355 BULLNOSE

RECTIFIED MATTE 3"x12"

FOSSIL



PUMICE

RECTIFIED MATTE 12"x24"

MOSAIC (1"x3")

RECTIFIED MATTE 24"x48" 1104342

RECTIFIED MATTE 12"x12"

1104357

BULLNOSE RECTIFIED MATTE 3"x12" 1104338

RECTIFIED MATTE 12"x24"

RECTIFIED MATTE 24"x48"

1104343

MOSAIC (1"x3") RECTIFIED MATTE 12"x12"

1104358 BULLNOSE

RECTIFIED MATTE 3"x12"

48x110 CROSS-CUT



.8.











SUSTAINABLE LIFE

STYLE





FAÇADE



Installing LED lights can lower consumption and improve energy efficiency by as much as 75% - 90%.





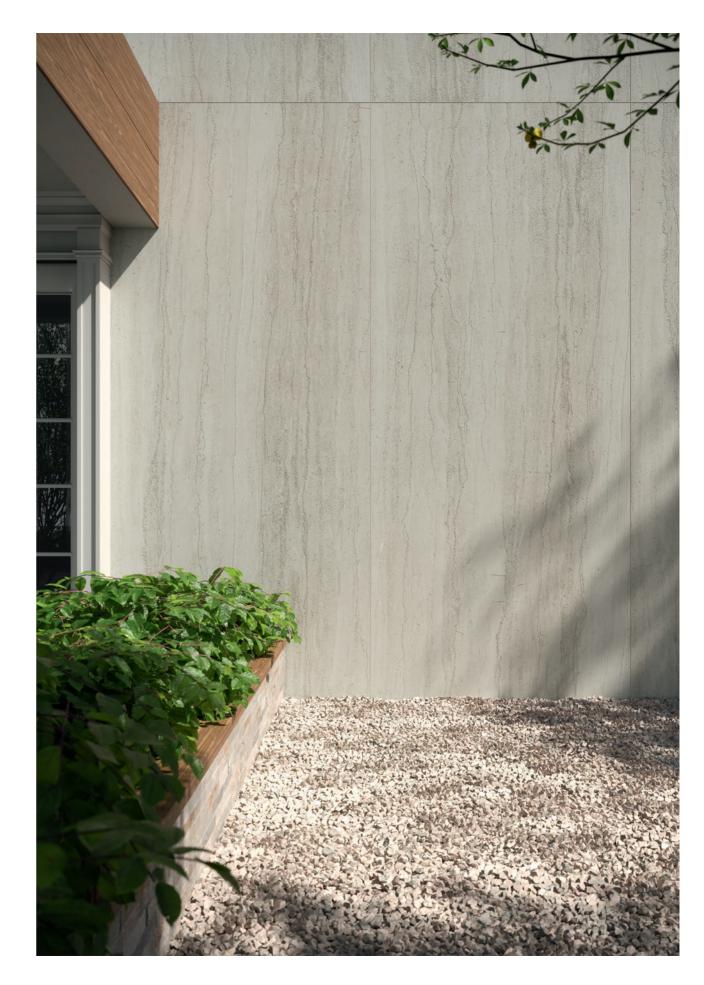

.16.






Wall EcoStone_48"x110"_Pumice_Cross-Cut

COMMERCIAL



Talk about Eco-friendly - Porcelain Tile is the most durable material that can be used as a surface. It is the most cost-effective flooring option in the long run, and consequently the most sustainable choice.

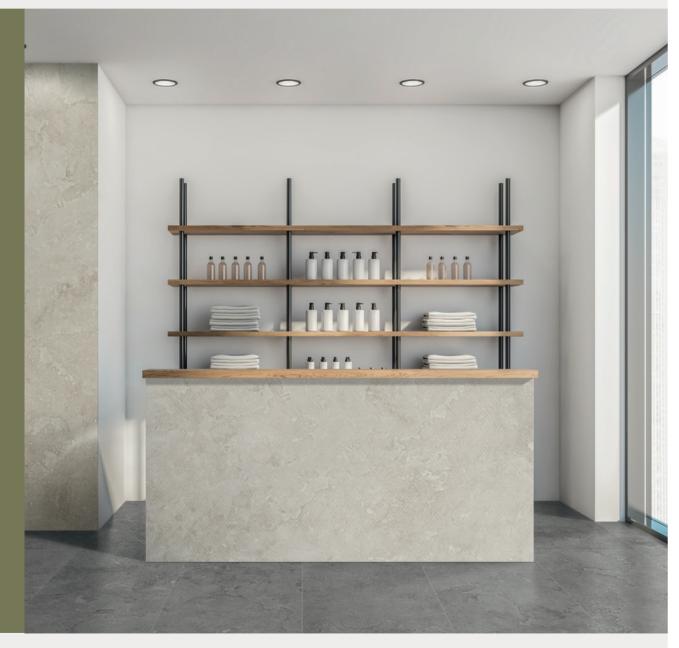

Floor EcoStone_24"x48"_Pumice_Cross-Cut Wall EcoStone_48"x110"_Mist_Cross-Cut EcoStone_48"x110"_Mist_Chevron_Deco





Floor EcoStone_24"x48"_Fog_Vein-Cut Wall EcoStone_48"x110"_Fog_Vein-Cut

. 22 .


LIVING




MILE® stone contributes to the annual removal of > 5000 Metric Tonnes of CO₂ from the Atmosphere.



Floor EcoStone_48"x48"_Fossil_Cross-Cut Wall EcoStone_48"x110"_Pumice_Vein-Cut

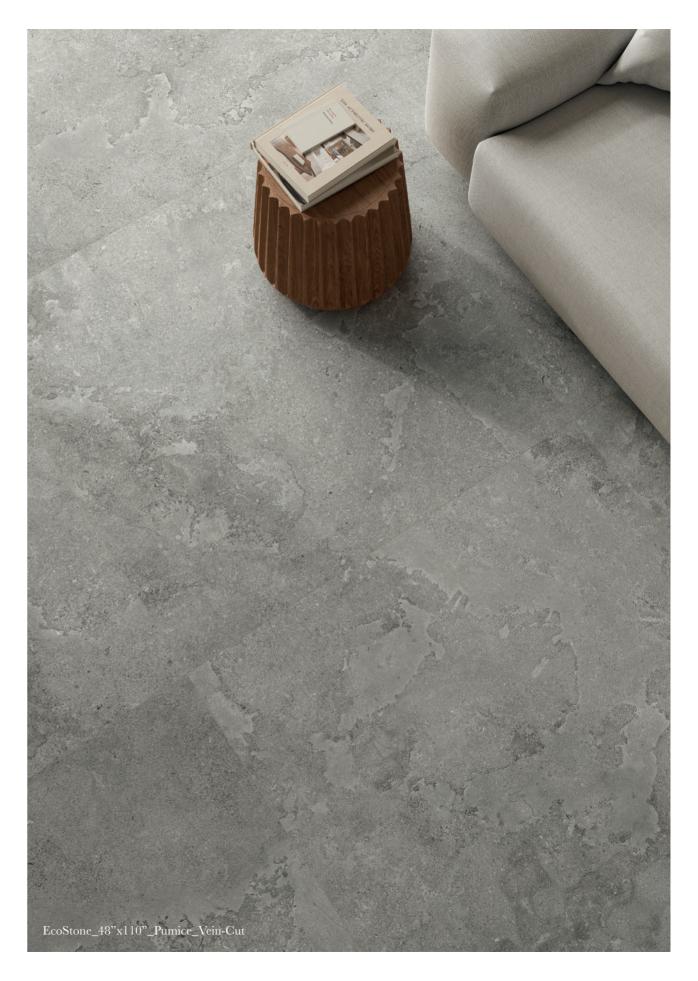



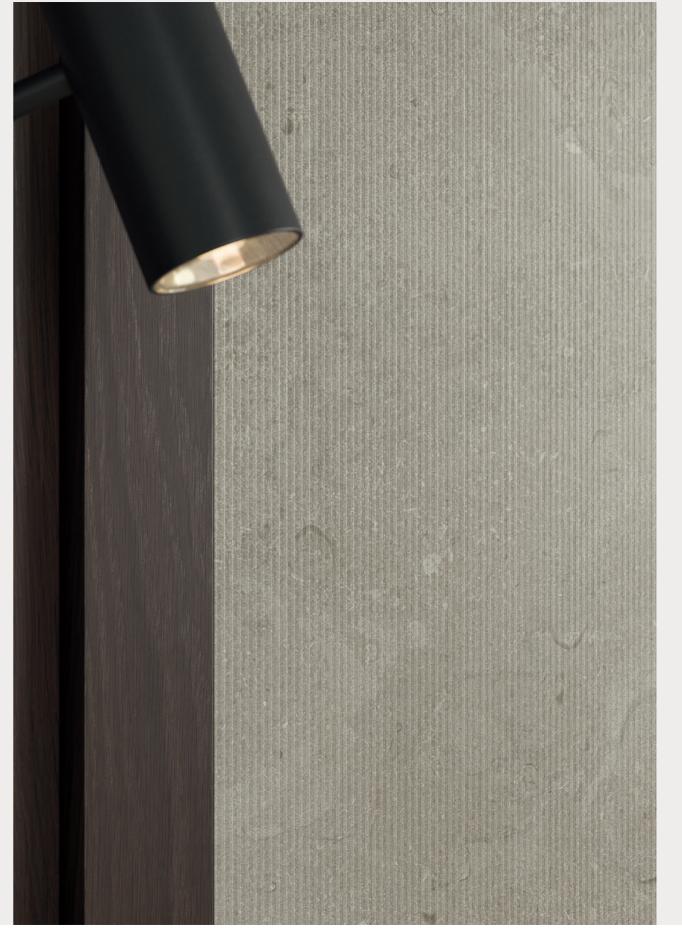


KITCHEN



MILE®stone uses local and regional raw materials that are non-flammable and contain no VOCs for better air quality.



Floor EcoStone_24"x48"_Jute_Cross-Cut Wall EcoStone_48"x110"_Fossil_Vein-Cut

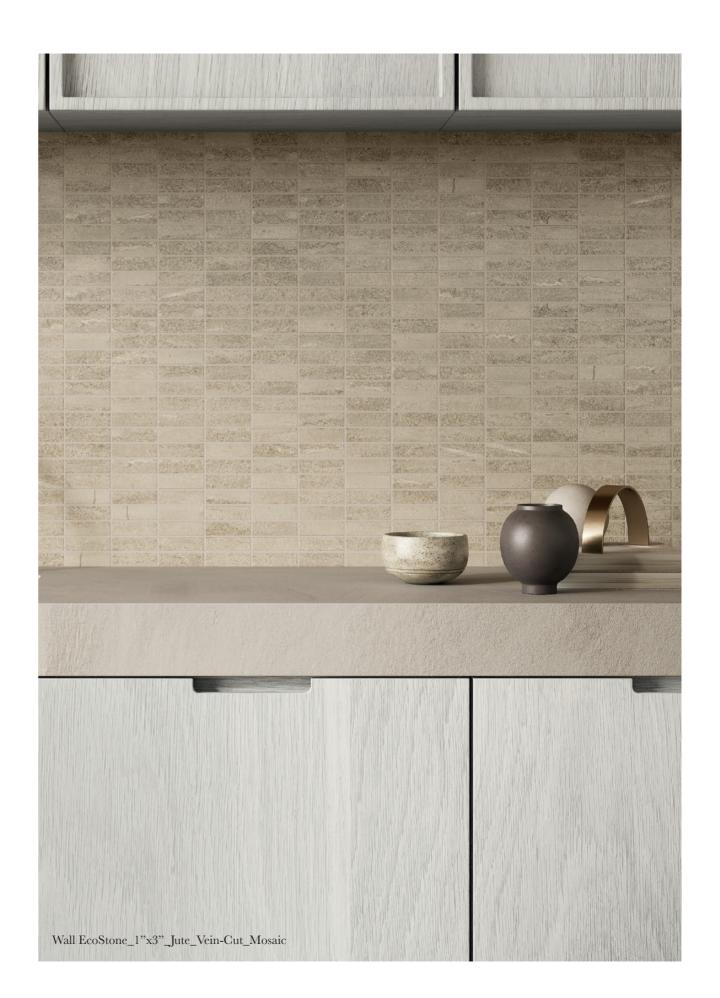



. 28 .

BATHROOM



Using MILE® stone tiles results in the lowest embodied carbon flooring, that will serve the full life of your project.

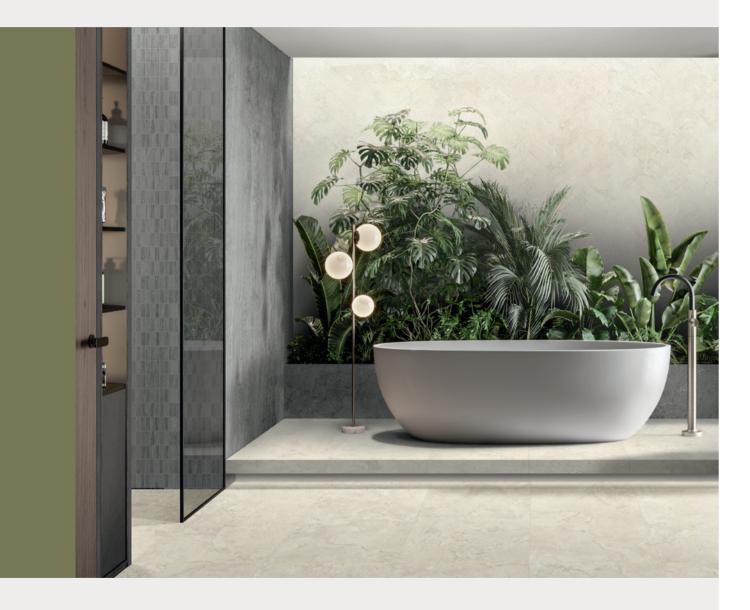

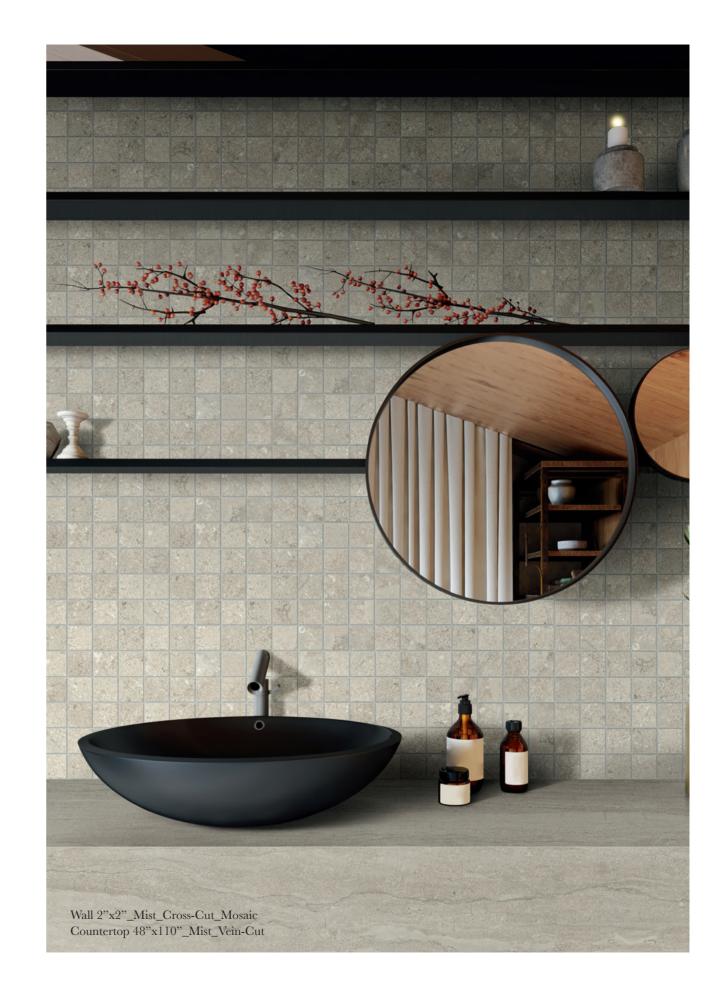


. 30 .







. 34 .





CROSS-CUT

Colors	12"x24" 8 mm	24"x48" 8 mm	48"x48" 8 mm	48"x110" 6 mm	48"x110" DECO 6 mm	12"x12" mosaic (2"x2") 8 mm	Bulinose 3"x12" 8 mm
FOG	1104329	1104298	1104394	1104374	Chevron 1104384 Flute 1104386	1104344	1104349
JUTE	1104330	1104299	1104395	1104375	-	1104345	1104350
MIST	1104331	1104300	1104396	1104376	Chevron 1104385 Flute 1104387	1104346	1104351
FOSSIL	1104332	1104301	1104397	1104377	-	1104347	1104352
PUMICE	1104333	1104302	1104398	1104378	-	1104348	1104353

VEIN-CUT

Colors	12"x24" 8 mm	24"x48" 8 mm	48"x110" 6 mm	12"x12" mosaic (1"x3") 8 mm	Bullnose 3"x12" 8 mm
FOG	1104334	1104303	1104379	1104339	1104354
JUTE	1104335	1104304	1104380	1104340	1104355
MIST	1104336	1104305	1104381	1104341	1104356
FOSSIL	1104337	1104306	1104382	1104342	1104357
PUMICE	1104338	1104307	1104383	1104343	1104358

Technical Specifications



This product meets or exceeds all standards described in ANSI A137.1.

	SPECS	TEST METHOD	INDUSTRY STANDARD	MILE®stone VALUES	
	WATER ABSORPTION	ASTM C373	≤0.5%	≤0.4%	
	PORCELAIN TILE 0.5% or less water absorption	ASTM C373	0.5%	Meeting the water absorption criteria of the American national standard PTCA	
*	SURFACE WEAR RESISTANCE	ANSI A137.1	Surface Wear-resistance properties of glazed vitreous and porcelain tiles.	ALL RESIDENTIAL / COMMERCIAL	
	CHEMICAL RESISTANCE	ASTM C650	A tile sample is placed in continuous contact with a variety of chemicals for 24 hours. No sample must show visible defects.	NOT AFFECTED	
×	D.C.O.F. AcuTest®	ANSI	≥0.42 WET	≥0.42 WET	
	A326.3		>0.55 WET 2CM		
*	STAIN RESISTANCE	ASTM C1378	Surfaces are exposed to staining agents for 24 hours followed by four cleaning procedures. Results are recordedpost cleaning.	NOT AFFECTED	
	BREAKING STRENGTH GAUGED PORCELAIN	ASTM C1505	≥175 lbf	≥200 lbf	
<u>Å</u>	BREAKING STRENGTH	ASTM C648	≥275 lbf	≥300 lbf	
	BREAKING STRENGTH OUTDOOR 2CM	ASTM 1505	2000 lbf (10.9 kN)	≥2500 lbf	
**	RESISTANCE TO FREEZE	ASTM C1026	A tile sample is subjected to repeated processes of freezing and thawing. Sample must show no visible defects.	RESISTANT	
	WARPAGE EDGE	ASTM C485	±0.40% or ±0.05 in (±1.8 mm)	± 0.40% Rectified	
	WARPAGE DIAGONAL	ASTM C485	±0.40% or ±0.07 in (±1.8 mm)	± 0.40%	Rectified
H	WEDGING	ASTM C502	±0.25% or ±0.03 in (±0.8 mm) ± 0.25%		Rectified
	WARPAGE EDGE	ASTM C485	±0.50% or ±0.07 in (±1.8 mm)	± 0.50%	Calibrated
	WARPAGE DIAGONAL	ASTM C485	±0.50% or ±0.07 in (±1.8 mm) ± 0.50% Calii		Calibrated
H	WEDGING	ASTM C502	±0.50% or ±0.08 in (±2.0 mm)	± 0.50% Calibrated	
<u></u>	THICKNESS	ASTM C499	Range: ± 0.04 in	≤0.04 in	

Due to the inherent nature of fired porcelain tile, it is important to note that the coefficent of friction may vary within and between product runs.



Green Certifications & Accreditations

DESCRIPTION

	DESCRIPTION
Secreted Cove	Defines post-consumer content of as much as 3% recycled glass which reduces landfill impact.
Consume E	Defines pre-consumer content of as much as 45% recycled material which reduces our carbon footprint.
	Florim USA sources >95% raw material within a 500 mile radius, which results in a smaller carbon footprint.
G GREEN SQUARED	Tile Council of North America and the American National Standards Institute's standard for sustainability and environmental impact.
Environment PRIORITY ONE	A declaration that Florim USA values the environment and works daily to minimize our adverse impact upon it.
hpd version 2.0	The Health Product Declaration Collaborative transparency declaration for all of Florim USA's naturally occurring materials.
Red List Free Declare.	Declare labels disclose all intentionally added ingredients and residuals present in the final product. Being Red List Free means the worst materials, chemicals, and elements for human and environmental health are not present within our products.
Certified Environmental Product Declaration www.nst.org	Certification of plant and product specific Environmental Product Declaration (EPD) which tracks environmental impacts from the production of porcelain tile.
GREENCUARD WINDOWN THE	Underwriter's Laboratories certification of low emitting materials. Florim USA is Green Guard Gold certified.
Product Certification BUREAU VERITAS Certification	Bureau Veritas Standards Program verifies and certifies both pre- and post-consumer recycled content.
TILE COUNCIL OF NORTH AMERICA, INC.	Florim USA actively participates in the Tile Council of North America which allows us to be on the forefront of advances in the tile industry and its standards.
TEMBER OF THE PROPERTY OF THE	USGBC is committed to suit a more sustainable life. Florim USA supports this mission by manufacturing products which aid architects in achieving USGBC certification.
INTERNATIONAL LIVING FUTURE INSTITUTE	Florim USA's sustainability and social practices support the mission of The International Living Future Institute which strives to create a socially just, culturally rich, and ecologically restorative community.
To annual to the second	The Tennessee Recycling Coalition is dedicated to promoting recycling and sustainable material management practices, and awarded Florim USA the Tennessee Recycler of the Year award for 2020.

.38.

Progress that invests in the entire society

As an active member of the U.S Green Building Council, MILE*stone spreads awareness to the community and encourages the use of building solutions through environmentally friendly practices.

Our products positively contribute to the requirements for obtaining the LEED (Leadership in Energy and Environmental Design) and WELL (IWBI) certifications.

A commitment to environmental sustainability and responsibility

We are committed to conscious development that minimizes the negative impact of manufacturing production on the environment. Our general approach to sustainability intersects with our business strategy to embrace three areas of responsibility: economic, social, and environmental. Some ways we prove this are:

- Products containing as much as 45% recycled content.
- Post-consumer recycled content levels as much as 3%.
- Zero industrial wastewater discharge.
- A 99% internal process recycling rate.
- Local sourcing of >95% raw materials (within 500-mile radius of factory) resulting in low transportation related carbon emissions.

MILE*stone is taking these and other steps, as well as actively investing to reduce carbon emissions to ensure that we reach full carbon neutrality by 2030.



Cleaning & Maintenance / Routine Care Instructions



Scan the QR code with your smartphone.







300 International Blvd. Clarksville, TN 37040 | www.milestonetiles.com | 1-877-356-7461

