
Inspired by the artistic blend of watercolors, Silhouette™ strides in with soft tones and linear flow creating an inviting environment.

SILHOUETTE™ Glazed Porcelain





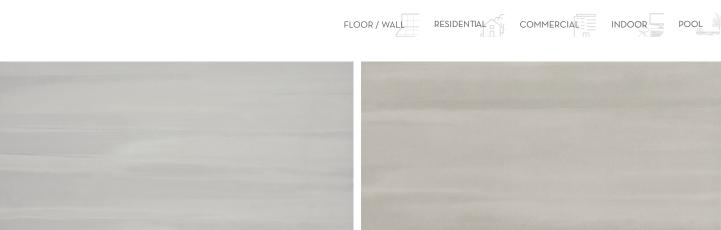

Contour

Figure





Profile

Contour

Mosaics

Figure

Profile

Shadow

Sizes	12 ["] x24" 1.81 [°] x23.62 ["]	13"x13" Me	esh 3"x12" Floor SBN				
Thickness	9.8mm	9.8mm	9.7mm				
Faces	6	N/A	N/A				
Finish	Matte	Matte	Matte				
Edge	Pressed	Cut	Cut/Round	ed			
Grout Joint Recommendation	3/16"	3/16"	3/16"				
Testing	Abrasion Resistance C1027	0 0	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A137.1	Scratch Hardness MOHS	Shade Variation Rating
Results*	III	>350 lbf	Not Resistant	<0.50%	>0.55	6	V3

Product and Installation Details | ANSI A108.02 Section 4.3.8.2 - For running bond/brick joing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



Sustainability Attributes

- Real List Free
 Health Droduct Declaration (LIDD) provide durate
 - י עשאט) provided upon request Recy Sirecyclable

 ${}^* \mbox{For more information visit www.emser.com. Always consult a professional for proper usage and installation.}$