
Single Gang

Ordering Information



Blank cover for enclosing splices and taps where device not used.

Description	Material	Cat. #
Surface	Sheet aluminum	**DS100**
Flush	Sheet steel	**DSS100**




Blank cover with gasket for enclosing splices and taps where device not used.

Description	Material	Cat. #
Surface or Flush	Cast aluminum	**DS100G**



DS21



DS21G

For standard and 3-pole, 2-wire grounding type round flush receptacles. Opening diameter 1 7/16".

Description	Material	Cat. #
Surface	Sheet steel	**DS21**
Surface	Sheet aluminum	**DS21 SA**
Surface or flush	*Feraloy*® iron alloy with gasket	**DS21G**




For GFI receptacles.

Description	Material	Cat. #
Surface	Sheet steel	**DS23 GFI**




For flush plug receptacle requiring 1 5/8" opening diameter.

Description	Material	Cat. #
Surface	Sheet steel	**DS35**



For duplex convenience receptacles.

Description	Material	Cat. #
Surface	Sheet steel	**DS23**
Surface	Sheet aluminum	**DS23 SA**
Flush	Sheet steel	**DSS23**




For standard and 3-pole, 2-wire grounding type duplex convenience receptacles. Gasket included.

Description	Material	Cat. #
Surface or flush	*Feraloy*® iron alloy	**DS23G**




For square handle general use snap or toggle switches – unguarded.

Description	Material	Cat. #
Surface	Sheet steel	**DS32**
Surface	Sheet aluminum	**DS32 SA**



For square handle general use snap or toggle switches – guarded.

Description	Material	Cat. #
Surface or flush	*Feraloy*® iron alloy with gasket	**DS32G**
Surface	Sheet steel	**DS52**



Adapter plate for mounting WLRS/ WLRD covers to flush device boxes.

Description	Cat. #
Flush Device Adapter	**WLRA1**

Also can be used to mount all covers with four corner screws listed see pages 37, 39, 40, 41, 42 and 43 to flush device boxes.


See page 42 for receptacle specifications and listings of complete receptacle/cover combinations.
†Must be used with a wet locations rated wiring device.

 Copyright© 2013 Eaton's Crouse-Hinds Business

2F Covers for Cast Iron or Aluminum Device Boxes

Single Gang - Raintight Covers (Gasket Included)

Ordering Information



For general use snap switches. Includes gasket.

Description	Material	Cat. #
For standard ON-OFF operation	Copper-free aluminum	**DS181**



For general use snap switches. Includes gasket.

Description	Material	Cat. #
For standard ON-OFF operation. With hole for lock	Die cast aluminum	**DS185**




For general use snap switches. Includes gasket.

Description	Material	Cat. #
For standard operation. Marked ON-OFF handle	Cast aluminum	**DS128**

 Copyright© 2013 Eaton's Crouse-Hinds Business

Single Gang - Switches and Motor Control Push Button

Ordering Information



For manual motor starting switches. Fits FS and FD boxes. Takes Westinghouse switches MST01 (1-pole) and MST02 (2-pole). Includes gasket.

Description	Material	Cat. #
For standard ON-OFF operation	*Feraloy* iron alloy	**DS199**




Furnished with buttons for operating motor control push button switches. Includes gasket.

Description	Push Buttons No.	Color	Material	Cat. #
Button (normally open) marked START	1	Green	*Feraloy* iron alloy	**DS171F** ①
Button (normally closed) marked STOP	1	Red	*Feraloy* iron alloy	**DS171G** ①
Button (normally open) marked START and button (normally closed) marked STOP	1	Green	*Feraloy* iron alloy	**DS171** ①
	1	Red		

Description	No.	Color	Material	Cat. #
Two push button	2	Black	*Feraloy* iron alloy	**DS171J** ①

① If desired, markings on indicating plates may be added to catalog number. Select from the list of standard markings below:

HAND	CLOSE	OFF	AUTO.	UP	RUN
EMER.	DOWN	JOG	FORWARD	START	RESET
REVERSE	STOP	TRIP	OPEN	ON	TEST
LGT. ON					

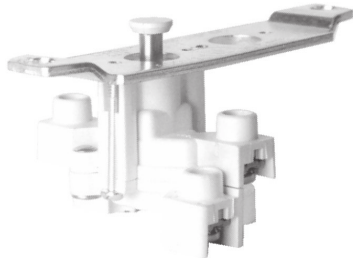

Heavy duty motor control push button switch

No. of Buttons	Normal Positions		Cat. #
1	1 circuit universal		**ED11**
2	2 circuits universal		**ED12†**

†Two universal contact blocks, must be wired as two circuits, with one normally open and one normally closed.

DS Covers use the switches shown in the list below.

Cover	Takes Switch	Cover	Takes Switch
DS171	ED12	DS171F	ED11
DS171G	ED11	DS266	ED12
DS265	ED11		

 Copyright© 2013 Eaton's Crouse-Hinds Business

Single Gang - DS Receptacles and WP Plugs

Applications:

WP plugs and DS receptacles are used:

- Wherever dust, dirt, moisture and corrosion are a problem
- Outdoors or in locations where frequent washdowns occur, as in dairies and food processing plants

Features:

DS receptacle housings are used:

- With FS and FD cast device boxes, either surface mounted or installed flush in a wall
- With single gang, two gang tandem and multiple gang boxes having individual cover openings
- A threaded cap which effectively seals housing when not in use

WP plugs include:

- A molded Neoprene hood with integral sleeve to seal the cord entrance
- An aluminum ring which clamps the hood to receptacle housing face, to complete watertight seal when plug is in use

Certifications and Compliances:

- UL Standards: 498; 514A
- NEMA/EEMAC: WD-1; WD-5
- CSA Standard: C22.2 No. 42*

*Compliance.

Standard Materials:


- Receptacle housings: body – *Feraloy*® iron alloy; cap – copper-free aluminum
- Plug exteriors: hood – Neoprene; fastening ring – copper-free aluminum

Standard Finishes:


- *Feraloy* iron alloy – electrogalvanized and aluminum acrylic paint
- Copper-free aluminum – natural
- Neoprene – natural (black or yellow)

Electrical Rating Ranges:

- 15 amperes, 125 volts
- 20 amperes, 125, 250 volts



DS Receptacle housings



WP Plugs



CC Replacement receptacle

Grounding Type Receptacles

For Plugs with U shaped or Round Grounding Contacts

Rating	Cover With Recept. Cat. #	Diagram	Style	Plug Cat. #	Diagram	Cord Dia.	Repl. Recept. Cat. #
15 amps 125 volts	**DS96***	NEMA: 5-15R	2-wire, 3-pole†	**WP820**	NEMA: 5-15P	.500 to .625	**CC55**
20 amps 125 volts	**DS222**	NEMA: 5-20R	2-wire, 3-pole†	**WP832**	NEMA: 5-20P	.500 to .625	**CC71**
20 amps 250 volts	**DS290**	NEMA: 6-20R	2-wire, 3-pole†	**WP930**	NEMA: 6-20P	.500 to .625	**CC90**

†Third pole grounded.
*Compliance

For listing of typical FS cast devices boxes, see pages 23 and 24.

 Copyright© 2013 Eaton's Crouse-Hinds Business

Single Gang - Pilot Light Covers, Extensions and Adapters

Ordering Information




For pilot light units (furnished with jewels)

Description	Material	Jewel Color	Cat. #
Surface	Sheet steel	Red	**DS24**



For pilot light units (furnished with jewel and gasket).

Description	Material	Jewel Color	Cat. #
Surface or flush	*Feraloy* iron alloy	Red	**DS24G**

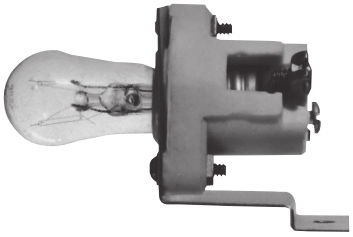

Pilot light unit (without transformer)

Circuit Voltage	Lamp Base	Watts	Cat. #
110	Candelabra	6	**C3310**



Pilot light (with transformer)†, FD only

Circuit Voltage	Lamp Base	Watts	Cat. #
440	Candelabra	6	**C333**

†Transformer 50–60 cycle, 440 / 110 volts.




EXF Extensions (takes covers and flush rectangular wiring devices, or plug receptacles with housings)

Ext. Depth	Cat. #
1"	**EXF11**
2½"	**EXF21**



FS flush mounting adapter (can be used with multi-gang bodies having individual cover openings. Furnished with gasket and screws)

Mtg. Style	Cat. #
Wall	**FS031**



Gaskets for use between device boxes and covers.

Material	Cat. #
Neoprene	**GASK91‡**

‡Not recommended as watertight.

 Copyright© 2013 Eaton's Crouse-Hinds Business