


PIN OUT	
P1<P3>	P2<P4>
PIN1	PIN1
PIN2	PIN2
PIN3	PIN3
PIN4	PIN4
PIN5	PIN5
PIN6	PIN6
PIN7	PIN7

ELECTRICAL TESTING:
 (1)100% open short &miss wire test.
 (2)Insulation Resistance:≥5MΩ.
 (3)Contact Resistance:≤5Ω.
 (4)Dielectric Strength:DC 200V/0.1s.

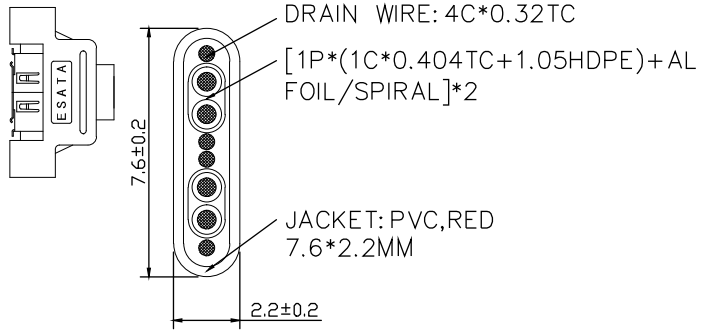

ITEM	P/N	DESCRIPTION	UNIT	QTY
8		BRACKET	RIGHT ANGLE,NICKEL PLATED	PCS 1
7		NUT	4-40 UNC M3*5.5,NICKEL PLATED	PCS 2
6		SCREW	4-40 UNC 5*11.6,NICKEL PLATED	PCS 2
5		OVER MOLD	45P PVC,BLACK	g
4		INTERNAL MOLD	TRANSPARENT PE	g
3		MALE PLUG	SATA 7P,PIN HEAD/GOLD PLATED	PCS 1
2		MALE PLUG	ESATA 7P WITH SHIELD/NICKEL PLATED,PIN	PCS 2
1		CABLE	HEAD/GOLD PLATED Serial ATA: [1P*(1C*0.404TC+1.05HDPE)+Al foil/SPIRAL]*2+D.W / 4C*0.32TC ,7.6*2.2MM ,JACKET/ RED PVC	PCS 2

THIRD ANGLE PROJECTION

GENERAL NOTES
 DIMENSIONS ARE IN MM - DO NOT SCALE
 THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION THAT IS PROPERTY OF STARTECH.COM

StarTech.com

PRODUCT ID	ESATAPLATE2
DESCRIPTION	2 Port SATA to eSATA Slot Plate Bracket
DO NOT SCALE	SHEET: 1 OF: 1
	UPLOAD DATE: 3/04/2022