


T-24V-24W-PI

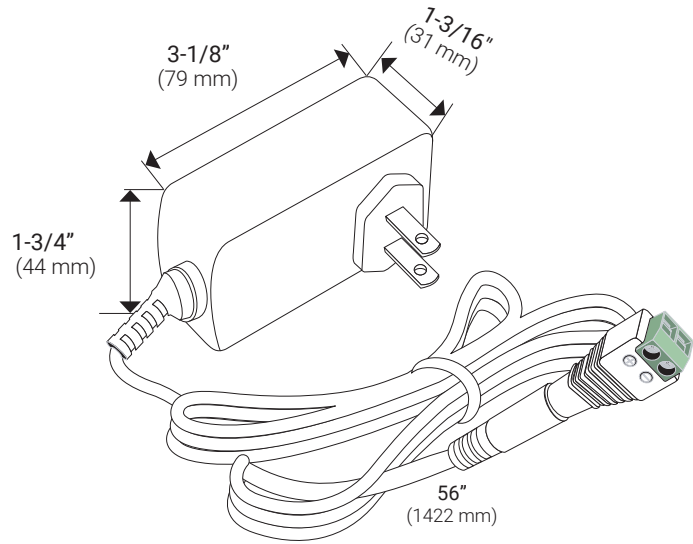

## 24 WATT PLUG-IN POWER SUPPLY

| PART NUMBER  | DESCRIPTION  | DIMENSIONS   | AC POWER<br>CORD LENGTH   | VOLTS | AMPS |
|--------------|--|--|---------------------------|-------|------|
| T-24V-24W-PI | 24 watt AC/DC 2 prong<br>plug-in, 24-volt DC 1 AMP | 3-1/8" x 1-3/4" x 1-3/16"<br>79 mm x 44 mm x 31 mm | 56" (4 ft. 8")<br>1422 mm | 12    | 1    |

## FEATURES

- No hardwiring required – use an existing hidden outlet
- Easily extend wire between fixture and power supply with Female Barrel Connector (T-FBC)
- Dims on the 24-volt or secondary side with switches, sensors, or the Wireless Dimming System
- 24-volt power supplies over 96 watts are UL Listed for commercial use, and are not UL Class 2 Listed for residential
- 3-year limited warranty
- Designed for indoor application

## TECHNICAL INFORMATION

|                              |                             |
|------------------------------|-----------------------------|
| <b>Series</b>                | Plug-in Power Supply Series |
| <b>Input Voltage</b>         | 120 volt AC                 |
| <b>Output Voltage</b>        | 24-volt DC                  |
| <b>Output Wattage</b>        | 24 watts                    |
| <b>Dimmable</b>              | Non-dimmable                |
| <b>Rating</b>                | UL Listed in USA/Canada     |
| <b>Rated Life</b>            | 30,000 hrs                  |
| <b>Mounting</b>              | Free placement              |
| <b>Operating Temperature</b> | 32°F to 104°F (0°C to 40°C) |
| <b>Environment</b>           | Dry location                |
| <b>Construction Material</b> | Plastic housing             |
| <b>Warranty</b>              | 3 years                     |

## INSTALLATION LOCATIONS

- Above Cabinet / Open Soffits
- Interior Wall Cabinet
- Base Cabinets
- Open Coves
- Any Available & Accessible Outlets

**DO NOT INSTALL IN AN ATTIC**