
## **ASSEMBLY INSTRUCTION**

## LOVESEAT& SOFA

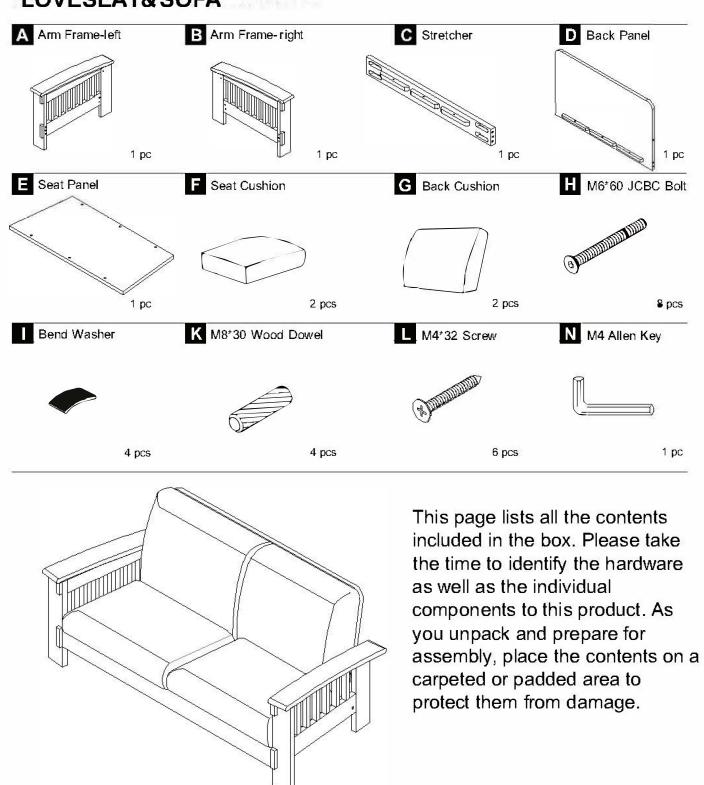

## 9912-2&3 LOVESEAT& SOFA


Fix stretcher (C) with arm

 $\begin{array}{ll} \text{frame (A+B)} & \text{.Insert wood} \\ \text{dowels (J)} & \text{into the middle} \\ \text{hole of stretcher (C)} & , \end{array}$ 

use bend washer (1) and bolt (H) on up

and down holes ,turn the allen key (L)


to lock them.

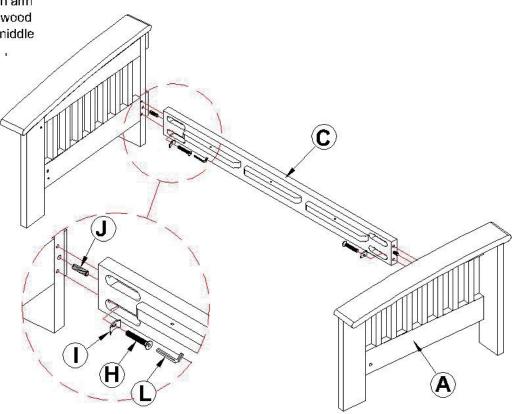

Fix back panel ( D) with arm frame (A+B). Insert wood dowels into the middle holes on both side of back panel ( D), put bolt ( H) through the side holes of arm frame (A+B), use allen key ( L) to lock them with back panel ( D).

## 9912-2&3 LOVESEAT& SOFA

Put on seat panel (E) as shown, use screw (K) to fix .

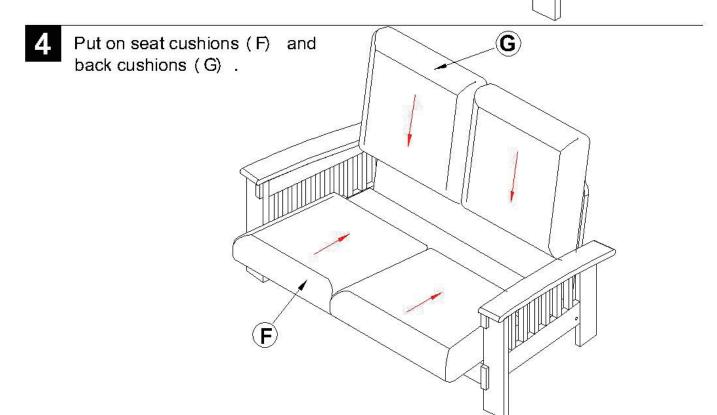

c I e a n i n g & c a r e Treat surface with care. Surface is resistant to scratches but is not scratch resistant. Clean surfaces with a dry or damp soft cloth. Do not use abrasive cleaners. Hardware may loosen over time. Periodically check that all connections are tight.