

HYDAPIPE®

Surface Mounted Shower System

□ 1-801S-458-FSB

Pressure Balancing mixing valve integral service stops and adjustable stop screw to limit handle turn. Super shower head on institutional type head bracket fitting. Lever diverter with volume control. Wall/hand shower with flexible 5' metal hose, in-line vacuum breaker, wall connection and flange. 30" slide bar for hand shower mounting. Attached soap dish and top cap. Stainless steel covering to be 18 gauge with #4 brush finish.


Modifications:

Add:

- **Suffix 285:** Fre-Flo, all brass, fixed spray (no ball joint)
- **Suffix 21:** Single supply, manual shut off, 4 arm handle
- **Suffix 60:** Single supply, metering shut off
- **Suffix 56:** Pressure Balance and metering combination
- **Suffix 2.0:** 2.0 gpm (7.6 L/min) flow restrictor

Delete:

- **Suffix S:** If soap dish is not required

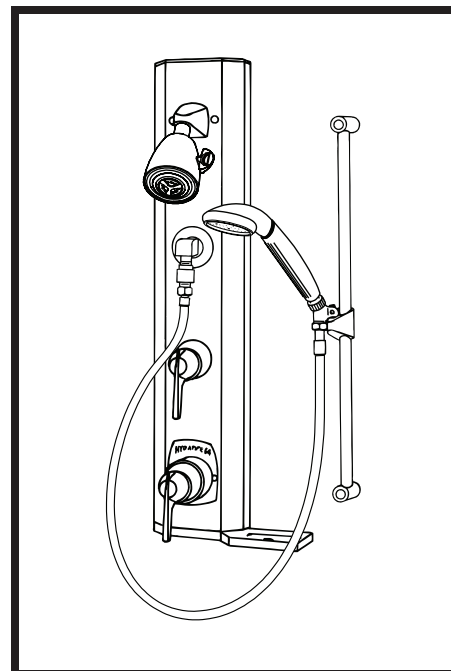

**SYMMONS PRODUCTS MEET
ALL KNOWN FLOW RATE
REQUIREMENTS.
Shower Heads and Hand Showers
2.5 GPM (9.5 L/min)**

Job/Location

.....
.....

Engineer

.....
.....

Contractor

.....
.....

For ADA compliance (Americans with Disabilities Act) consult ADAAG or your state regulations for proper product choice and mounting locations.

Symmons Industries, Inc. ■ 31 Brooks Drive ■ Braintree, MA 02184
Phone: (800) 796-6667 ■ Fax: (800) 961-9621
Website: www.symmons.com ■ Email: gethelp@symmons.com

Copyright © 2015 Symmons Industries, Inc. Printed in U.S.A. ■ 070215


SYMMONS®
the smart choice™