TECHNICAL DATA

Capacity under lid	19lt / 5gal		
Lid	LFV1920 - Tear Strip with Flexspout and Vent		
Wall Thickness	Lid LFV1920	2.03mm	0.080in
Weight (approx.) without bail	Lid LFV1920	248g	8.74oz
Material	HDPE		
Handle	Plastic or Metal		
Thermal range	-18°C (0°F) to 66°C (150°F)		
Pail Colour	Standard in White, other colors available.		

TOP LOADING RESISTANCE

60kg (132lbs) at 23°C (73°F), 30 days, product temperature when filling pails and warehouse temperature will affect pail performance. Hofmann recommends testing prior to full production.

OPENING & CLOSING

TO OPEN: Remove tear strip, then lift cover.
TO CLOSE: Place lid on pail, press on with hands or use a rubber mallet.

RECOMMENDATIONS

Do not exceed pallet edges with pails. Grade A pallets should be used with boards that have tight spacing to ensure proper pail support. To improve stability, release air from pail when applying the lid. Stretch wrapping machine tension should be adjusted to ensure no deformation of the pail. Use slip-sheet to improve pails stability. Hofmann recommends testing prior to full production.

APPROVALS

Virgin materials are approved for food contact and meet FDA (Food and Drug Administration USA) and HPB (Health Protection Branch Canada regulations.

Handling conditions vary a lot from customer to customer. Tests are recommended throughout the process of denesting, filling, conveying palletization, warehousing, transportation and utilization by intermediaries and users. Specifications can change without notice. Please contact your Hofmann representative to confirm this data.

PRODUCT CODE

LID: LFV1920,

LFV1920

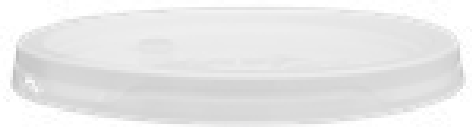

PACKAGING OF EMPTY PAILS & LIDS

- Warehousing of LRT1922/LRF1920/ LFV1920 Lids:
  300 per tray - 600 per pallet
- Max 4 pallets high for warehousing of lids

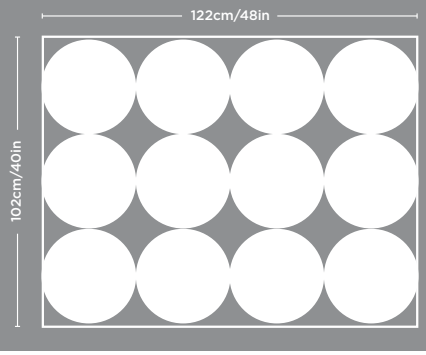

DISCLAIMER
THIS INFORMATION IS PROVIDED AS A GENERAL GUIDE, INCLUDING DIMENSIONS. IT IS THE CUSTOMER'S RESPONSIBILITIES TO SELECT THE PROPER CONTAINER FOR PRODUCT AND APPLICATION COMPATIBILITY.

DISTRIBUTED BY: Pipeline Packaging

REF NO.: DWG30423-2

DESCRIPTION:
3.5 - 6 Gallon HDPE Cover with plastic spout and vent, Tear Tab with EPDM Gasket