

VTS5VSH Tecasafe® One 5.7 oz Vented FR Shirt

CAT 2 Protection





Meets Arc Flash safety requirements in hazardous environments

Inherent FR Protection

Tecasafe® One fabric provides consistent defense against arc flash, thermal hazards, and flash fire

Lightweight & Cool

5.7 oz, moisture-wicking fabric with vented back minimizes heat retention

Durable Performance

Woven fabric resists wear, holds shape, and withstands repeated washing for lasting comfort and reliability

Full-Coverage Protection

Long sleeves and secure button-front shield against sparks and environmental hazards



TECASAFE®ONE

THE NEW ALTERNATIVE TO 88/12

Tecasafe® One brings ultrabreathable, inherently flameresistant(IFR) performance to the greater world of industrial professionals. Built for comfort, our patent-pending design is engineered with soft, next-to-skin fibers on the interior of the fabric and tough, protective fibers on the outside of the fabric.



At 5.7-ounces, this durable, inherently flame-resistant fabric offers premium benefits at a competitive price point.







Technical Data

FABRIC & MATERIAL		
PRODUCT MATERIAL	Tecasafe® One	
MATERIAL COMPOSITION	51% Lyocell, 39% Modacrylic, 10% Aramid	
FABRIC WEIGHT	5.7 oz	
FABRIC TYPE	Woven	
DESIGN & CONSTRUCTION		
CLOSURE TYPE	Buttons	
COLLAR TYPE	Fold Down	
CUFF TYPE	Button Cuff	
SLEEVE TYPE	Long Sleeve	
GENDER	Unisex	
WASHABILITY	Machine Washable	
POCKETS & STORAGE		
TOTAL POCKETS	3	
POCKET DESCRIPTION	Right chest pocket with badge tabs, Left chest pocket with pencil slot, Left sleeve two slot pencil pocket	

Compliance Data

ASTM STANDARD	ASTM F1506
ATPV RATING	8.2 Cal/cm2
NFPA STANDARD	NFPA 2112
NFPA STANDARD	NFPA 70E
NFPA 70E - HAZARD RISK CATEGORY	CAT 2

Application Data

Construction	Manufacturing
Mining	Transportation
Oil and Gas	Utilites

Part Info (* - Made To Order)


SIZE	LIGHT BLUE	LIGHT GRAY	GRAY	RED	DENIM
S*	VTS5VSHLB-S	VTS5VSHLG-S	VTS5VSHGY-S	VTS5VSHRD-S	VTS5VSHDN-S
М	VTS5VSHLB-M	VTS5VSHLG-M	VTS5VSHGY-M	VTS5VSHRD-M	VTS5VSHDN-M
L	VTS5VSHLB-L	VTS5VSHLG-L	VTS5VSHGY-L	VTS5VSHRD-L	VTS5VSHDN-L
XL	VTS5VSHLB-XL	VTS5VSHLG-XL	VTS5VSHGY-XL	VTS5VSHRD-XL	VTS5VSHDN-XL
2X	VTS5VSHLB-2X	VTS5VSHLG-2X	VTS5VSHGY-2X	VTS5VSHRD-2X	VTS5VSHDN-2X
3X	VTS5VSHLB-3X	VTS5VSHLG-3X	VTS5VSHGY-3X	VTS5VSHRD-3X	VTS5VSHDN-3X
4X	VTS5VSHLB-4X	VTS5VSHLG-4X	VTS5VSHGY-4X	VTS5VSHRD-4X	VTS5VSHDN-4X
5X*	VTS5VSHLB-5X	VTS5VSHLG-5X	VTS5VSHGY-5X	VTS5VSHRD-5X	VTS5VSHDN-5X
6X*	VTS5VSHLB-6X	VTS5VSHLG-6X	VTS5VSHGY-6X	VTS5VSHRD-6X	VTS5VSHDN-6X



work hard. stay safe.®

TECASAFE®ONE



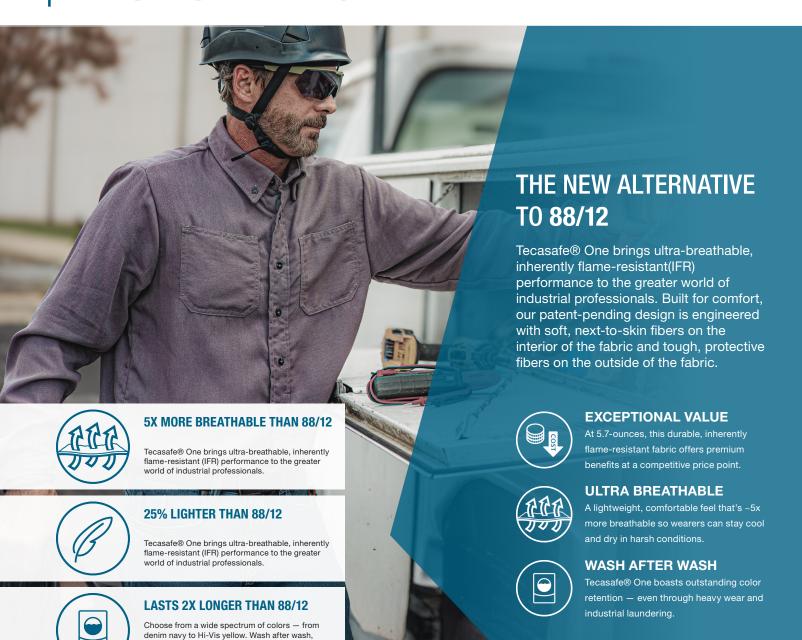

TECHNICAL DATA	
Nominal Weight	5.7 osy (193 gsm)
Construction	Woven
Color Options	Denim Navy, Gray, Hi-Vis Yellow, Khaki, Light Blue, Light Gray, Orange, Red, Royal, Spruce, Yellow
Fiber Content	Modacrylic, Lyocell, Aramid
Certifications	ASTM 1506, NFPA 2112, NFPA 70E, ANSI 107, CAN/CGSB 155.20, NFPA 1977

- even through heavy wear and industrial laundering.

Tecasafe® One boasts outstanding color retention

CERTIFICATIONS		
Protection from Flash Fire	NFPA 2112	
Protective Clothing For Wildland Fire Fighting	NFPA 1977	
Canadian Standard For Flame Resistance	CAN/CGSB 155.20	
High-Visibility Safety Apparel	ANSI/ISEA 107	
High-Visibility Safety Apparel	CSA Z96	
Protection From Flame Resistance & Electrical Arc	PPE 2	



work hard. stay safe.®

www.radians.com | sales@radians.com | 877-723-4267 | 901-388-7776