

# SSPEXBV SERIES 304 STAINLESS STEEL BALL VALVE (PEX)



## SPECIFICATION:


- For use with ASTM F2769, ASTM F2023, (PE-RT) SDR9 pipe
- For use with ASTM F876 PEX pipe
- Max Pressure Rating: 600 PSI CWP
- CWP - Cold Working pressure, is an indication of the pressure rating for valves at a temperature range of up to +100°F (37°C)
- Max Temperature Rating: -40°F to 200°F (-40°C to 93°C)
- Two piece investment cast body
- Blow-out proof stem
- Solid Stainless Steel Ball
- Stainless steel handle with blue plastic sleeve

## CERTIFICATION:

- cUPC Listed
- NSF/ANSI 61 & 372 Certified



| MATERIAL LIST |                     |
|---------------|---------------------|
| Part Name     | Material            |
| Body          | 304 Stainless Steel |
| Cap           | 304 Stainless Steel |
| Ball          | 201 Stainless Steel |
| Stem          | Zinc Plated Steel   |
| Seat          | PTFE                |
| Stem O-ring   | NBR                 |
| Spring Washer | Zinc Plated Steel   |
| Nut           | Zinc Plated Steel   |
| Handle        | 304 Stainless Steel |

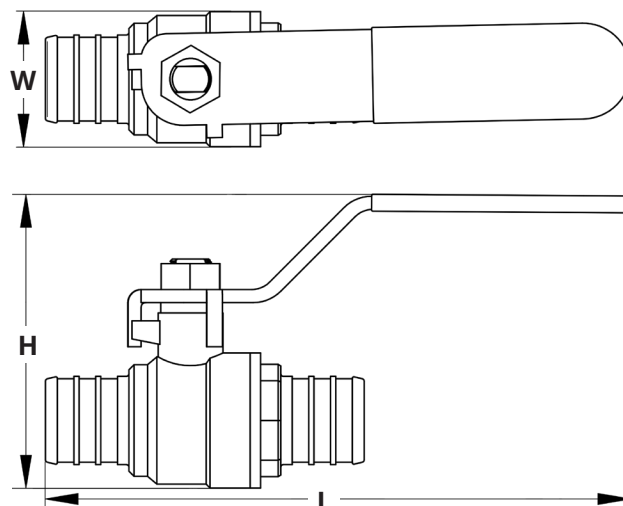

| DIMENSIONS |      |        |       |        |        |        |       |        |        |
|------------|------|--------|-------|--------|--------|--------|-------|--------|--------|
| Part No.   | Size | H      |       | L      |        | W      |       | Weight |        |
|            |      | inches | mm    | inches | mm     | inches | mm    | lbs    | grams  |
| SSPEXBV-05 | 1/2" | 0.85   | 21.59 | 4.55   | 115.57 | 1.60   | 40.64 | 0.16   | 72.57  |
| SSPEXBV-07 | 3/4" | 1.00   | 25.40 | 4.55   | 115.57 | 1.80   | 45.72 | 0.23   | 104.33 |
| SSPEXBV-10 | 1"   | 1.35   | 34.29 | 5.90   | 149.86 | 2.30   | 58.42 | 0.44   | 199.58 |

**BOSHART**  
INDUSTRIES

25 Whaley Avenue, PO Box 310, Milverton, ON CANADA N0K 1M0  
Tel: 800-561-3164

[boshart.com](http://boshart.com) ♦ [blog.boshart.com](http://blog.boshart.com)