
Liquid Tight Connectors

Catalog Number: PR5333
UPC: 784011208432



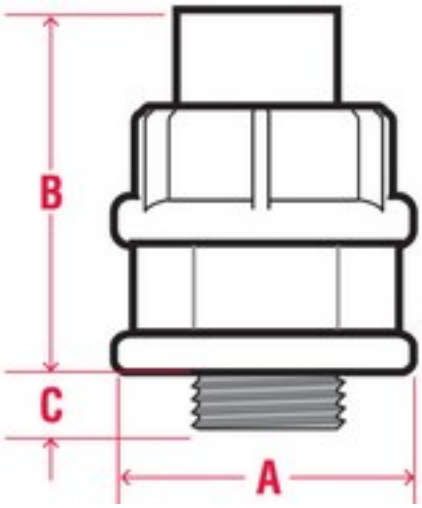

Description

3/4 Inch Straight LT Connector
PVC coated liquid tight connectors are used with liquid tight conduit to wire motors, transformers, processing equipment, pumps, etc. The flexible conduit and the PVC coated connector work together to seal out water and other corrosive liquids, protecting the conductors from damage.

Application

- Used with liquid tight conduit to wire motors, transformers, processing equipment, pumps, and more.

Features

- 40 mil gray PVC exterior coating
- 2 mil red urethane interior coating
- 13 trade sizes from 3/8" through 6"
- Sealing sleeves on all conduit openings
- Available in straight, 45° or 90° body configurations
- Available with an external grounding lug

General

Material:	FERROUS METAL
Exterior Finish:	A nominal .040 inch (40 mil) gray PVC coating
Interior Finish:	A nominal .002 inch (2 mil) red urethane
Configuration:	STRAIGHT

Dimensions

Dimension A (Inches)	1.74
Dimension B (Inches)	1.63
Dimension C (Inches)	0.56
Nominal Weight (Pounds)	0.3

Technical / Specification Documents

Specification Guide (1995 Master)	*AVAILABLE ON WEBSITE*
Specification Guide (2004 Master)	*AVAILABLE ON WEBSITE*
Installer Certification and Tools	*AVAILABLE ON WEBSITE*
Chemical Resistance Charts	*AVAILABLE ON WEBSITE*
Performance Specifications	*AVAILABLE ON WEBSITE*

Standards

UL 514B (Steel fittings only):	E200413
UL 467 (Steel Fittings only):	E217890
ETL PVC-001 Verified:	3072346-004

Plasti-Bond RedH2OT
PVC Coated Rigid Metal Conduit
1100 US Hwy 271 South, Gilmer, TX 75644
Tel 903.843.5591 | Fax 903.843.5595
customerservice@plastibond.com