

HYDAPIPE®

Surface Mounted Shower System

- 1-901S:** Through wall piping configuration with soap dish
- 1-901:** Through wall piping configuration less soap dish

Pressure Balancing mixing valve with screw driver service stops and adjustable stop screw to limit handle turn. Fre-Flo, all brass, vandal resistant head with ball joint on institutional type head bracket. Attached soap dish and sloped metal top cap. Stainless steel covering to be 18 gauge with #4 brush finish.

Modifications:

Valve:

- Suffix 21:** Single supply, manual shut off, 4 arm handle
- Suffix 22:** Single supply, manual shut off, lever handle
- Suffix 60:** Single supply, metering shut off
- Suffix 56:** Pressure Balance and metering combination

Shower head:


- Suffix 270:** Fre-Flo, all brass, ball joint, adjustable spray with volume control
- Suffix 231:** Super, ball joint, adjustable spray head
- Suffix 221:** Super, ball joint, adjustable spray head with volume control
- Suffix 285:** Fre-Flo, all brass, fixed spray (no ball joint)
- Suffix DSH:** Additional shower head in place of hand spray unit
- Suffix OWBj:** One way ball joint

Soap dish:

- Suffix RS:** Recessed soap dish
- Suffix C:** Cake soap dish affixed to unit
- Suffix CWM:** Wall mounted cake soap dish

Additional modifiers:

- Suffix 1.5:** 1.5 gpm (5.7 L/min) flow restrictor
- Suffix 2.0:** 2.0 gpm (7.6 L/min) flow restrictor
- Suffix FS:** Hand spray, hose and two wall hooks for hand shower mounting
- Suffix FSB:** Hand spray, hose and 30" slide bar for hand shower mounting
- Suffix HC1:** Slat seat and two wall grab bar (right or left hand)
- Suffix HC3:** Padded seat and two wall grab bar (right hand)
- Suffix HC4:** Padded seat and two wall grab bar (left hand)
- Suffix OD:** Quick-disconnect on hand spray units
- Suffix R:** White vinyl hose in lieu of metal hose
- Suffix T24:** 24" grab bar with ADA hand shower
- Suffix T36:** 36" grab bar with ADA hand shower
- Suffix T724:** 24" slide/grab bar with ADA hand shower
- Suffix T736:** 36" slide/grab bar with ADA hand shower
- Suffix WD:** Winter Drain includes relief valve on supply elbow for winter maintenance (for single supply systems only)

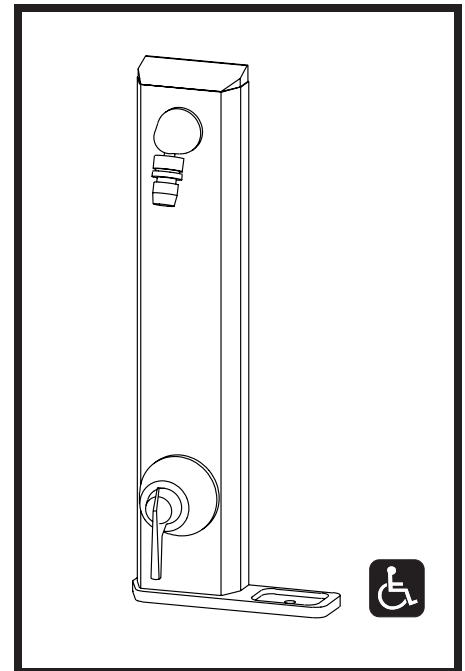

Compliance

- ASME A112.18.1/CSA B125.1
- ASME A112.18.1/CSA B125.3
- ASSE 1016



Job/Location

.....

Engineer

.....

Contractor

.....

For ADA compliance (Americans with Disabilities Act) consult ADAAG or your state regulations for proper product choice and mounting locations.