

Features

Solid brass construction
Euro-motion ceramic disc 35 mm valve cartridge
Cartridge stem adapter ensures secure handle-to-stem interface
Two-function, push-button control spray engine with solid brass housing
Magnetic docking system secures spray engine to spout
Pivoting-ball spray engine inlet fitting for enhanced directional control
8.57" (21.8 cm) spout height at outlet
7.42" (18.8 cm) spout reach (c-c)
ADA Compliant (Handles Only)
1.8 GPM (6.8 LPM) Max

PULL-DOWN PREP SINK / BAR FAUCET


3190-5223



Codes / Standards Compliance

Meets or exceeds the following at date of manufacture:

ASME A112.18.1/CSA B125.1
IAPMO/cUPC
NSF/ANSI/CAN 61, SECTION 9
NSF/ANSI 372
IPC
ADA & ICC/ANSI A117.1 (Handle Only)
Energy Policy Act of 1992
California Energy Commission
ASME A112.18.3 (Back Flow)
All applicable US Federal and State material regulations

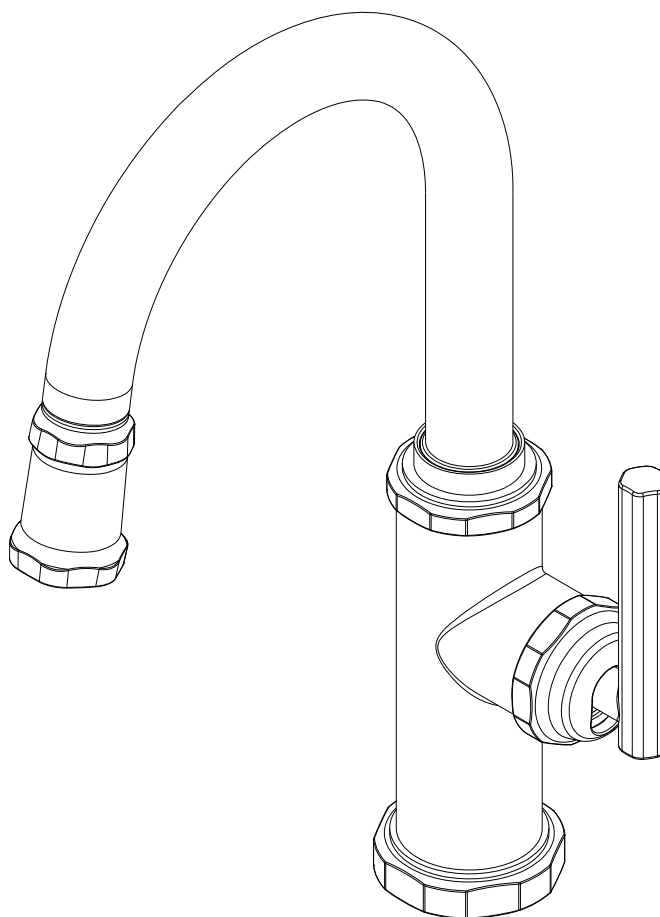

PRODUCT DIMENSIONS *(Units are in inches)*

4.80
[122]

6.78
[172, 1]

3.73
[94, 6]

4.12
[104, 5]

2.87
[73]
MAX DECK
THICKNESS

7.90
[200, 6]

8.57
[217, 7]

7.42
[188, 4]

14.85
[377, 1]

28.08
[713, 2]

75°

15°

Ø 1.34
[34]

2X 3/8" O.D. COMPRESSION
(9/16-24 UNF THREAD)

t: 949.417.5207 | www.newportbrass.com
©2025 NewportBrass