

# CARLISLE PANEL QUEEN BED


## ASSEMBLY INSTRUCTIONS



### PARTS PACKING CONFIGURATIONS

**BOX #1:**  
A. HEADBOARD


1 PC

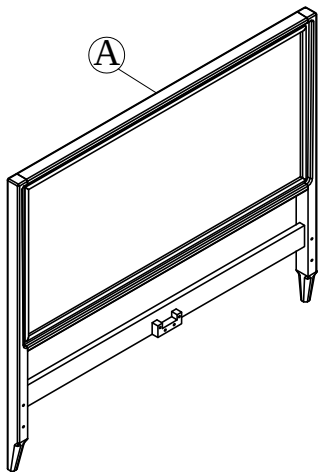

**BOX #2:**  
B. FOOTBOARD  
C. SLAT ROLL

1 PC

1 SET

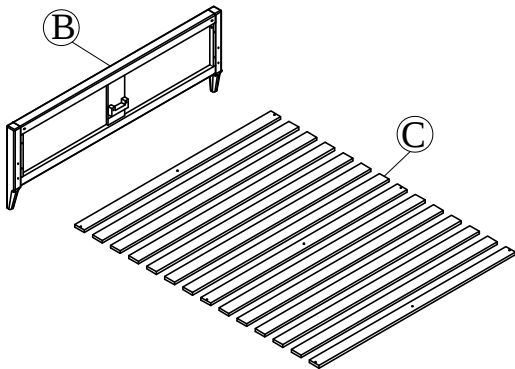


**BOX #3:**  
D. SIDE RAILS  
E. CENTER SLAT SUPPORT  
F. SLAT SUPPORT LEG


2 PCS

1 PC

5 PCS

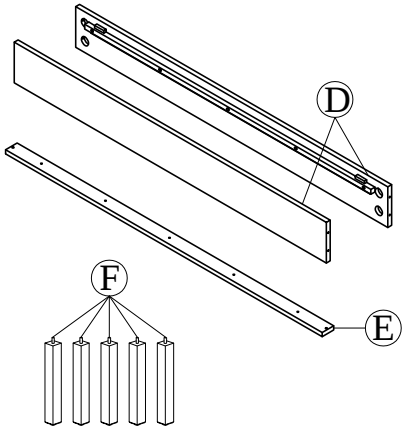

### FULLY ASSEMBLED

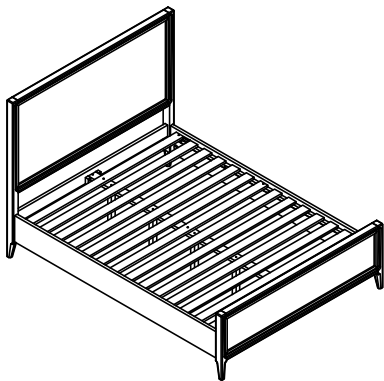


Not provided

### HARDWARE KIT PACKED IN BOX #2

| No. | Description                  | Image | Quantity |
|-----|------------------------------|-------|----------|
| 1   | THREADED BOLT (8x90mm)       |       | 8 PCS    |
| 2   | HALF MOON WASHER (7x14x27mm) |       | 8 PCS    |
| 3   | HEX NUT (M8)                 |       | 8 PCS    |
| 4   | WRENCH (13mm)                |       | 1 PC     |
| 5   | WOOD SCREW (4x30mm)          |       | 11 PCS   |
| 6   | ALLEN KEY (4mm)              |       | 1 PC     |

### STEP 1:

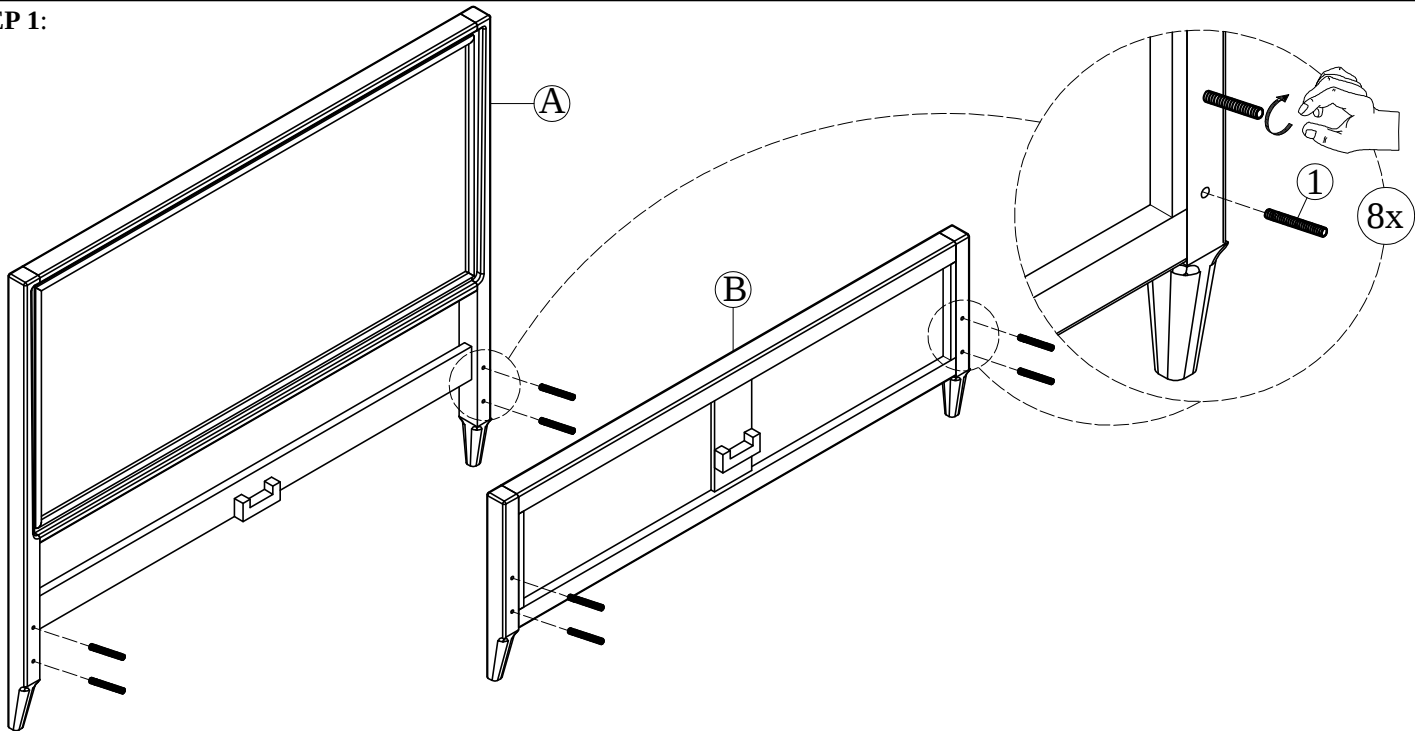


# CARLISLE PANEL QUEEN BED


## ASSEMBLY INSTRUCTIONS



### STEP 2:

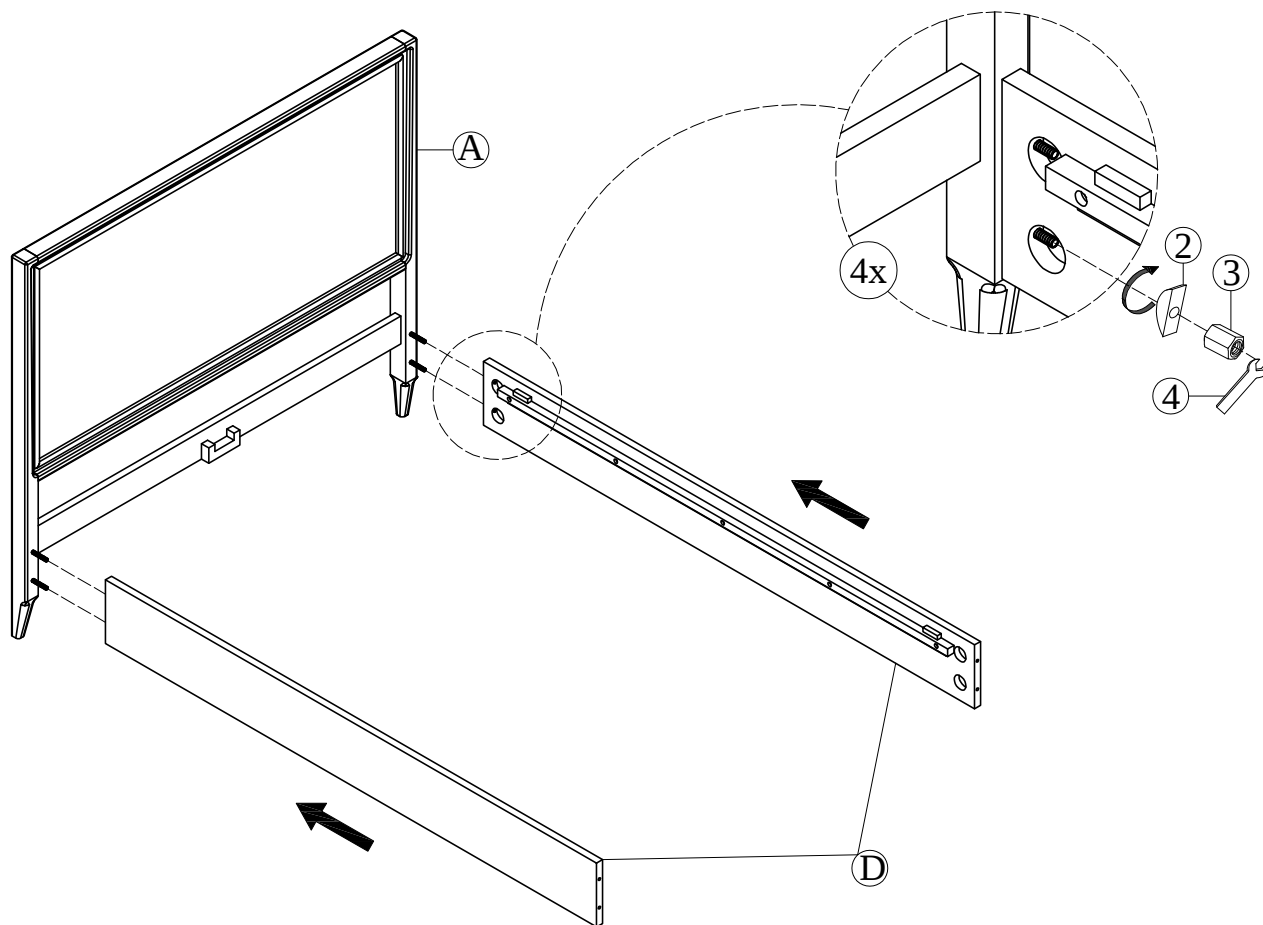

### STEP 3:

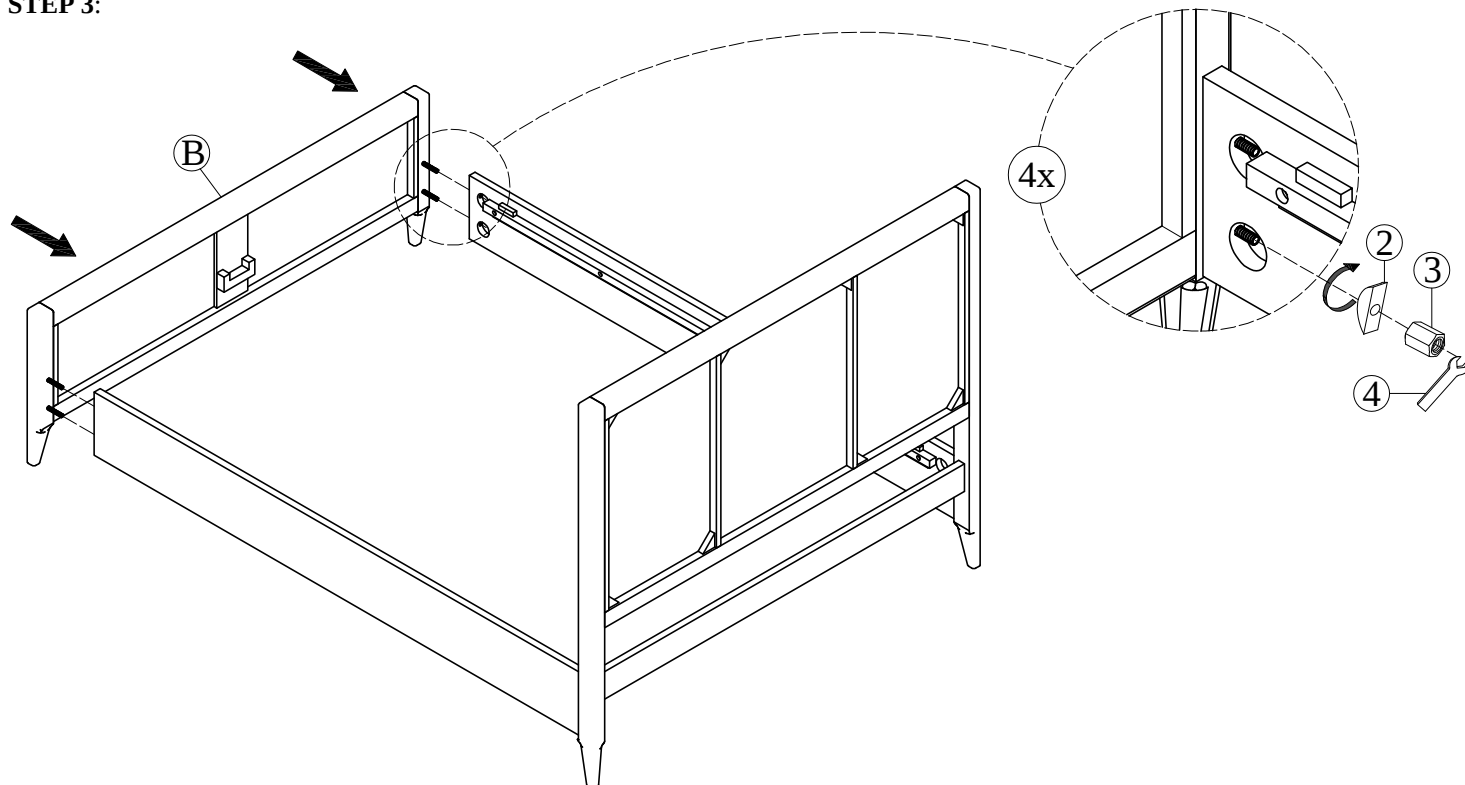

### STOP


- IF USING BED WITH AN ADJUSTABLE MATTRESS BASE, SKIP STEPS 4, 5, 6 & 7 AND REFERENCE APPENDIX A: ADJUSTABLE MATTRESS BASE ASSEMBLY SUPPLEMENT.
- IF USING BED FRAME WITH STANDARD BOX SPRING OR FOUNDATION, CONTINUE TO STEP 4

# CARLISLE PANEL QUEEN BED


## ASSEMBLY INSTRUCTIONS



### STEP 4:

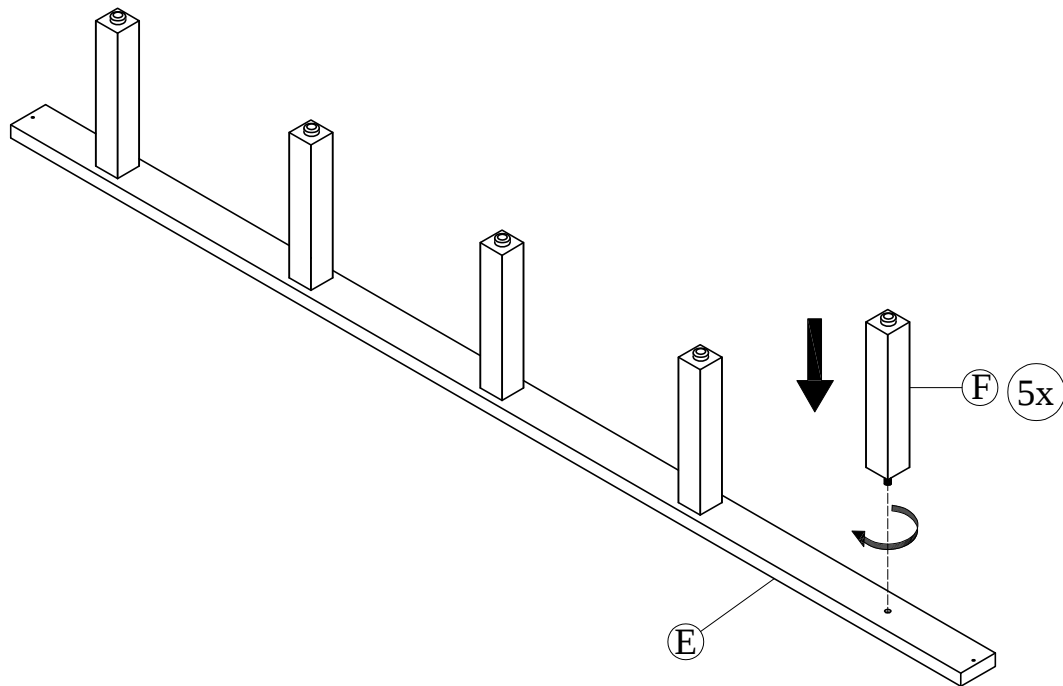

### STEP 5:

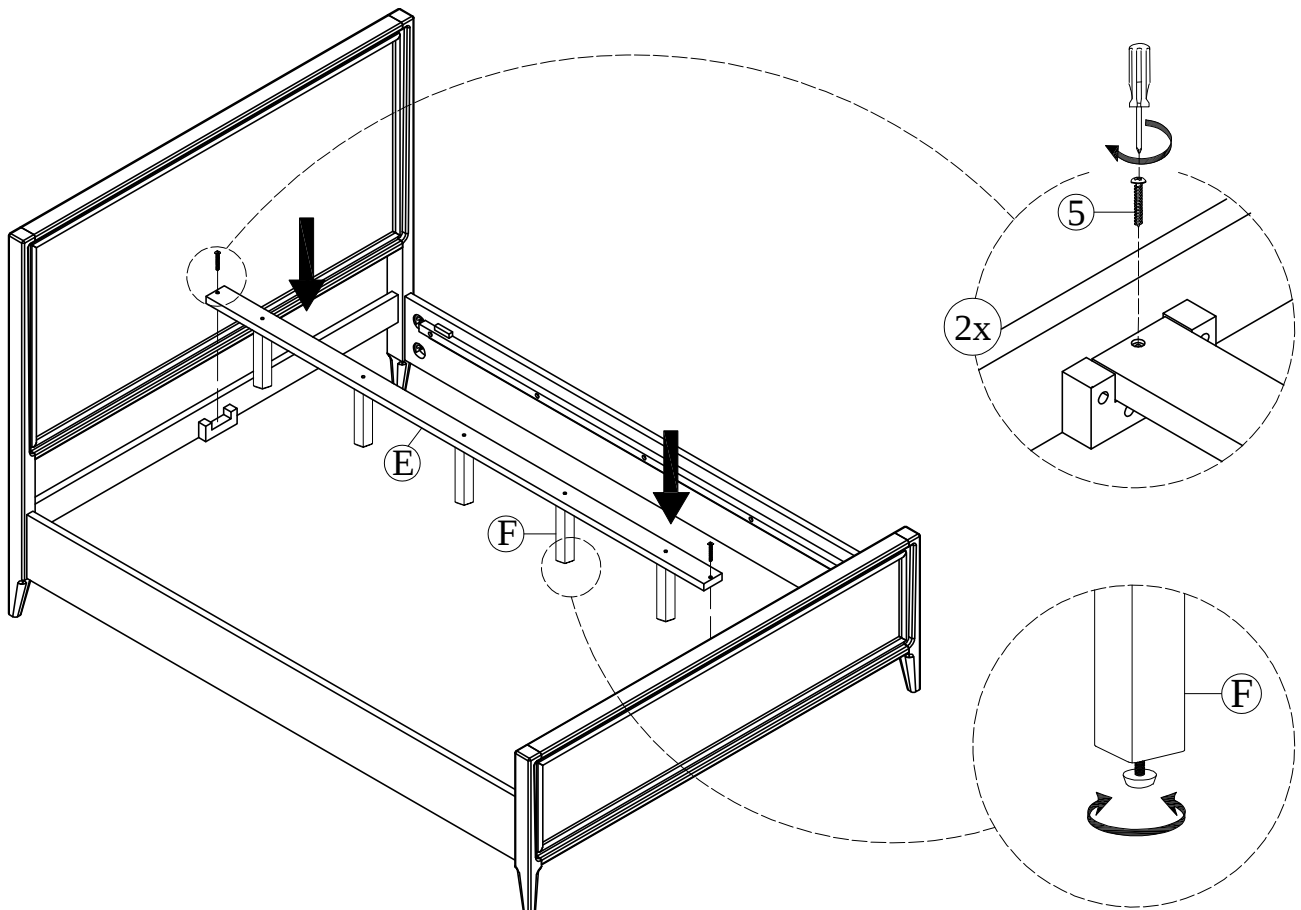


# CARLISLE PANEL QUEEN BED


## ASSEMBLY INSTRUCTIONS



### STEP 6:

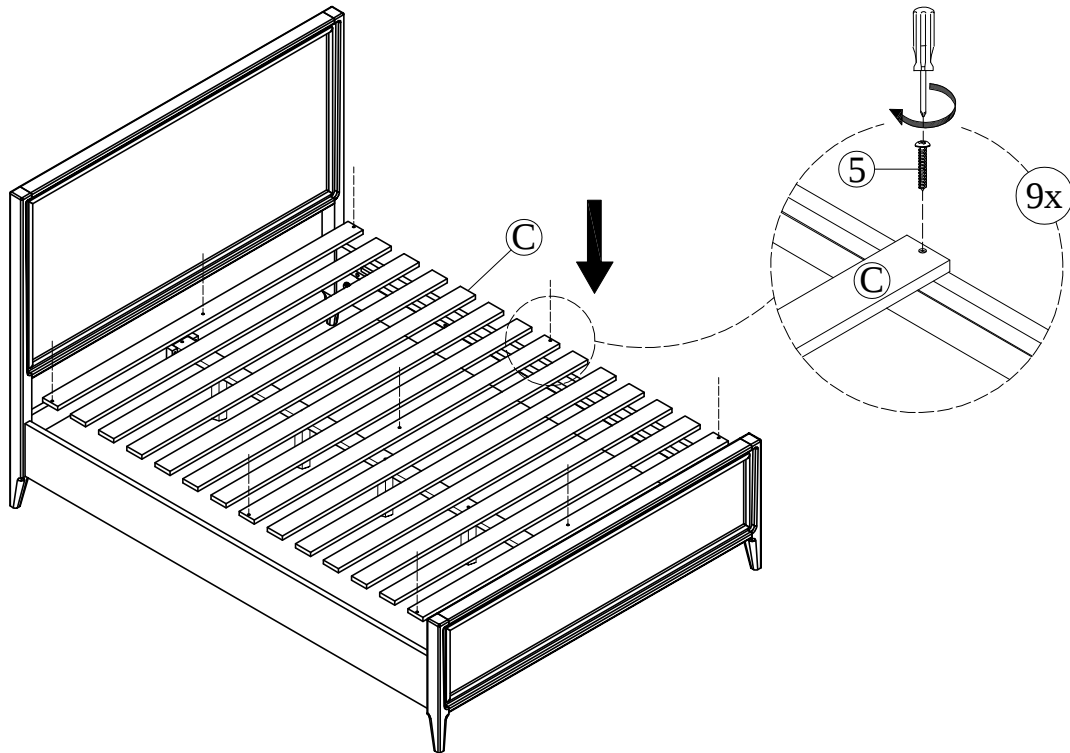

### STEP 7:

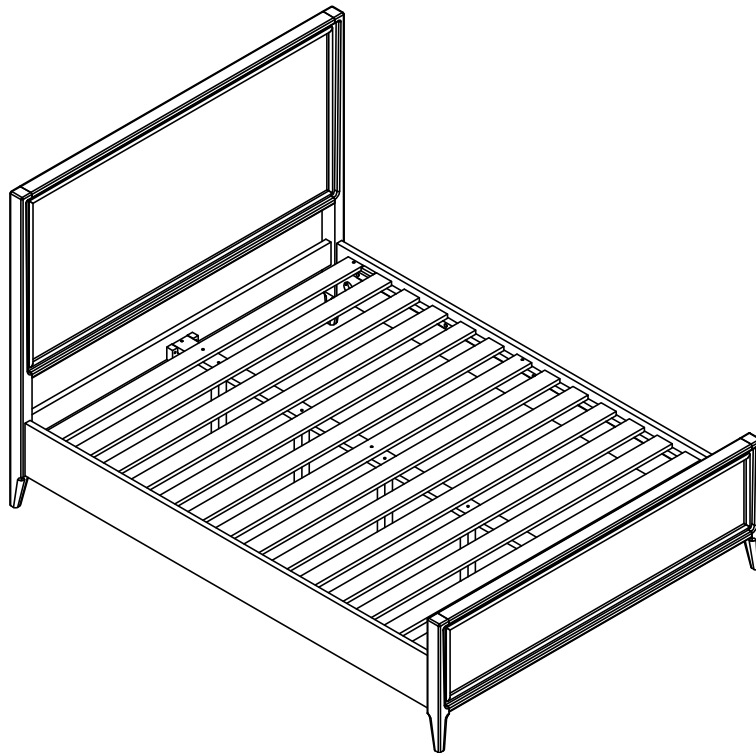


ASSEMBLY COMPLETE

#### INSTRUCTIONS FOR ADJUSTING LEVELERS:

Position the bed in your space and locate the leveler under each support leg.

Turn the leveler counter-clockwise to extend the leveler and clockwise to retract it.

Adjust each leveler until each support leg is applying equal, upward pressure on the support slat.



#### MAINTENANCE INSTRUCTIONS:

- Periodically check all fittings and tighten if necessary, as they can loosen over time.
- Always remove box spring and mattress before moving the bed.
- Lift the bed when moving it. Dragging the bed can damage the center support.
- Readjust levelers after moving the bed.

# CARLISLE PANEL QUEEN BED

## ASSEMBLY INSTRUCTIONS

### APPENDIX A: ADJUSTABLE MATTRESS BASE ASSEMBLY SUPPLEMENT



AN ADJUSTABLE MATTRESS BASE IS A FREESTANDING MATTRESS SUPPORT THAT SITS WITHIN THE PERIMETER OF THE BED FRAME.

IF USING THIS BED FRAME WITH A STANDARD BOX SPRING OR FOUNDATION THESE INSTRUCTIONS DO NOT APPLY.

PRE-ASSEMBLED SIDE RAIL CLEATS OBSTRUCT ADJUSTABLE BASE INSTALLATION AND OPERATION. FOLLOW THESE INSTRUCTIONS TO REMOVE THEM.

THE FOLLOWING PARTS ARE NOT REQUIRED FOR ADJUSTABLE MATTRESS BASE INSTALLATION:

C. SLAT ROLL :1 SET


5. WOOD SCREW (4x30mm) :11 PCS

E. CENTER SLAT SUPPORT :1 PC

F. SLAT SUPPORT LEG :5 PCS

#### STEP 1:

USE ALLEN KEY (6) IN BOX #2 TO UNSCREW ALLEN BOLTS AND REMOVE PRE-ASSEMBLED SIDE RAIL CLEATS.

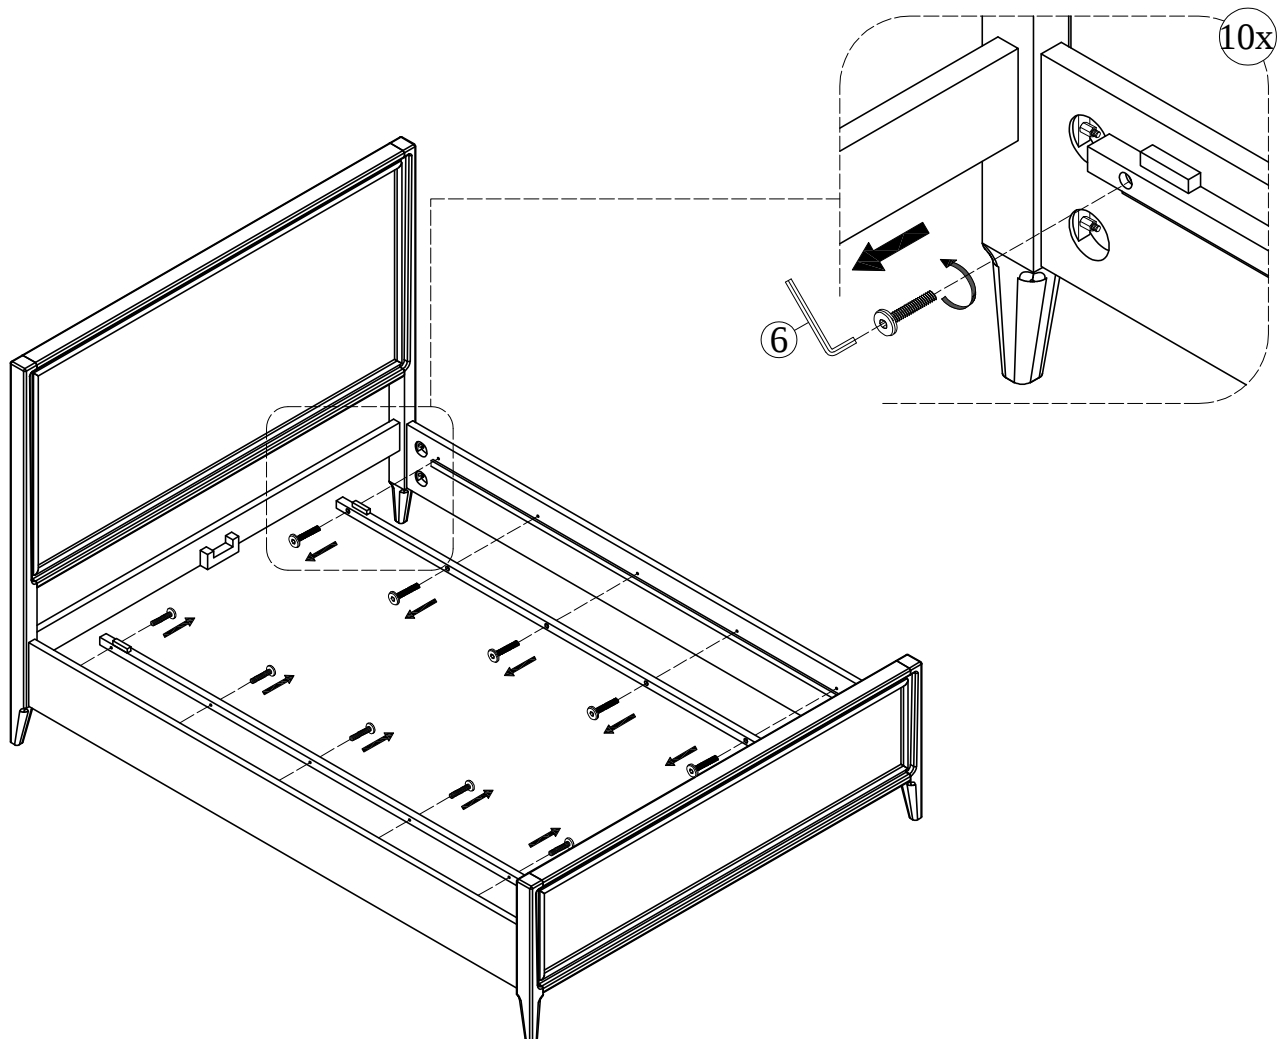

NOTE: YOU MAY WISH TO RETAIN UNUSED PARTS IF IN THE FUTURE YOU INTEND TO USE THE BED FRAME WITH A STANDARD BOX SPRING OR FOUNDATION.

# CARLISLE PANEL KING BED


## ASSEMBLY INSTRUCTIONS



### PARTS PACKING CONFIGURATIONS


**BOX #1:**  
A. HEADBOARD

1 PC

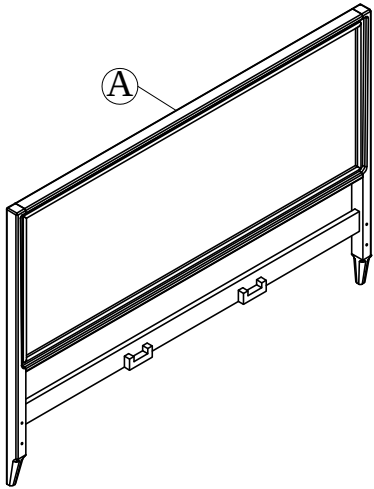


**BOX #2:**  
B. FOOTBOARD  
C. SLAT ROLL

1 PC  
1 SET


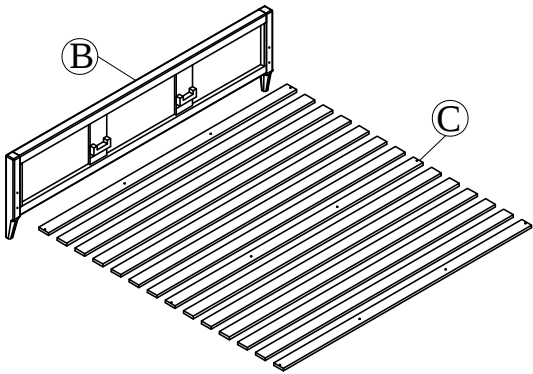


**BOX #3:**  
D. SIDE RAILS  
E. CENTER SLAT SUPPORT  
F. SLAT SUPPORT LEG

2 PCS  
2 PCS  
10 PCS

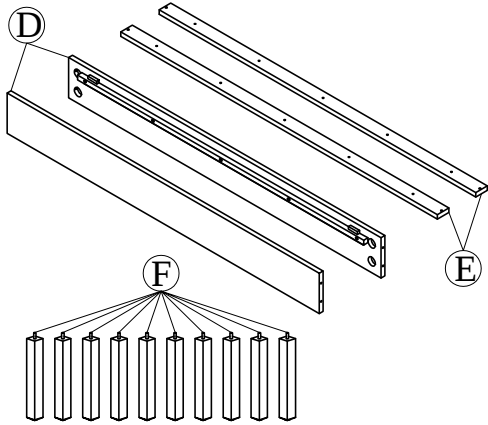

### FULLY ASSEMBLED

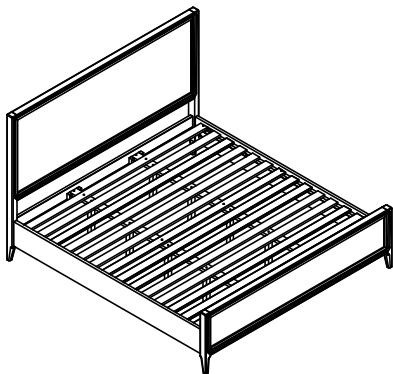


Not provided

### HARDWARE KIT PACKED IN BOX #2

| No. | Description                  | Image | Quantity |
|-----|------------------------------|-------|----------|
| 1   | THREADED BOLT (8x90mm)       |       | 8 PCS    |
| 2   | HALF MOON WASHER (7x14x27mm) |       | 8 PCS    |
| 3   | HEX NUT (M8)                 |       | 8 PCS    |
| 4   | WRENCH (13mm)                |       | 1 PC     |
| 5   | WOOD SCREW (4x30mm)          |       | 16 PCS   |
| 6   | ALLEN KEY (4mm)              |       | 1 PC     |

### STEP 1:

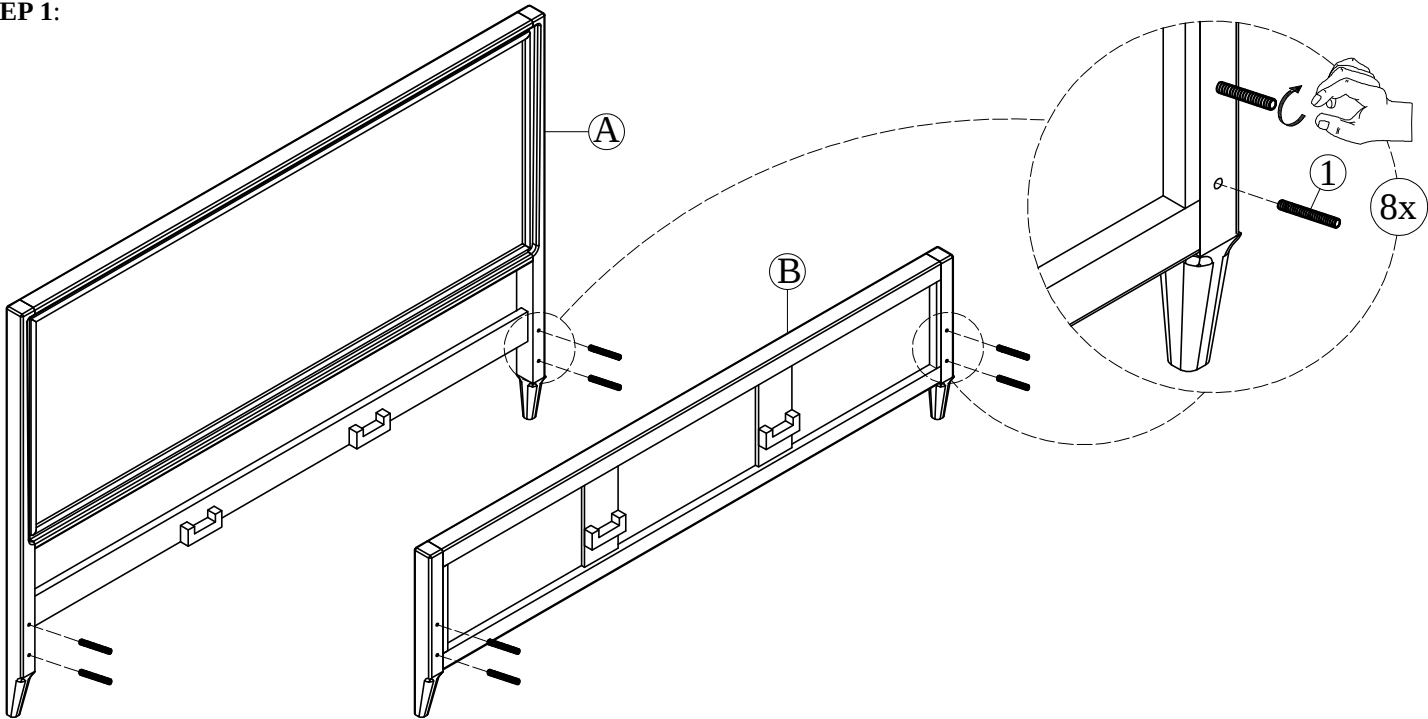


# CARLISLE PANEL KING BED


## ASSEMBLY INSTRUCTIONS



### STEP 2:

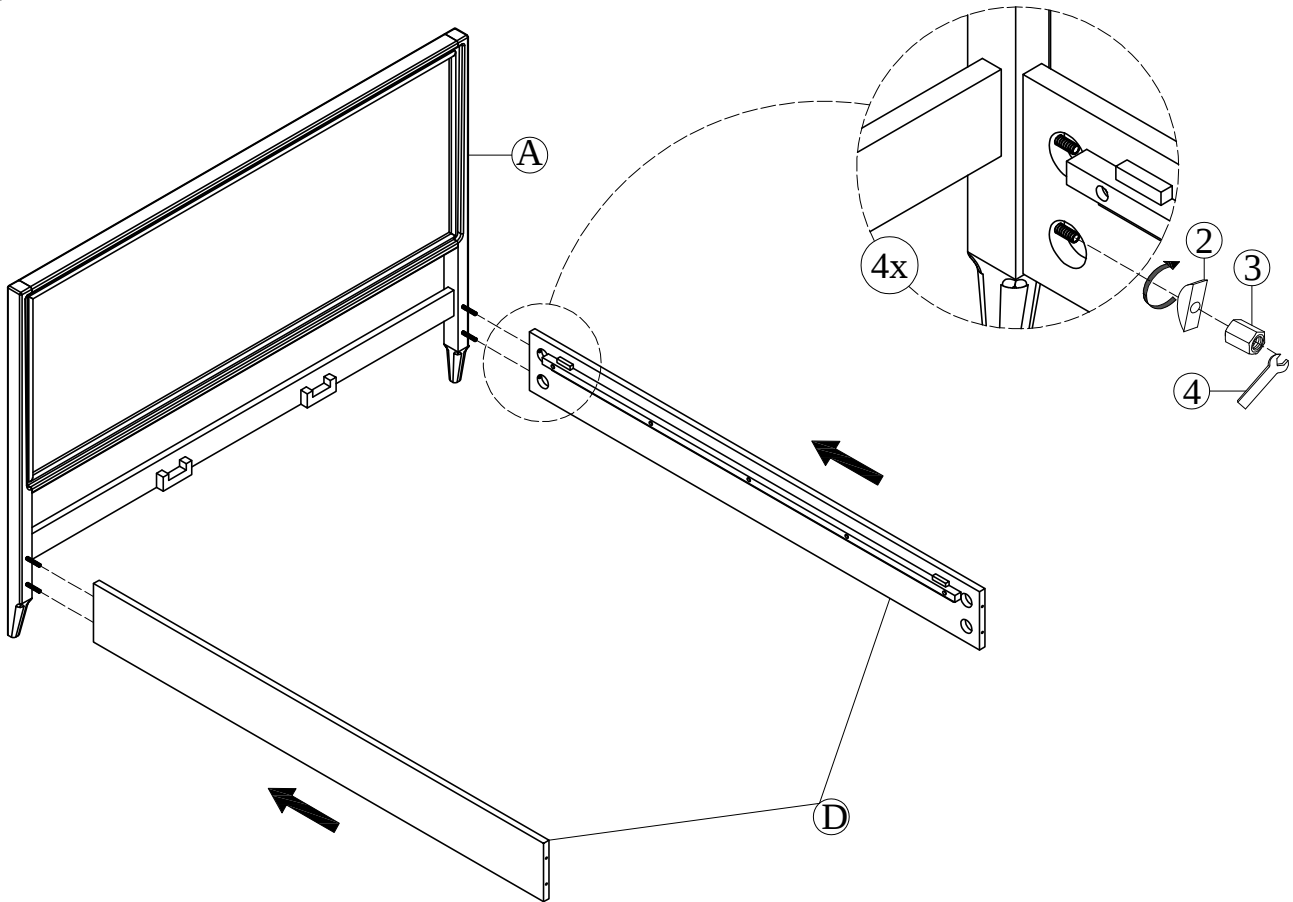

### STEP 3:

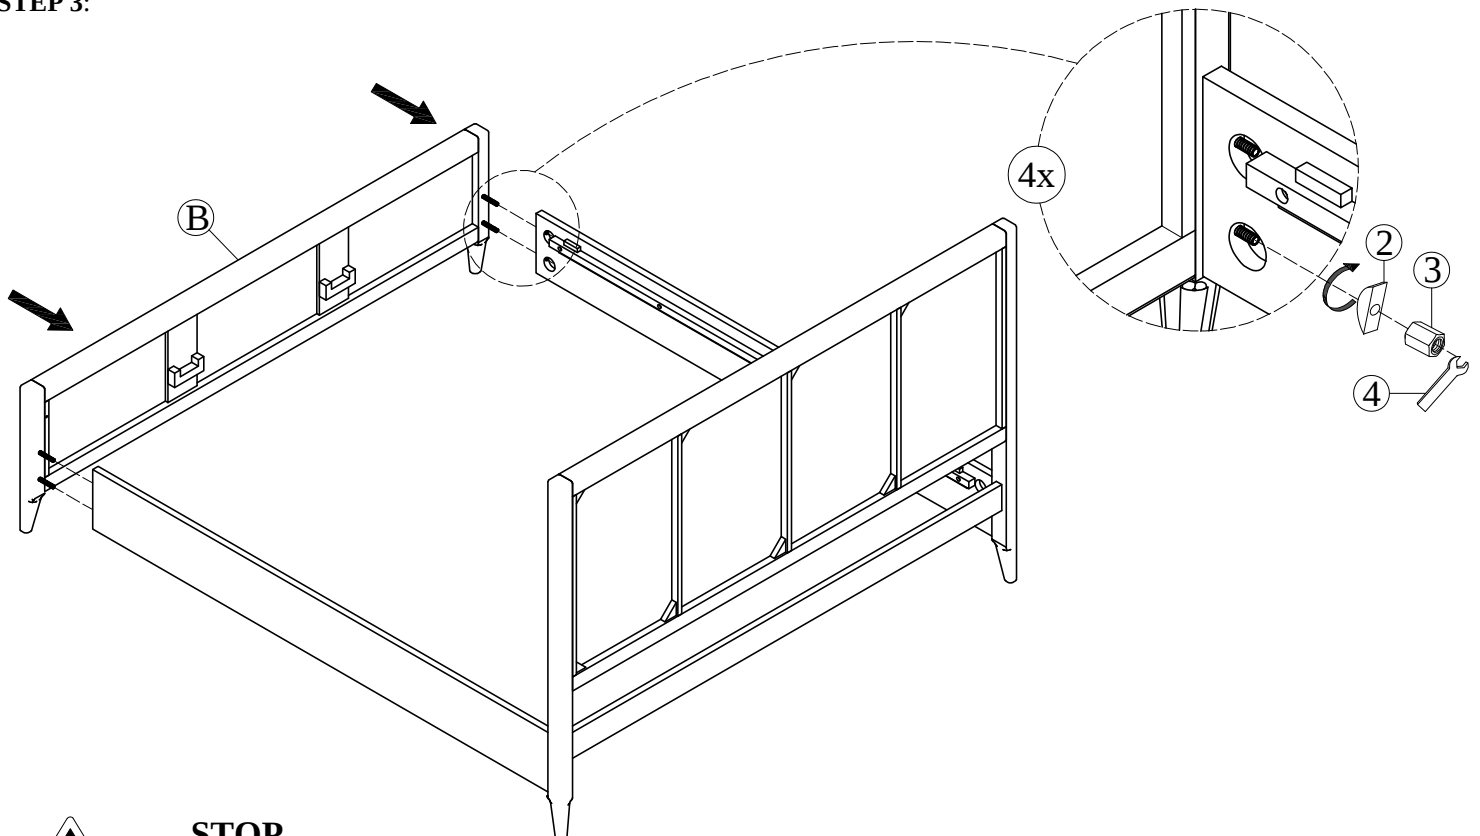

### STOP


- IF USING BED WITH AN ADJUSTABLE MATTRESS BASE, SKIP STEPS 4, 5, 6 & 7 AND REFERENCE APPENDIX A: ADJUSTABLE MATTRESS BASE ASSEMBLY SUPPLEMENT.
- IF USING BED FRAME WITH STANDARD BOX SPRING OR FOUNDATION, CONTINUE TO STEP 4

# CARLISLE PANEL KING BED


## ASSEMBLY INSTRUCTIONS



STEP 4:

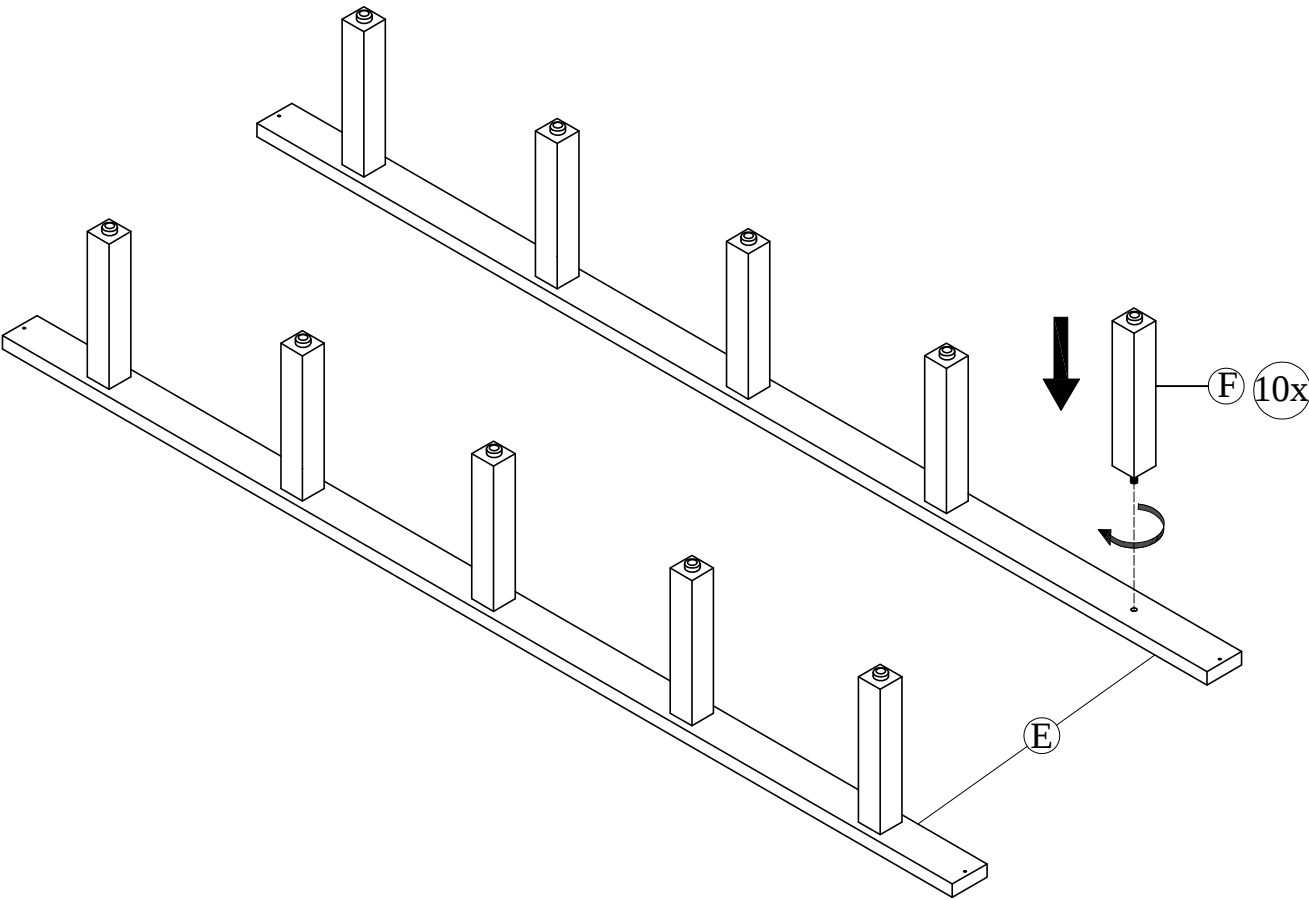

STEP 5:

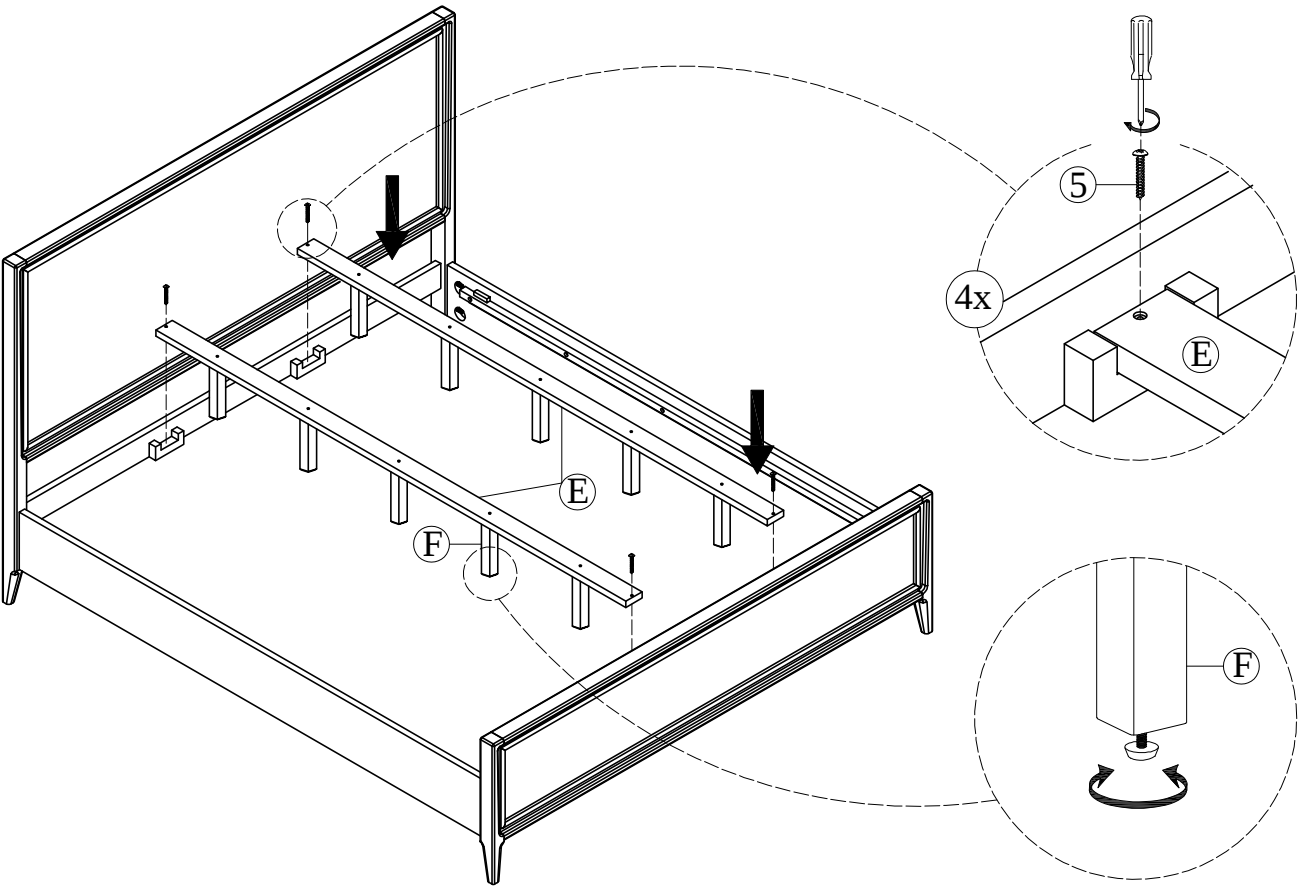


# CARLISLE PANEL KING BED


## ASSEMBLY INSTRUCTIONS



### STEP 6:

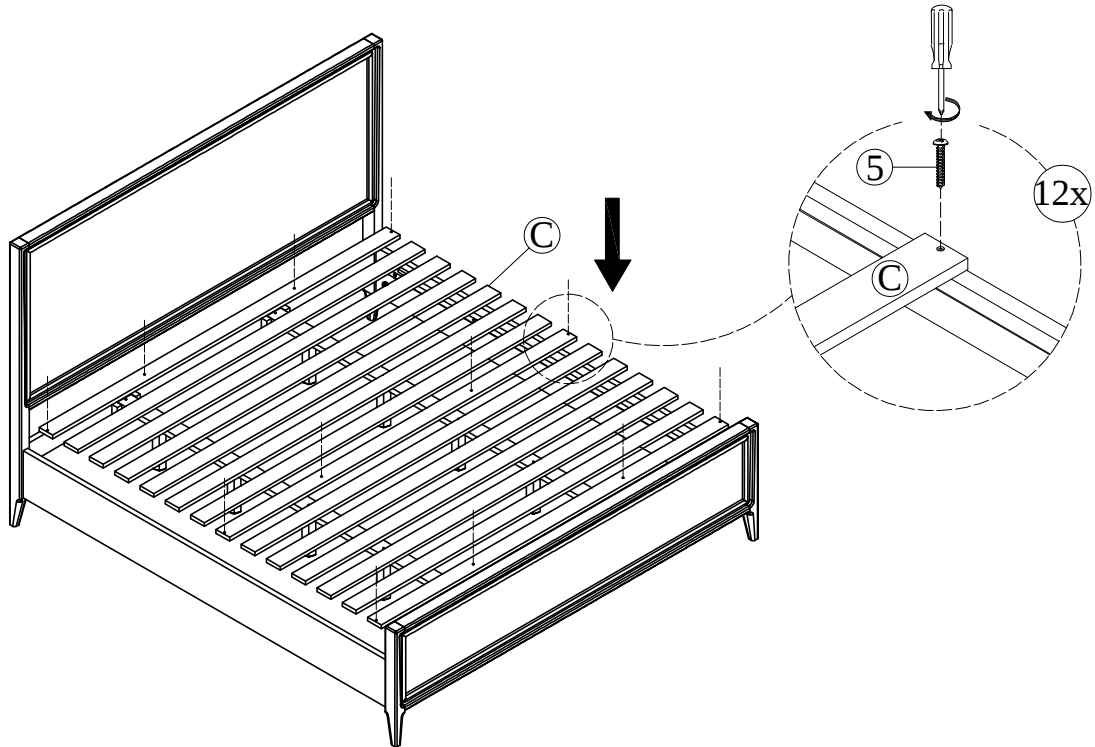

### STEP 7:

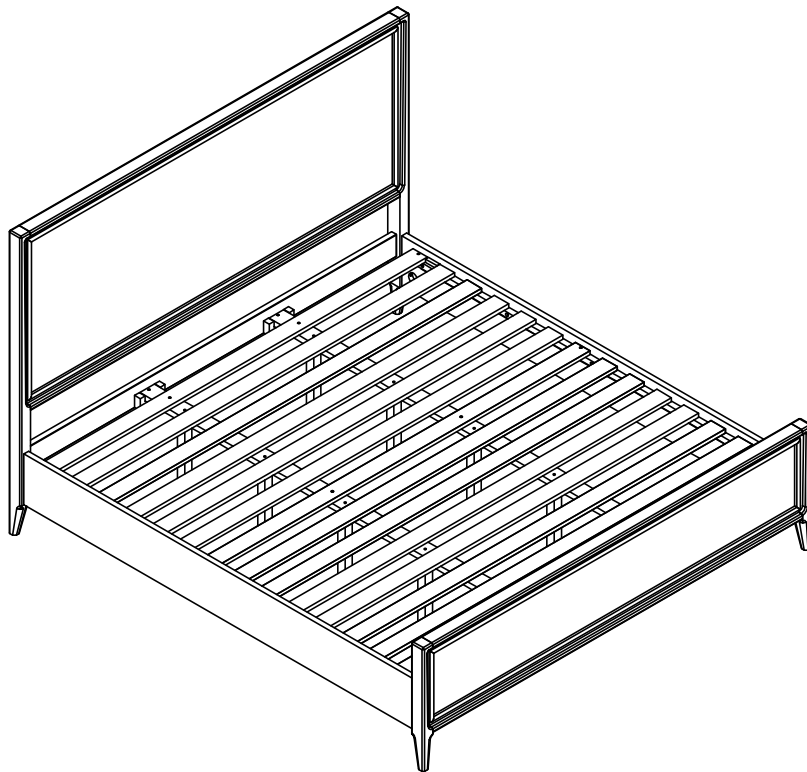


ASSEMBLY COMPLETE

#### INSTRUCTIONS FOR ADJUSTING LEVELERS:

Position the bed in your space and locate the leveler under each support leg.

Turn the leveler counter-clockwise to extend the leveler and clockwise to retract it.

Adjust each leveler until each support leg is applying equal, upward pressure on the support slat.



#### MAINTENANCE INSTRUCTIONS:

- Periodically check all fittings and tighten if necessary, as they can loosen over time.
- Always remove box spring and mattress before moving the bed.
- Lift the bed when moving it. Dragging the bed can damage the center support.
- Readjust levelers after moving the bed.

# CARLISLE PANEL KING BED

## ASSEMBLY INSTRUCTIONS



### APPENDIX A: ADJUSTABLE MATTRESS BASE ASSEMBLY SUPPLEMENT

AN ADJUSTABLE MATTRESS BASE IS A FREESTANDING MATTRESS SUPPORT THAT SITS WITHIN THE PERIMETER OF THE BED FRAME.

IF USING THIS BED FRAME WITH A STANDARD BOX SPRING OR FOUNDATION THESE INSTRUCTIONS DO NOT APPLY.


PRE-ASSEMBLED SIDE RAIL CLEATS OBSTRUCT ADJUSTABLE BASE INSTALLATION AND OPERATION. FOLLOW THESE INSTRUCTIONS TO REMOVE THEM.

THE FOLLOWING PARTS ARE NOT REQUIRED FOR ADJUSTABLE MATTRESS BASE INSTALLATION:

|                        |         |                        |         |
|------------------------|---------|------------------------|---------|
| C. SLAT ROLL           | :1 SET  | 5. WOOD SCREW (4x30mm) | :16 PCS |
| E. CENTER SLAT SUPPORT | :2 PCS  |                        |         |
| F. SLAT SUPPORT LEG    | :10 PCS |                        |         |

#### STEP 1:

USE ALLEN KEY (6) IN BOX #2 TO UNSCREW ALLEN BOLTS AND REMOVE PRE-ASSEMBLED SIDE RAIL CLEATS.

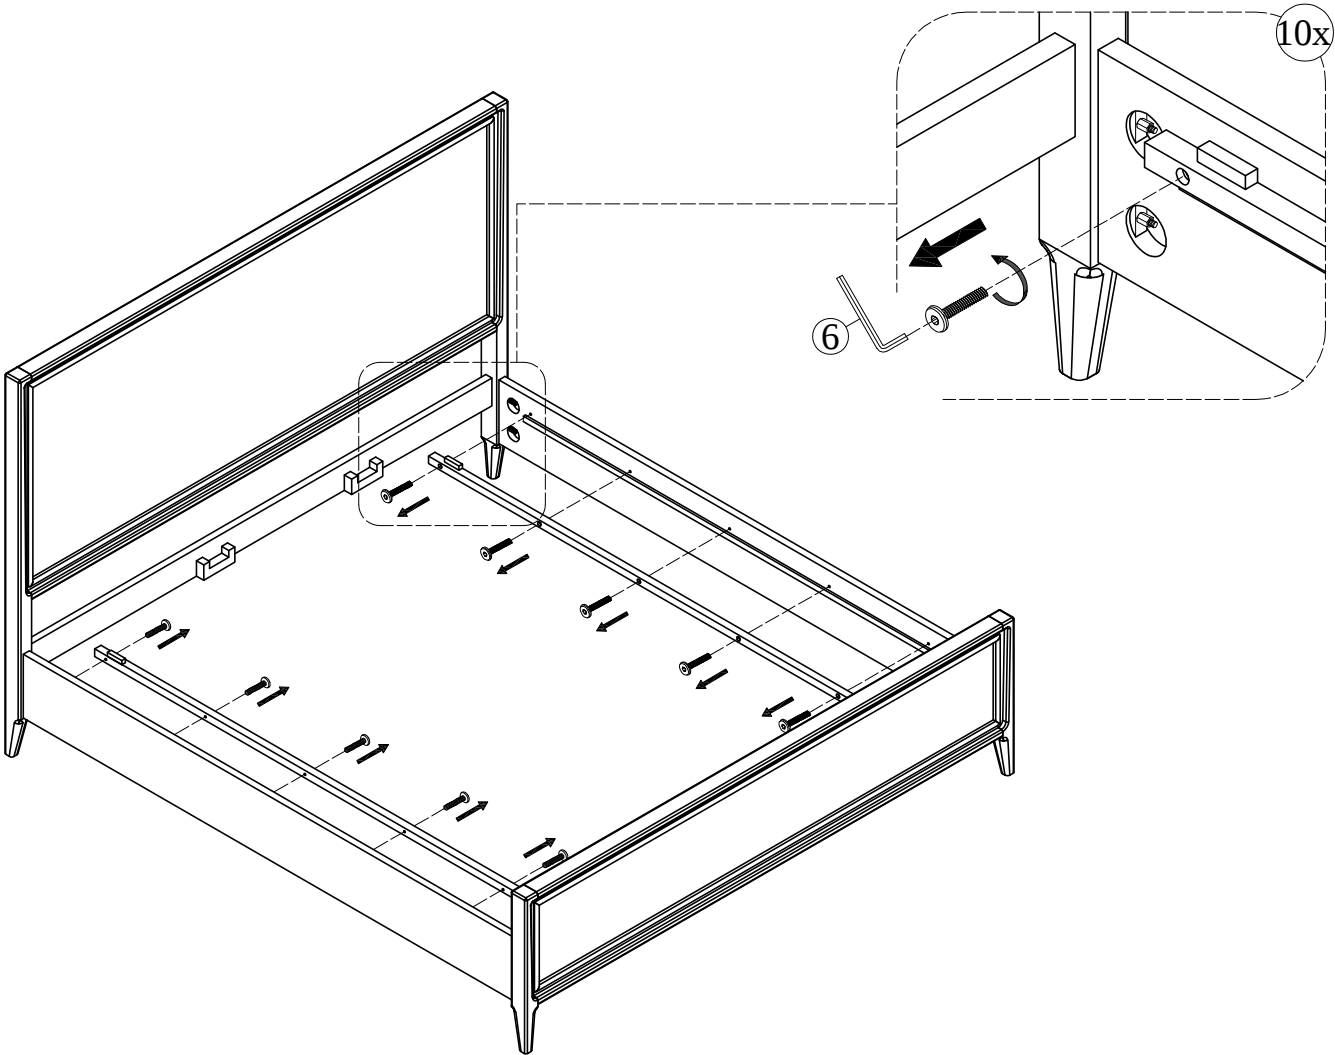

NOTE: YOU MAY WISH TO RETAIN UNUSED PARTS IF IN THE FUTURE YOU INTEND TO USE THE BED FRAME WITH A STANDARD BOX SPRING OR FOUNDATION.

# CARLISLE PANEL CAL.KING BED


## ASSEMBLY INSTRUCTIONS



### PARTS PACKING CONFIGURATIONS


**BOX #1:**  
A. HEADBOARD

1 PC

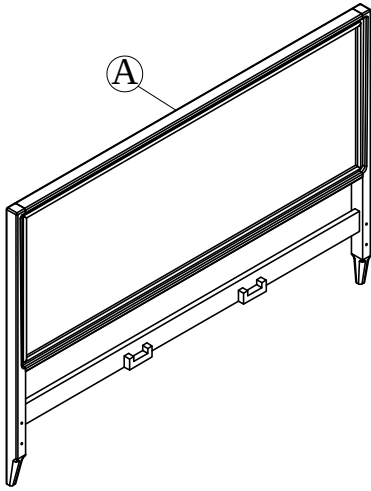


**BOX #2:**  
B. FOOTBOARD  
C. SLAT ROLL

1 PC  
1 SET

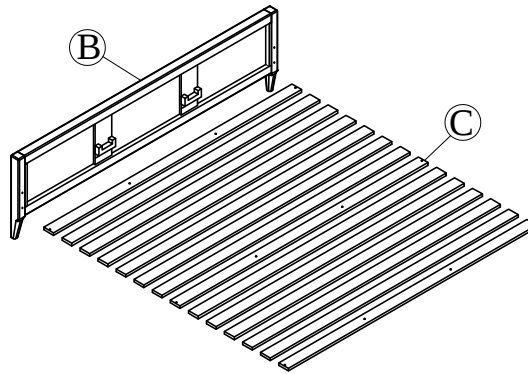


**BOX #3:**  
D. SIDE RAILS  
E. CENTER SLAT SUPPORT  
F. SLAT SUPPORT LEG  
G. MATTRESS SPACER

2 PCS  
2 PCS  
10 PCS  
2 PCS

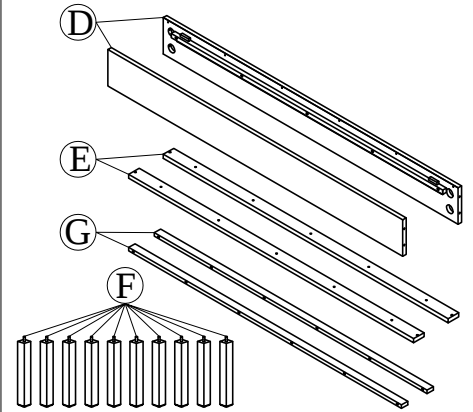

### FULLY ASSEMBLED

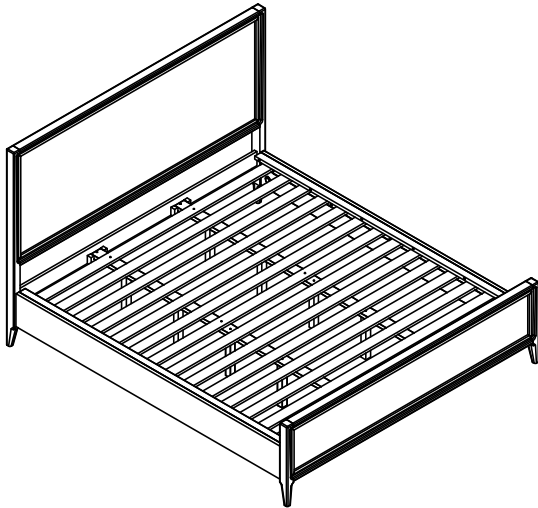


### HARDWARE KIT PACKED IN BOX #2

| No. | Description                  | Image | Quantity |
|-----|------------------------------|-------|----------|
| 1   | THREADED BOLT (8x90mm)       |       | 8 PCS    |
| 2   | HALF MOON WASHER (7x14x27mm) |       | 8 PCS    |
| 3   | HEX NUT (M8)                 |       | 8 PCS    |
| 4   | WRENCH (13mm)                |       | 1 PC     |
| 5   | WOOD SCREW (4x30mm)          |       | 16 PCS   |

### HARDWARE KIT PACKED IN BOX #3

| No. | Description         | Image | Quantity |
|-----|---------------------|-------|----------|
| 6   | ALLEN KEY (4mm)     |       | 1 PC     |
| 7   | ALLEN BOLT (6x60mm) |       | 12 PCS   |
| 8   | SPRING WASHER (M6)  |       | 12 PCS   |
| 9   | FLAT WASHER (M6)    |       | 12 PCS   |



Not provided


# CARLISLE PANEL CAL.KING BED

## ASSEMBLY INSTRUCTIONS




### STEP 1:

NOTE: USE HARDWARE PACKED IN BOX #2 FOR STEPS 1, 2, 3, 5 & 6

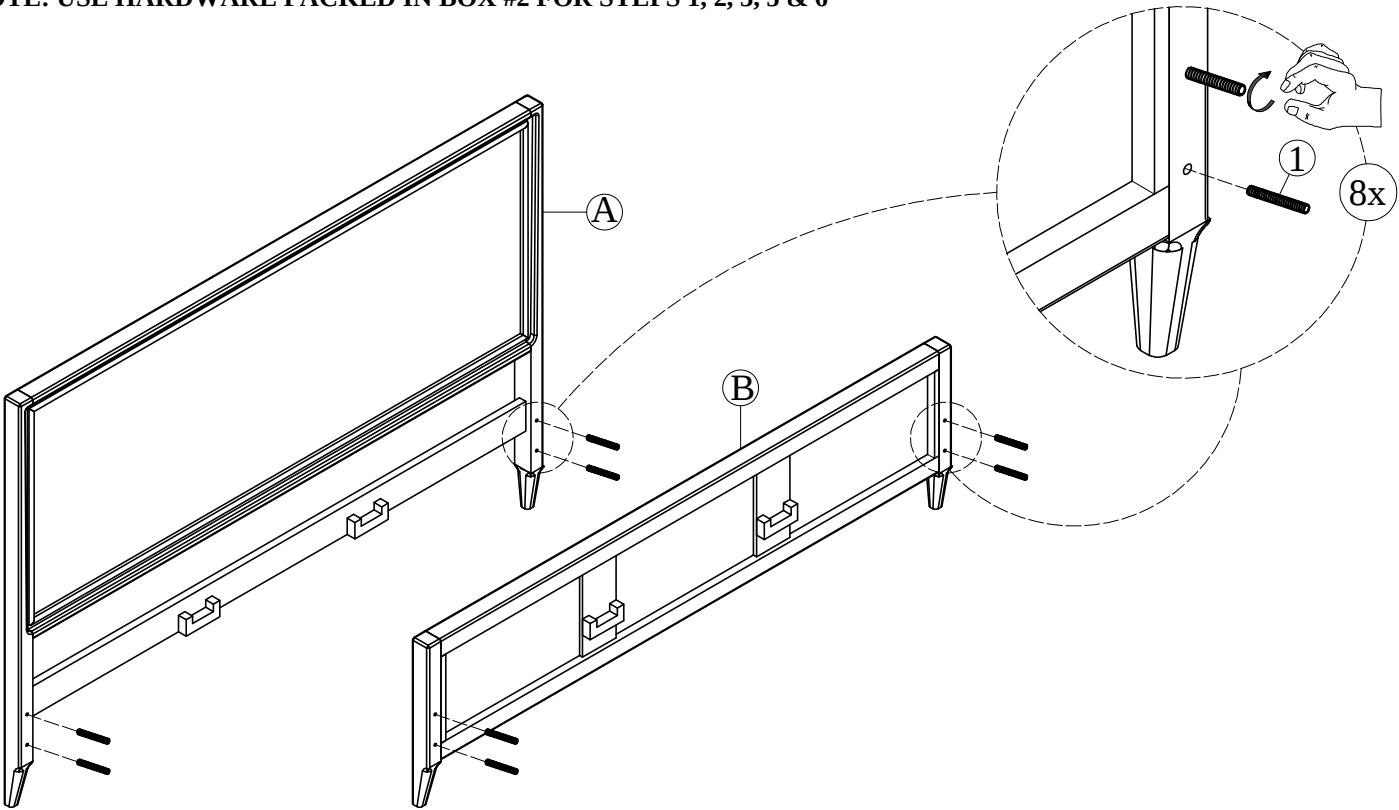

### STEP 2:

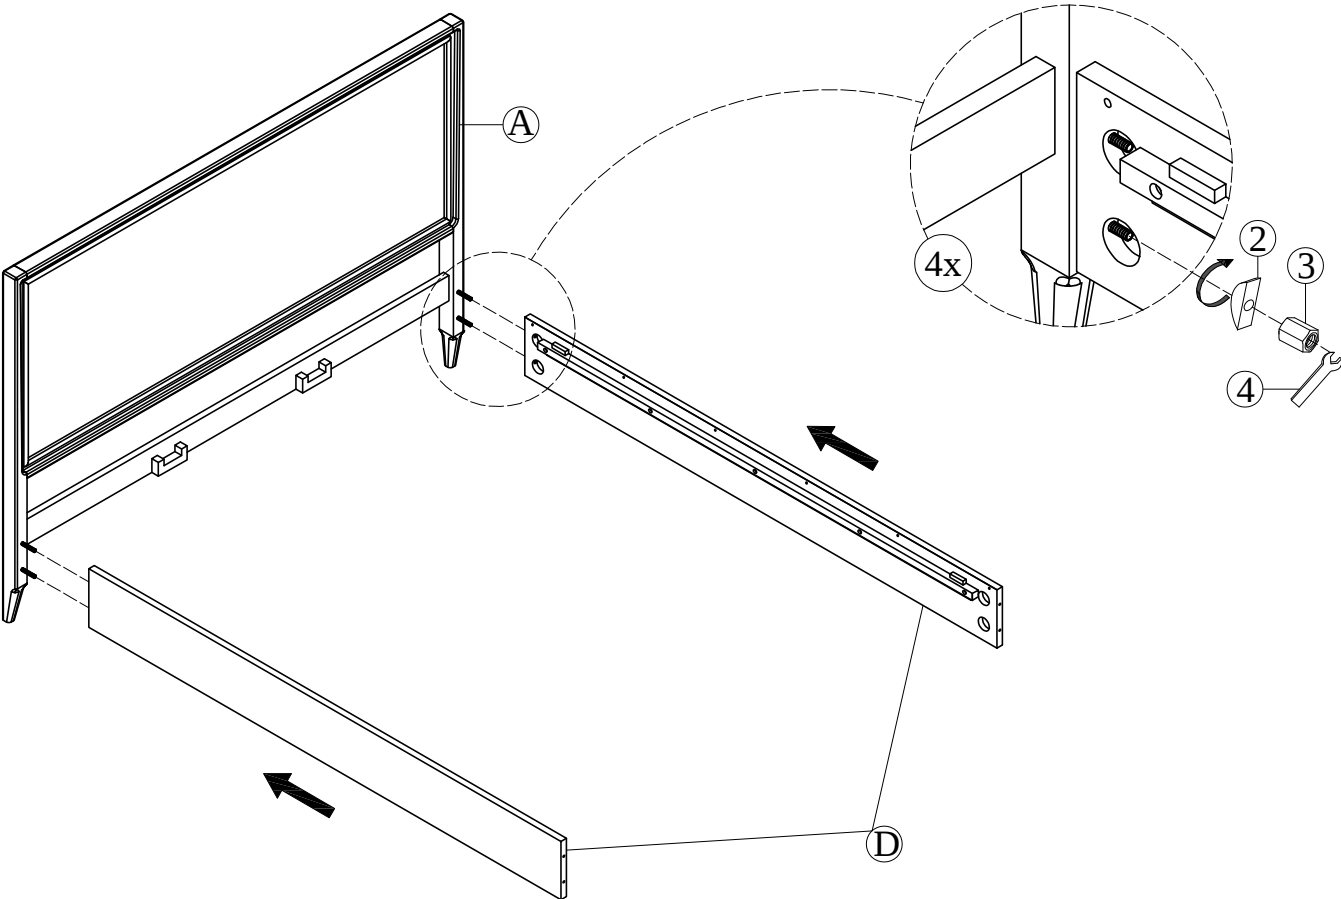


# CARLISLE PANEL CAL.KING BED

## ASSEMBLY INSTRUCTIONS




### STEP 3:

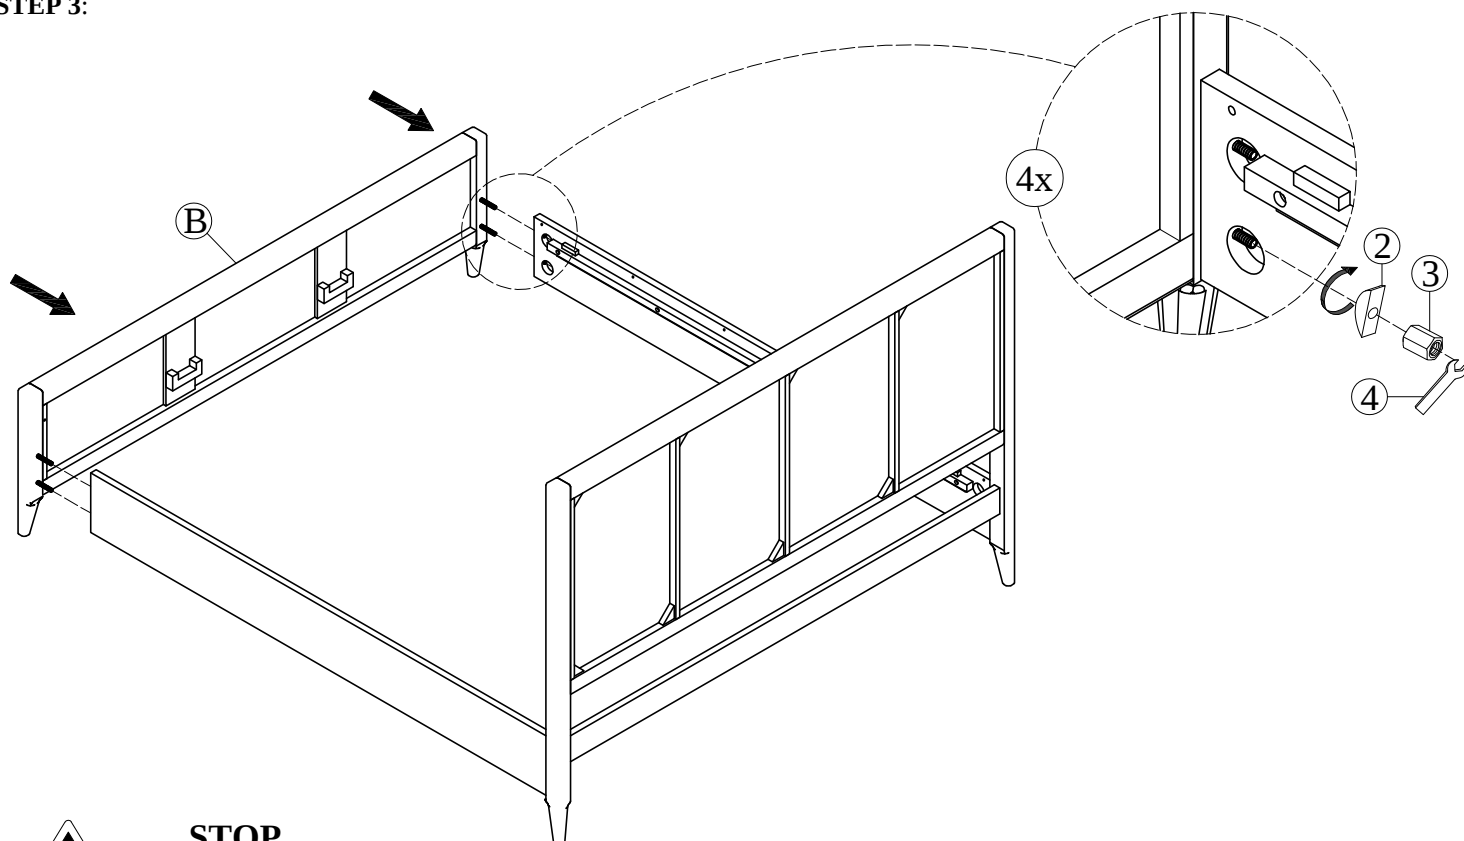

### STOP

- IF USING BED WITH AN ADJUSTABLE MATTRESS BASE, SKIP STEPS 4, 5, 6, 7 & 8 AND REFERENCE APPENDIX A: ADJUSTABLE MATTRESS BASE ASSEMBLY SUPPLEMENT.
- IF USING BED FRAME WITH STANDARD BOX SPRING OR FOUNDATION, CONTINUE TO STEP 4

### STEP 4:

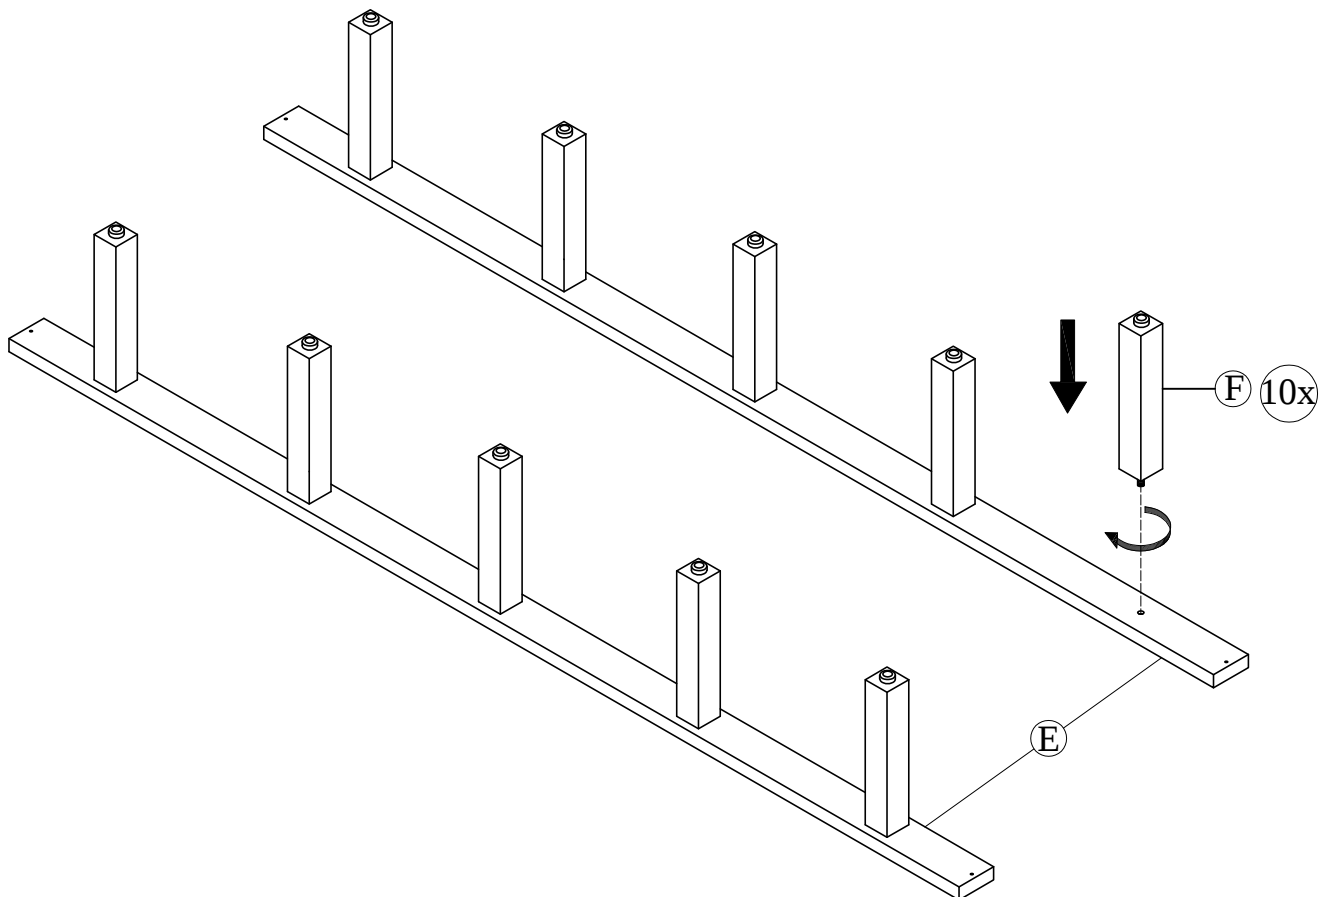


# CARLISLE PANEL CAL.KING BED


## ASSEMBLY INSTRUCTIONS



STEP 5:

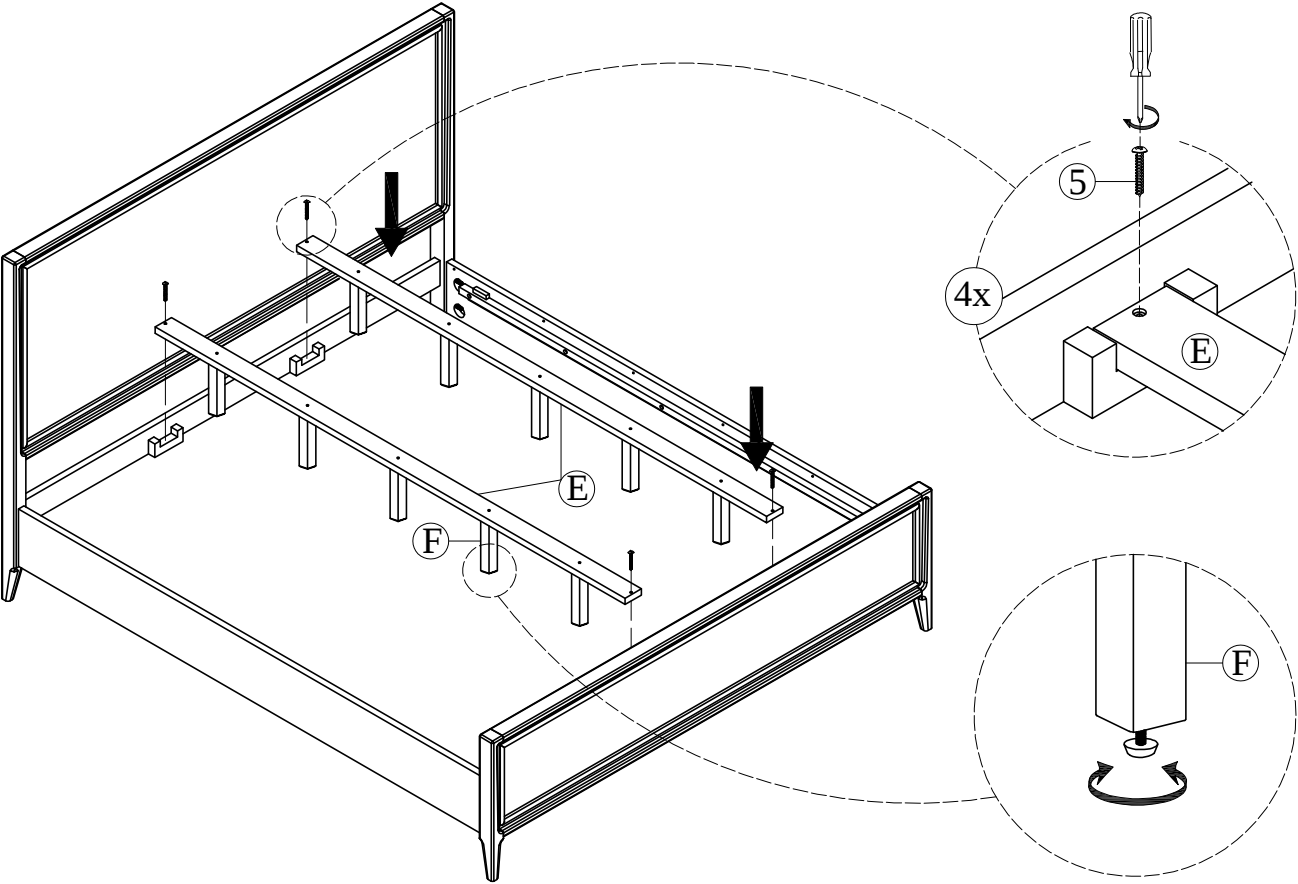

STEP 6:

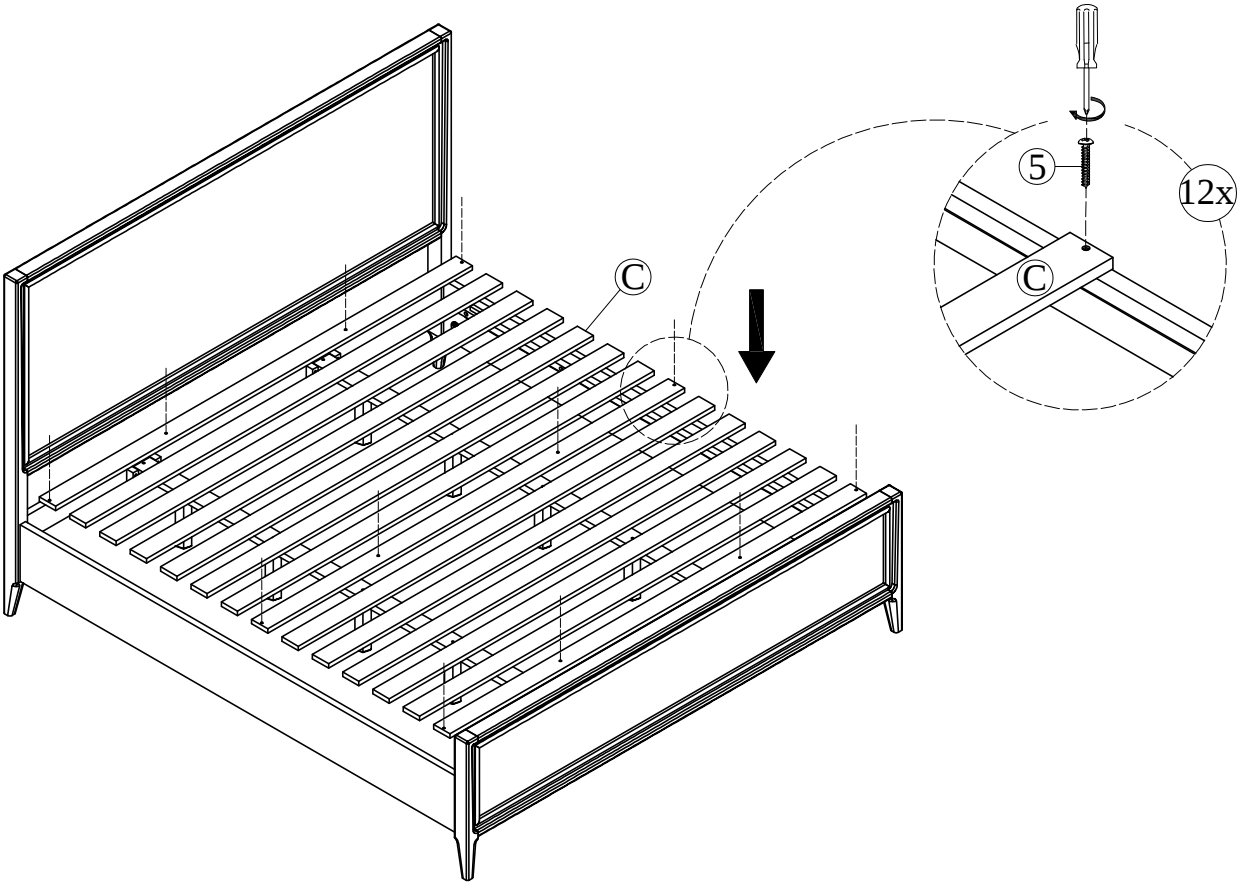


# CARLISLE PANEL CAL.KING BED


## ASSEMBLY INSTRUCTIONS



### STEP 7:

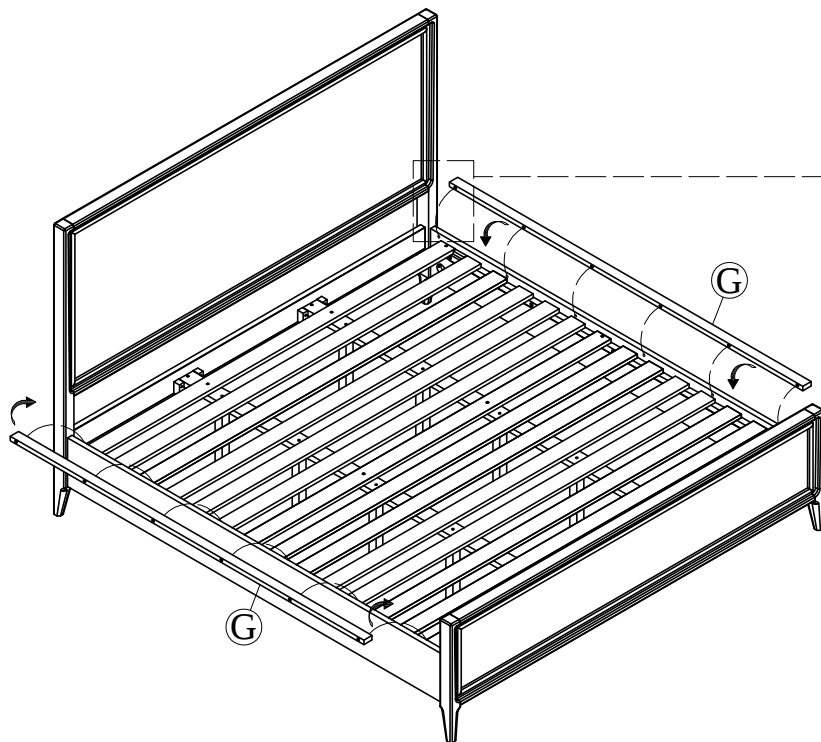

### STEP 8:

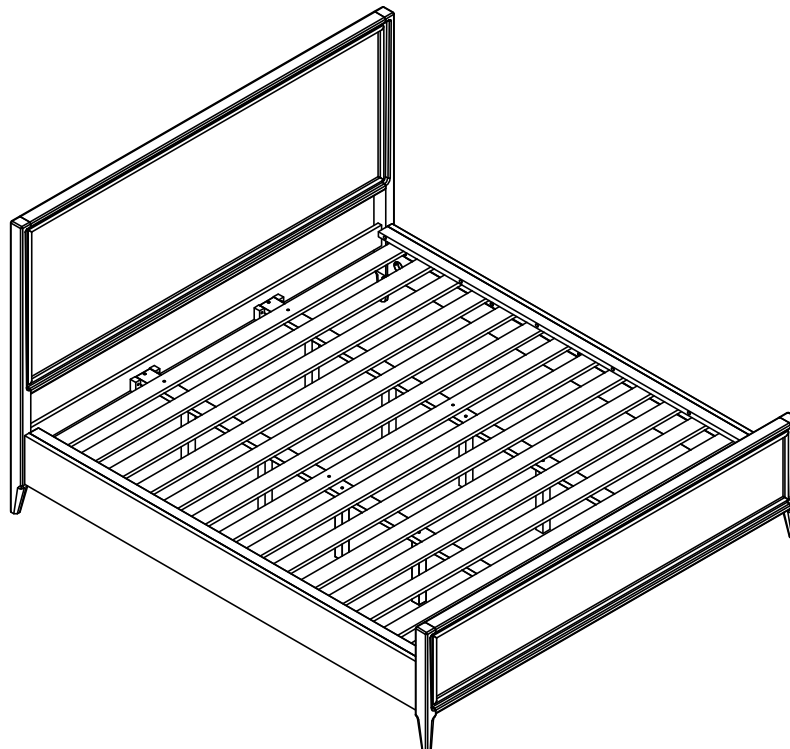


ASSEMBLY COMPLETE

#### INSTRUCTIONS FOR ADJUSTING LEVELERS:

Position the bed in your space and locate the leveler under each support leg.

Turn the leveler counter-clockwise to extend the leveler and clockwise to retract it.

Adjust each leveler until each support leg is applying equal, upward pressure on the support slat.



#### MAINTENANCE INSTRUCTIONS:

- Periodically check all fittings and tighten if necessary, as they can loosen over time.
- Always remove box spring and mattress before moving the bed.
- Lift the bed when moving it. Dragging the bed can damage the center support.
- Readjust levelers after moving the bed.

# CARLISLE PANEL CAL.KING BED

## ASSEMBLY INSTRUCTIONS

### APPENDIX A: ADJUSTABLE MATTRESS BASE ASSEMBLY SUPPLEMENT



AN ADJUSTABLE MATTRESS BASE IS A FREESTANDING MATTRESS SUPPORT THAT SITS WITHIN THE PERIMETER OF THE BED FRAME.

IF USING THIS BED FRAME WITH A STANDARD BOX SPRING OR FOUNDATION THESE INSTRUCTIONS DO NOT APPLY.


PRE-ASSEMBLED SIDE RAIL CLEATS OBSTRUCT ADJUSTABLE BASE INSTALLATION AND OPERATION. FOLLOW THESE INSTRUCTIONS TO REMOVE THEM.

THE FOLLOWING PARTS ARE NOT REQUIRED FOR ADJUSTABLE MATTRESS BASE INSTALLATION:

|                        |         |                        |         |
|------------------------|---------|------------------------|---------|
| C. SLAT ROLL           | :1 SET  | 5. WOOD SCREW (4x30mm) | :16 PCS |
| E. CENTER SLAT SUPPORT | :2 PCS  | 7. ALLEN BOLT (6x60mm) | :12 PCS |
| F. SLAT SUPPORT LEG    | :10 PCS | 8. SPRING WASHER (M6)  | :12 PCS |
| G. MATTRESS SPACER     | :2 PCS  | 9. FLAT WASHER (M6)    | :12 PCS |

#### STEP 1:

USE ALLEN KEY (6) IN BOX #3 TO UNSCREW ALLEN BOLTS AND REMOVE PRE-ASSEMBLED SIDE RAIL CLEATS.

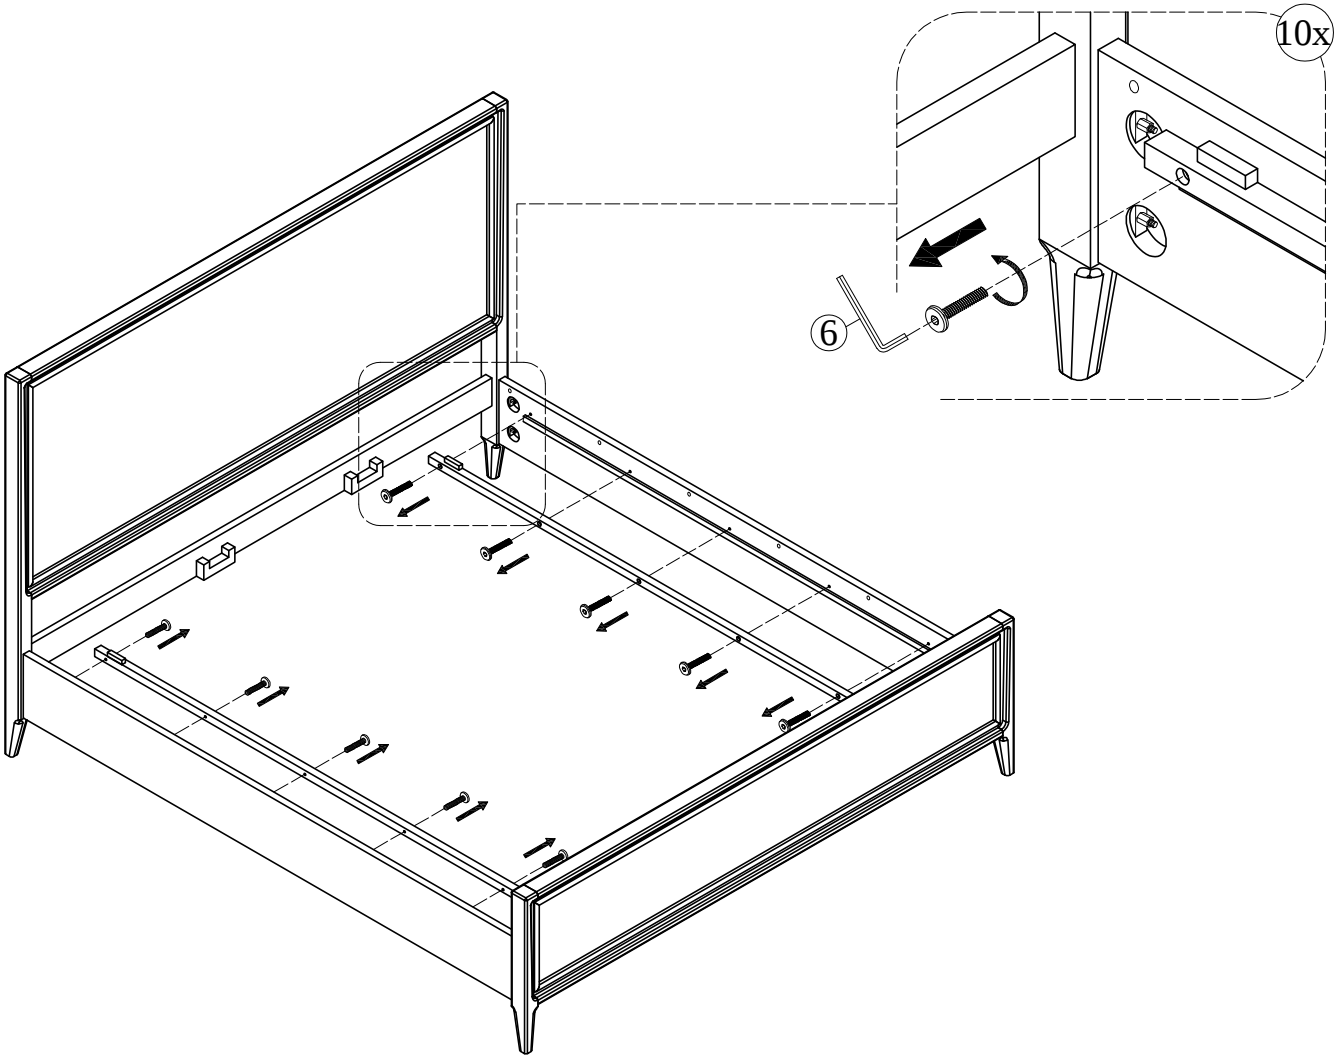

NOTE: YOU MAY WISH TO RETAIN UNUSED PARTS IF IN THE FUTURE YOU INTEND TO USE THE BED FRAME WITH A STANDARD BOX SPRING OR FOUNDATION.