

3M™ Clean Sanding for Superior Performance

Discs cut and last longer when dust isn't loading the cutting surface of the abrasives. And reducing dust is easier than ever with 3M™ Clean Sanding Discs. Featuring 3M-proprietary, precise multi-hole patterns, these discs can evacuate dust better than 5- or 6-hole products — dramatically increasing disc life and cut rate.





See selection guide on page 6.

All-Purpose



<u>Premium:</u> Best in class all-around performing disc whether for removing sanding marks or preparing surface for painting.

Good: All-around sanding disc for intermediate sanding steps of surface preparation.

735U Disc Family

- Aluminum oxide and ceramic mineral blend lasts longer and yields a uniform finish
- Mid-weight paper backing provides durable foundation for mineral



- Film backing for durability and uniform finish
- Aluminum oxide mineral for fast cut



Fine Finish



Finest finishing disc for preparing the surface for staining or creating a high quality final smooth surface.

426U Disc Family

- Silicon carbide mineral for fine and consistent finish
- Light weight paper backing for greater conformability



Edges and Corners



Disc durable enough to handle corners and edges while still providing flexibility.

202DZ Disc Family

- Durable cloth backing minimizes edge wear while still providing flexibility
- Aluminum oxide mineral for fast cut





See selection guide on page 6.

All-Purpose



Premium: Best in class all-around performing disc whether for removing sanding marks, removing coatings or retouching a coating.

Good: All-around sanding disc for intermediate sanding steps of surface preparation.

3M™ Cubitron™ II 775L Disc Family

- Precision-shaped ceramic and aluminum oxide blend for fast cut rate and long life
- Film backing for greater durability



375L Disc Family

- Aluminum oxide mineral for fast cut
- Film backing for greater durability



Finishing



Disc for surface finishing for gel coat applications.

360L Disc Family

- Aluminum oxide mineral for long life
- Film backing for durability
- Non-stearated disc



Edges and Corners



Disc durable enough to handle corners and edges while still providing flexibility.

202DZ Disc Family

- Aluminum oxide mineral for fast cut
- Durable cloth backing minimizes edge wear while still providing flexibility



Metal

For stock removal, light weld blending and paint preparation of metal surfaces from carbon steel to aluminum.

Primary Industries:

- Equipment
- Construction
- Metal Fabrication
- Transportation



See selection guide on page 6.

All-Purpose



Premium: Best in class all-around performing disc whether for deburring, removing discoloration or preparing the surface for painting.

Good: All-around sanding disc for intermediate sanding steps of surface preparation.

3M™ Cubitron™ II 775L Disc Family

- Precision-shaped ceramic and aluminum oxide blend for fast cut rate and long life
- Film backing for greater durability



- Aluminum oxide mineral for fast cut
- Film backing for greater durability



Aggressive Sanding



Aggressive sanding disc completes burr and weld removal and also finishes.

763U Disc Family

- Aluminum oxide and ceramic blend for fast cut rate and long life
- Heavier paper backing for tear resistance



Edges and Corners



Disc durable enough to handle sharp corners and edges while still providing a fast cut rate.

341D Disc Family

 Heavier cloth backing to avoid edge wear



Abrasives Selection Guide

	Sul	bstr	ate	Technical Specs					Standard Grade Availability**																					
3M ID	Wood	Metal	Composites	Mineral	Backing	Backing Weight	Anti-Loading Coating	Form Availability*	24	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	009	800	1000	1200	1500
Cubitron™ II 775L	•	•	•	Precision- Shaped Ceramic & Aluminum Oxide	Film	3 mil	✓	S,H, CS						+		+	+	+	+											
763U		•	•	Aluminum Oxide & Ceramic	Paper	F		S,H, CS					Α	Α	Р	Р														
735U	•	•	•	Aluminum Oxide & Ceramic	Paper	С	~	S,H, CS						Р	Р	Р	Р	Р	Р											
426U	•		•	Silicon Carbide	Paper	А	~	S,H, CS						Α	Α	А	Α	Α	Α	Α	Α	Α		Α						
375L	•	•	•	Aluminum Oxide	Film	5 mil	~	S,H, CS					Α	Р	Р	Р	Р	Р	Р	Р		Р		Р	Р	Р	Р	Р	Р	Р
341D		•		Aluminum Oxide	Cloth	х		S		Α		Α	Α	Α	Р	Р		Р												
360L			•	Aluminum Oxide	Film	3 mil		S,H, CS											Р	Р	Р	Р		Р	Р	Р	Р	Р		
202DZ	•	•	•	Aluminum Oxide	Cloth	J		S						Α	Р	Р	Р	Р	Р											
236U	•	•	•	Aluminum Oxide	Paper	С	~	S,H, CS						Р	Р	Р	Р	Р	Р	Р		Р		Р	Р					

^{*} Form Availability
S = 3M™ Stikit™ Disc
H = 3M™ Hookit™ Disc
CS = 3M™ Clean Sanding Disc

A = ANSI (American National Standards Institute) grades

P = FEPA (Federation of the European Producers of Abrasives) grades

+ = 3M™ PSG (Precision Shaped Grain) grade

And Don't Forget... All-Purpose, All Applications



<u>Good:</u> Multi-purpose disc for a wide range of sanding applications.

236U Disc Family

- Aluminum oxide on a C wt paper backing
- Durable, tear resistant backing




^{**} Standard Grade Availability



We took our best line of air-powered 3M™ Random Orbital Sanders and made it even better.

- Exclusive 3M[™] Gripping Material
- Extended, curved wrist rest for more support
- Recessed lever, eliminating pinch points
- Internal muffler won't break off and decreases noise by as much as 6 dB
- Durable composite cover helps prevent cracked housings
- Improved dust collection port

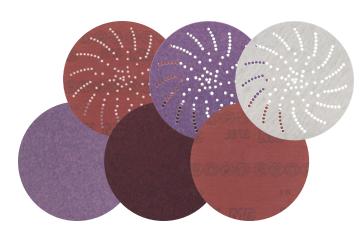

Complete the 3M System with a Random Orbital Sander

Select the orbit that's right for your project.

3/8" Diameter Orbit most aggressive sanding





Gold - 3/8"

5/16" Diameter Orbit aggressive sanding





Black - 5/16"

3/16" Diameter Orbit general purpose sanding





Silver - 3/16"

3/32" Diameter Orbit fine finish sanding





Chrome - 3/32"

Lever indicates orbit diameter.

Tech Tip

Start on... Stop off... A simple rule of thumb to prevent unnecessary swirl marks on the work surface. Start the sander on the work surface, stop the tool as it is removed from the work surface. For best results, operate tool at 90 PSI air pressure.



3M

Abrasive Systems Division 3M Center, Building 223-6S-03 St. Paul, MN 55144 USA

Phone 1-866-279-1235 Web 3M.com/Abrasives Product Use: Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. Given the variety of factors that can affect the use and performance of a 3M product, user is solely responsible for evaluating the 3M product and determining whether it is fit for a particular purpose and suitable for user's method of application. Warranty, Limited Remedy, and Disclaimer: Unless an additional warranty is specifically stated on the applicable 3M product packaging or product literature, 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY OR CONDITION ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. If the 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price. Limitation of Liability: Except where prohibited by law, 3M will not be liable for any loss or damage arising from the 3M product, negligence or strict liability.

3M, Cubitron, Hookit and Stikit are trademarks of 3M. Used under license in Canada. Please recycle. Printed in USA. © 3M 2016. All rights reserved. 61-5002-8408-0