INSTALLATION INSTRUCTIONS

Please read carefully and save these instructions as you may need them a later date

CAUTION

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.

GENERAL

All electrical connections must be in accordance with local and National Electrical Code(N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustration.

ASSEMBLY AND INSTALLATION

1. Carefully push fixture wires through stem (H). Screw stem (H) onto top of fixture body (J). Push fixture wires from top of stem (H) through stem(G/I). Screw stem (G/I) onto top of stem (H). Determine desired hanging height of fixture. Select the quantity of stems (H/G/I) to achieve that height. **Note: Pull fixture wires taut.**


Slip screw collar ring (E) down over end of last stem. Pull fixture wires through swivel (C). Thread swivel(C) onto top of last stem. Pull fixture wires through hole in center of canopy(D).

- 2. Carefully pull house wires through center hole in mounting bracket (A). Secure mounting plate (A) to junction box with junction box screw (B)
- 3. Pull out the outlet wire and ground wire from junction box.

Make wire connections with wire nut .

- --Ribbed wire (w/o marking) or white wire from fixture to White wire from power source.
- --Smooth wire (w marking) or black wire from fixture to Black wire from power source.
- --Ground wires from fixture to power source and tie to mounting bracket(A) with a ground screw.
- 4. Carefully raise fixture up to ceiling. Place canopy(D) of fixture over mounting bracket (A). Pass hole in center of canopy (D) over end of threaded pipe on mounting bracket (A). Screw swivel (C) onto threaded pipe protruding from canopy (D). Tighten screw collar ring (E) to secure canopy (D) to ceiling.
- 5. Screw recommended bulb (E26 Edison/A19 bulb type, not included) into socket. Verify correct bulb wattage marked on socket of fixture. WARNING: DO NOT exceed maximum bulb wattage
- 6. Turn on the power
 - INSTALLATION IS NOW COMPLETED

- A. Mounting bracket
- B. Junction box screw
- C. Swivel
- D. Canopy
- E. Screw collar ring
- F. Threaded cap
- G. 12 inch stem
- H. 6 inch stem
- I. 18 inch stem
- J. Fixture body

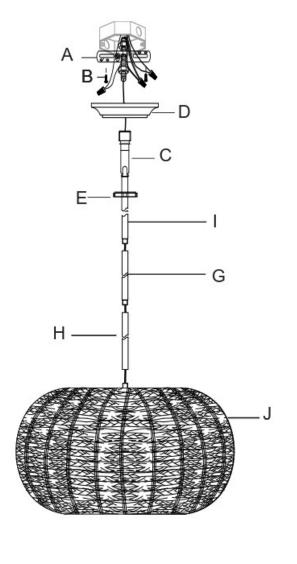

Item No.: 99301, 99302